

April 1, 2021

PG&E Letter DCL-21-022

U.S. Nuclear Regulatory Commission
ATTN: Document Control Desk
Washington, DC 20555-0001

10 CFR 50, Appendix I

Docket No. 50-275, OL-DPR-80
Docket No. 50-323, OL-DPR-82
Diablo Canyon Power Plant, Units 1 and 2
2020 Annual Radiological Environmental Operating Report

Dear Commissioners and Staff:

In accordance with Diablo Canyon Power Plant, Units 1 and 2, Technical Specification 5.6.2, Pacific Gas and Electric Company hereby submits the 2020 Annual Radiological Environmental Operating Report (AREOR). The AREOR, provided in the enclosure, covers the operation of Units 1 and 2 for the period of January 1 through December 31, 2020. This report contains material consistent with the objectives of the Offsite Dose Calculation Manual, and 10 CFR 50, Appendix I, Sections IV.B.2, IV.B.3, and IV.C.

There are no new or revised regulatory commitments in this report (as defined by NEI 99-04).

If you have any questions regarding this submittal, please contact Mr. Craig Sutton, Radiation Protection Manager, at (805) 545-4208.

Sincerely,



Paula Gerfen

Enclosure

armb/4743/50942685-7

cc: Diablo Distribution

cc/enc: Dr. Penny E. Borenstein, San Luis Obispo County Health Officer
Donald R. Krause, NRC Senior Resident Inspector
Samson S. Lee, NRC Project Manager
Scott A. Morris, NRC Region IV Administrator
Gonzalo L. Perez, Branch Chief, California Department of Public Health
John M. Robertson, Executive Officer, Central Coast Regional Water
Quality Control Board
Gary E. Willey, Air Pollution Control Officer, San Luis Obispo County Air
Pollution Control District

2020 ANNUAL RADIOLOGICAL ENVIRONMENTAL OPERATING REPORT



2020 Annual Radiological Environmental Operating Report Diablo Canyon Power Plant

January 1, 2020 - December 31, 2020



This page intentionally left blank.

2020 Diablo Canyon Power Plant

ANNUAL RADIOLOGICAL ENVIRONMENTAL OPERATING REPORT (AREOR)

January 1, 2020 - December 31, 2020

Prepared By
Pacific Gas & Electric Company
Diablo Canyon Power Plant

Prepared:



Date:

3/2/2021

Tom Hook, DCPD RP Engineer

Independent Tech Review:




Date: 3/11/21

Richard Treinen, CHP, DCPD RP Senior Engineer



Reviewed and Approved:



Date:

3/13/2021

Craig Sutton, DCPD Radiation Protection Manager

PG&E Submittal Letter DCL-21-022

This page intentionally left blank.

EXECUTIVE SUMMARY

This report contains results from the operational Radiological Environmental Monitoring Program (REMP) for Diablo Canyon Power Plant (DCPP) compiled for the period January 1, 2020 through December 31, 2020.

The purpose of the REMP was to assess the levels of radiation or radioactivity in the environment and to verify that DCPP was operating within its design parameters.

Approximately 278 environmental samples, 884 air samples, and 1440 thermo-luminescent dosimeter (TLD) phosphors were collected over the course of the 2020 REMP monitoring period. Approximately 1827 radionuclide analyses were performed on the environmental samples.

The REMP was conducted in accordance with DCPP Program Directive CY2, “Radiological Monitoring and Controls Program,” and RP1.ID11, “Environmental Radiological Monitoring Procedure.” This report was submitted per DCPP License Technical Specification 5.6.2.

The types of samples (matrix ID) collected for this monitoring period were as follows:

Air Particulate (AP)	Air Cartridge for I-131 monitoring (AC)		Air Carbon-14 (AC14)
Direct Radiation (TLD)	Milk (MK)	Meat (MT)	Vegetation (VG)
Drinking Water (DW)	Groundwater (GW)	Monitor Well (GW)	Surface Water (SW)
Aquatic Vegetation (AV)	Fish (FH)	Mussels (IM)	Sediment (SD)

The annual offsite radiological dose received by the general public from plant operations was less than one millirem (mrem) which is insignificant when compared to the 620 millirem average annual radiation exposure to people in the United States from natural and man-made background radiation sources (e.g. cosmic, terrestrial, radon, medical, etc).

The ambient direct radiation levels in the DCPP offsite environs did not change and were within the pre-operational background range. An evaluation of direct radiation measurements indicated all federal EPA 40CFR190 criteria were conservatively met.

Operation of DCPP continued to have no detectable offsite radiological impact. Samples analyzed from the offsite sampling stations continued to show no radiological contribution from plant operations.

The ambient onsite direct radiation levels within the DCPD plant site boundary near the Independent Spent Fuel Storage Installation (ISFSI) were elevated due to dry cask spent fuel storage. The remaining onsite REMP environmental TLD locations were not affected by the ISFSI due to ISFSI topographical elevation and placement within an onsite hillside which provided shielding to the rest of the site. An evaluation of direct radiation measurements and member-of-public occupancy times within the site boundary indicated all federal criteria for member-of-public dose limits (10CFR20.1301) were conservatively met.

Groundwater isotopic monitoring was conducted in accordance with the Nuclear Energy Institute (NEI) 07-07 Rev 1 Groundwater Protection Initiative (GPI). Concentrations of tritium were detected in two shallow monitoring wells (stations DY1 and OW1) near the power block. This tritium was evaluated and attributed to rain-washout of gaseous tritium exiting the plant vent system via an approved isotopic-effluents discharge path. No groundwater tritium was attributed to DCPD system leaks or spills. It should also be noted that studies of the DCPD site groundwater gradient indicated that any subsurface groundwater flow beneath the DCPD power block was not used as a source of drinking water. Due to topography and site characteristics, this groundwater gradient flow discharged into the Pacific Ocean which is approximately 100 yards from the power block.

An Old Steam Generator Storage Facility (OSGSF) long term storage vault was constructed within the DCPD site boundary in 2007 for storage of eight retired DCPD steam generators and two retired DCPD reactor heads. This OSGSF did not cause any changes to the ambient direct radiation levels within the DCPD environs during 2020. The OSGSF in-building sumps were inspected quarterly by REMP personnel.

The results of the 2020 REMP showed no unusual environmental isotopic findings from DCPD site operations. These results were compared to DCPD preoperational isotopic data and showed no unusual trends.

Diablo Canyon site operations had no significant impact on the health and safety of the public or the environment.



Southern PG&E property, Station 7C2



Diablo Canyon Power Plant and Morro Bay Rock in distance



Humpback whale near DCPP coastline



Montana de Oro State Park sand-spit looking north towards Morro Bay

TABLE OF CONTENTS

Executive Summary	Page 5
1.0 Introduction	13
2.0 Program Design	17
2.1 Monitoring Zones	19
2.2 Pathways Monitored	19
2.3 Descriptions of REMP Monitoring	
2.3.1 Direct Radiation	19
2.3.2 Airborne Radioactivity	20
2.3.3 Airborne Carbon-14	22
2.3.4 Waterborne	23
2.3.5 Marine Biological, Beach Sand, and Ocean Sediment	24
2.3.6 Food Crops	27
2.3.7 Milk	28
2.3.8 Meat	29
3.0 Radiological Data Summary of Tables	57
4.0 Analysis of Environmental Results	
4.1 REMP Sampling Variance / Deviations	75
4.2 Comparison of Achieved LLDs with Requirements	79
4.3 Comparison of Results against NRC Reporting Levels	81
4.4 Data Analysis by Media Type	
4.4.1 Direct Radiation	82
4.4.2 Airborne Radioactivity	92
4.4.3 Waterborne	93
4.4.4 Marine Biological, Beach Sand, and Ocean Sediment	94
4.4.5 Food Crops	97
4.4.6 Milk	98
4.4.7 Meat	99
5.0 Groundwater Monitoring	100
6.0 Old Steam Generator Storage Facility	106
7.0 Lab Cross Check Program	107
8.0 DCPD Annual Land Use Census	163
9.0 DCPD Wind Rose	171
10.0 References	177
Appendix A 2020 DCPD REMP Analysis Results	179

Photo credits: Josh Ernstrom, Tom Hook, John Lindsey, Steven Pengilley, Patty and Martin Wright

This page intentionally left blank.

LIST OF TABLES

<u>Table</u>	<u>Title</u>	<u>Page</u>
2.1	Radiological Environmental Monitoring Program	31
2.2	Distances and Directions to Environmental Monitoring Stations	37
2.3	Detection Capabilities, Environmental Lower Limit of Detection (LLD)	41
2.4	Reporting Levels for Radioactivity in Environmental Samples	43
3.1	Direct Radiation Summary Table	59
3.2	REMP Airborne Summary Table	60
3.3	Surface Water Summary Table	61
3.4	Drinking Water Summary Table	62
3.5	Mussel Summary Table	63
3.6	Fish Summary Table	64
3.7	Algae Summary Table	65
3.8	Kelp Summary Table	66
3.9	Vegetative Crops Summary Table	67
3.10	Milk Summary Table	68
3.11	Meat Summary Table	69
3.12	Ocean Sediment Summary Table	70
3.13	Beach Sand Summary Table	71
3.14	Groundwater Summary Table	72
3.15	Monitoring Well Summary Table	73
8	DCPP Land Use Census	163

LIST OF FIGURES

<u>Figure</u>	<u>Title</u>	
2.1	Diablo Canyon Off-site REMP Locations	45
2.2	Diablo Canyon On-site REMP Locations	49
2.3	Diablo Canyon REMP Stations	53
8	DCPP Land Use Census Map	169

This page intentionally left blank.




Great Egret wading on DCPD coastline kelp bed

1.0 INTRODUCTION

Natural background radiation is all around us, all the time. Naturally occurring sources of background radiation include cosmic radiation from space, terrestrial radiation from radioactive isotopes in the earth, naturally occurring radioactive isotopes in the food we eat, and naturally occurring isotopes in the air we breathe. The human body (each of us) contains natural radioactive isotopes such as radioactive carbon (C14) and radioactive potassium (K40). As a result, humans have been exposed to radiation since the dawn of man. Over the last 100 years, man has developed new radioactive materials and new machines that create additional sources of background radiation. These additional man-made background sources include radioactive materials used in medical diagnosis, medical treatment, consumer products, industrial processes, security devices, educational tools, research activities, warfare, and worker occupations. The National Council on Radiation Protection and Measurements (NCRP) estimates that the average person in the United States receives about 620 millirem (mrem) of radiation exposure each year from natural and man-made background radiation sources. For comparison, public exposure

from nuclear power plant radioactive effluents is less than 1 mrem. This < 1 mrem annual exposure is equivalent to approximately 1 to 2 hours of cosmic radiation exposure (0.5 mrem per hour) during a cross country airline flight.

The Radiological Environmental Monitoring Program (REMP) provides data on measurable levels of radiation and radioactive materials in the site environs. This program also evaluates the relationship between quantities of radioactive materials released from the plant and resultant doses to individuals from principal pathways of exposure. In this capacity, REMP provides a check on the effluent release program and dispersion modeling to ensure that concentrations in the environment radioactive effluents conform to the “As Low As Reasonably Achievable” (ALARA) design objectives of 10 CFR 50, Appendix I.

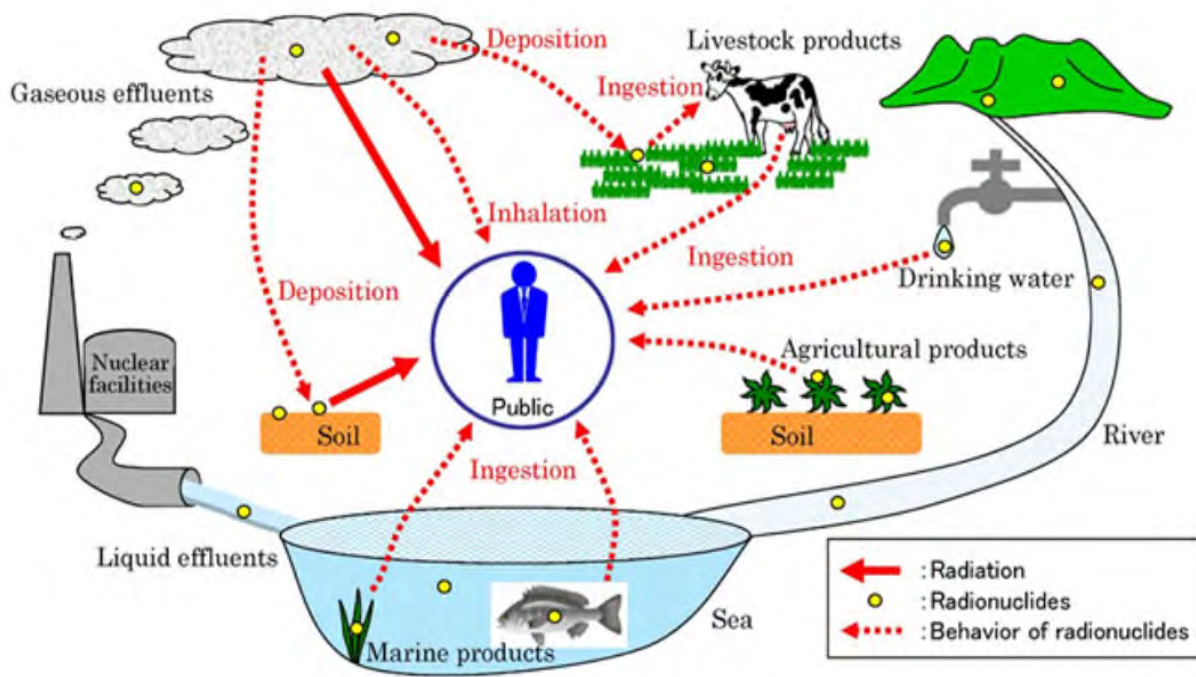

Monitored Potential Exposure Pathways

The Annual Radiological Environmental Operating Report (AREOR) provides summaries of the environmental data from exposure pathways, interpretations of the data, and analyses of trend results. Routinely monitored pathways include ingestion, inhalation, and direct radiation. Routes of exposure are based on site specific information such as receptor locations, receptor ages, distance and direction to release locations, and water usage around the plant. The site specific REMP program has been developed and maintained in accordance with NUREG-1301.

Diablo Canyon Power Plant (DCPP) consists of two Westinghouse pressurized water reactors (PWR) each producing approximately 1,100 megawatts electrical (MWe). Unit 1 began commercial operation on May 7, 1985 and Unit 2 began commercial operation on March 13, 1986.

Operation of DCPP continues to have no detectable radiological impact offsite. Samples analyzed from the offsite sampling stations continue to show no radiological contribution from plant operations.

This AREOR summarized the findings of the DCPP REMP and was organized as follows:

Section 2: Provided a description of the overall REMP design. Included was a summary of the requirements for REMP sampling, tables listing station routine sampling parameters, TLD monitoring locations, station directions and distances from the plant, and maps of station locations. Tables listing Lower Limit of Detection (LLD) requirements and NRC Reporting Levels were also included.

Section 3: Consisted of the summarized data as required by the Radiological Environmental Monitoring Program. The summaries were provided as specified by the NRC Branch Technical Position on Environmental Monitoring.

Section 4: Provided an interpretation and analysis of environmental sampling results along with deviations. Also included was environmental TLD data trending.

Section 5: Provided a summary of groundwater monitoring in accordance with the NEI 07-07 (Rev 1) Groundwater Protection Initiative.

Section 6: Provided a summary of OSGSF monitoring.

Section 7: Provided an overview of the lab interlaboratory cross-check program.

Section 8: Provided an overview of the current Land Use Census.

Section 9: Provided the one-year and five-year site wind-rose charts.

Section 10: Provided AREOR references.

Appendix A: Provided individual analytical sample results.

This report and previous DCPP AREOR's can be found on the NRC website at:

www.nrc.gov > Nuclear Reactors > Operating Reactors > Reactor Safety Information Topics > Radioactive Effluent and Environmental Reports > Diablo Canyon 1 & 2 > Environmental Reports

DCPP REMP sent replicate split samples of stations 7G1 vegetation (quarterly), 5F2 milk (monthly), 5S2 drinking water (monthly), DW1 drinking water (monthly), OUT seawater (monthly), DCM kelp (quarterly), DCM perch (quarterly), DCM rockfish (quarterly), and DCM ocean sediment (annually) to the California Department of Public Health - Radiologic Health Branch (CDPH-RHB) Laboratory as part of a California State split sampling program. These split samples were independently analyzed by the CDPH-RHB.

Other pathways independently monitored by the CDPH-RHB were quarterly direct radiation environmental TLD stations (MT1, 1A1, 1C1, 4D1, 5F3, 5S1, 7D1, 7C1, 7F1, and 8S2) and weekly air sampling particulate and I-131 (at stations 5F3 and 7D1).

The public can request access to these CDPH-RHB split sampling data results by emailing the CDPH at environmental.radiation@cdph.ca.gov.



South Ranch tide pool



DCPP coastline intertidal sea life

2.0 PROGRAM DESIGN

The Radiological Environmental Monitoring Program (REMP) for the Diablo Canyon Power Plant (DCPP) was designed with the following specific objectives in mind. These objectives continue to be in force, to varying degrees, throughout facility operation:

- To provide an early indication of the appearance or accumulation of any radioactive material in the environment caused by facility operation. Preoperational data was also used in this comparison.
- To provide assurance to regulatory agencies and the public that the station's environmental impact was known and within anticipated limits.
- To provide standby monitoring capability for rapid assessment of risk to the general public in the event of unanticipated or accidental releases of radioactive material from DCPP.

The environmental media selected were based on the critical dose pathways of the radionuclides from the environment to man. They included the following: direct radiation, air, water, fish, ocean sediment, and invertebrates. Supplemental samples such as algae, kelp, local agricultural crops, recreational beach sand, groundwater, meat, and milk were also collected. The sampling

locations were determined by land use, site meteorology, and local demographics. Guidance for this monitoring program was provided by the Radiological Assessment Branch Technical Position on Radiological Environmental Monitoring, Revision 1, November 1979 (NUREG-1301).

REMP samples were collected by DCPD REMP personnel and sent to General Engineering Labs (GEL) in Charleston, South Carolina for isotopic analysis.

Fish (except market fish) and ocean sediment samples were collected by contract divers of Tenera Environmental and given to DCPD REMP personnel for shipment to GEL.

Market fish samples were collected by local commercial fishermen and then purchased by DCPD REMP personnel in one of two local fish markets for shipment to GEL.

Environmental direct radiation analyses were conducted using thermo-luminescent dosimeters (TLD). Environmental TLD analysis was conducted by Mirion Technologies in Irvine California.

The detailed sampling requirements of the REMP were given in Table 2.1 of this report.

Data summary tables of REMP sampling for the period were shown in section 3 of this report.

Any deviations from the REMP sampling schedule or requirements were documented in section 4 of this report.

Direct dose (environmental TLD) results were shown in section 4 of this report.

Individual REMP sample isotopic analysis results were shown in Appendix A of this report.

Isotopic analysis results were classified as "detected" if the a-posteriori analysis result was greater than the Minimum Detectable Concentration (MDC) value for that specific analysis.

Detected concentrations ($>$ MDC) of nuclear power plant related isotopes have been highlighted with yellow-fill cell background in Appendix A for quick identification by the AREOR audience. Naturally occurring radioactive materials (NORM) were not highlighted (e.g. gross beta, Be-7, K-40, thorium, radium, radon, lead, etc).

2.1 MONITORING ZONES

The REMP was designed to allow comparison of levels of radioactivity in samples from the areas possibly influenced by DCPD to levels found in areas not influenced by the facility operations. Areas with the potential to be influenced by facility operations were called "indicator" stations. Areas with sufficient distance from the plant that were not likely to be influenced by facility operations were called "control" stations. The distinction between the two zones was based on distance and relative direction from the site. Analysis of survey data from the two zones aided in determination of site environmental influence. Analysis from the two zones assisted in differentiation between radioactive releases and seasonal variations in the natural environmental background radioactivity.

2.2 PATHWAYS MONITORED

Direct Radiation

Airborne Radioactivity

Waterborne Pathways

Marine Biological, Beach Sand, and Ocean Sediment

Food Crops

Milk

Meat

2.3 DESCRIPTIONS OF REMP MONITORING

2.3.1 Direct Radiation

Environmental TLD badge packets were distributed and collected from field stations by DCPD REMP personnel and then shipped to Mirion Technologies for processing on a quarterly basis. Control badges accompanied the field badges during shipment and deployment to measure any non-station dose received during transit time periods.

Direct ambient radiation was measured at 32 stations near DCPD and at 8 stations near the DCPD ISFSI using Panasonic UD814 TLD type badges. The TLD badges had valid element correction factors (ECF), were

calibrated using a NIST-traceable cesium-137 source, were annealed prior to placement, and were sealed in watertight packaging. Three TLD badges were placed at each station and each badge contained 3 calcium sulfate phosphors for a total of 9 calcium sulfate phosphors at each station. The 9 phosphors were analyzed and then averaged to provide a single quarterly station reading. Transit process exposure was subtracted, and that single reading was converted into a microrem per hour ($\mu\text{rem}/\text{hour}$) dose rate dependent on the in-field exposure time period. Then the $\mu\text{rem}/\text{hour}$ dose rate was converted into millirem (mrem) per standard (91 day) quarter. This millirem result was reported as "Standard Quarter TLD Results" for each station in the Section 4.4.1 Env TLD Analysis spreadsheets.

DCPP Environmental TLD "Standard Quarter TLD Results" were measurements of all environmental gamma radiation sources (cosmic, terrestrial, radon, man-made, etc) at each station during the in-field deployment period. These all-inclusive exposure values were used to create the trend graphs in Section 4.4.1.

ANSI/HPS N13.37-2014 methodology was used to report "Quarterly / Annual Investigation Level Dose" to quantify DCP facility related exposure.

2.3.2 Airborne Radioactivity

Air particulate and radioiodine sampling were performed weekly at six indicator stations: MT1, OS2, 1S1, 7D1, 8S1 and 8S2. Air particulate and radioiodine sampling were performed weekly at one control station: 5F1.

Constant-flow air samplers (F&J model DF-1) were used to draw air through paper filters to collect air particulates (station matrix AP = Air Particulate) and through triethylenediamine (TEDA) impregnated charcoal cartridges to collect radioiodine (station matrix AC = Air Cartridge). The air sampling flow rate was conducted at approximately 2.55 cubic meters per hour. The air sampling collection filters were located approximately

seven feet above the ground. The sample volumes were determined by F&J Corporation model DF-1 flow meters (corrected to standard temperature and pressure, STP) which were installed downstream of the sample filters. At the end of the weekly sampling period, the particulate filter and TEDA charcoal cartridge were collected. All necessary data regarding the air volume readings, flow rate, sampler time on / off, date of collection, and sampler station location were recorded and submitted to GEL along with the filter samples for isotopic analysis.

Approximately 72 hours after sampling (to allow for radon and thoron daughter decay), the particulate filter papers collected from the field were placed on individual planchets and counted for gross beta activity in a low background, thin window gas proportional counter.

Quarterly gamma spectroscopy isotopic analysis was performed on station composites of the approximate 13 filters to determine the activity concentration of gamma emitting isotopes. The quarterly composite sample time is reported at the midpoint of the quarter monitored.

Due to the short half-life of Iodine-131, each station weekly TEDA impregnated charcoal cartridge was counted for gamma spectroscopy isotopic analysis to determine the radioiodine concentration.



DCPP air sampling station equipment

2.3.3 Airborne Carbon-14

Supplemental air Carbon-14 (station matrix AC14) sampling was performed weekly at stations 0S2 (northwest sector), 8S1 (southeast sector), and 5F1 (control station in San Luis Obispo) throughout 2020.

GEL and DCP REMP worked together to develop a method for sampling environmental airborne inorganic C-14. Inorganic C-14 (as CO₂) is the primary exposure pathway to man via photosynthesis in plants. A constant flow air sampler was used to draw air through a solid phase carbon sensitive sorbent cartridge. The air sampler was set at a flow rate of 1 standard liter-per-minute. The air sample filter cartridge head was located approximately seven feet above the ground. At the end of the weekly sampling period, the filter cartridge was collected. All necessary data regarding the air volume, flow rate, sampler time on / off, date of collection, and sampler station location were recorded and submitted to GEL along with the sample filter for C-14 analysis. At GEL, a suitable portion of the solid sorbent material was processed through a method utilizing wet oxidation to remove volatile CO₂ from the media in a closed distillation system. Once removed from the media, C-14 as carbon dioxide was sparged through a dilute acid solution for trapping any tritium water present in the sample. After sparging through dilute acid, the CO₂ was trapped in a sorbent solution which was added to liquid scintillation cocktail and finally counted in a liquid scintillation counter. It should be noted that C-14 results in Appendix A are reported in microcuries (μCi) per cubic meter. This method met the following specifications:

- Validated to retain 99.9% of inorganic C-14 in air
- Validated at collection rates of approximately 1 liter-per-minute
- Validated for a one-week total collection capacity
- Accurate analysis of C-14 over a wide range of concentrations
- Methodology free from interference by other radionuclides
- Detection capability of approximately 8E-7 μCi per cubic meter

2.3.4 Waterborne

Water samples (drinking water, surface water, monitor wells, and groundwater) were collected at the frequencies shown in Table 2.1.

Ocean surface water samples were collected at Diablo Cove (station DCM), Rattlesnake Canyon (station 7C2), and at the plant Outfall (station OUT).

Drinking water samples were collected from Diablo Creek Weir (station 5S2), Diablo Creek Outlet (station WN2), Blanchard Spring (station 1A2), and from the DCPD drinking water system (station DW1). San Luis Obispo (SLO) city drinking water was also collected from a control station located at 4325 South Higuera Street, Offsite Emergency Lab (station OEL) in SLO.

Supplemental groundwater samples were collected from Water Well 02 (WW2) and DCSF96-1 (8S3).

Supplemental onsite monitoring well samples were collected from french-drain systems labeled Observation Well 01 (OW1) and Observation Well 02 (OW2). These shallow French drain well systems were in close proximity to the facility power block structures and within the protected area.

Two onsite monitoring wells were installed in December 2011 as part of the industry Groundwater Protection Initiative (GPI). Isotopic sampling of these wells was initiated in 2012. These two onsite wells were downgradient of the power block and located along the west side of the power block. These two monitoring wells were labeled Groundwater 1 (GW1) and Groundwater 2 (GW2).

After collection, the samples were securely sealed and labeled with sample type, station ID, date, time of collection, person performing the collection and sent to GEL for analysis.



REMP personnel conducting sea water sampling

2.3.5 Marine Biological, Beach Sand, and Ocean Sediment

The REMP required sampling of rockfish (genus *Sebastes*), perch (family Embiotocidae), intertidal mussels (genus *Mytilus*), and ocean sediment from indicator station DCM and control station 7C2.

All other marine samples collected were considered supplemental. These supplemental marine samples included the following: intertidal algae, intertidal mussels, kelp, rockfish, perch, beach sand, and market fish. The intertidal samples were collected by DCPD personnel during low tidal conditions. Kelp was collected quarterly by DCPD personnel from the offshore kelp bed near the site.

Beach sand was collected by DCPD personnel between the high tide and low tide boundaries at nearby recreational beaches.

In-shell mussels were sent to GEL where GEL personnel removed the meat & internal organs for analysis.

Quarterly samples of fish and annual samples of ocean sediments were collected from the site environs by contracted divers (TENERA Environmental). The Tenera divers fillet the fish and leave a small portion of skin for identification. Only edible portions (fish fillets) of the fish were analyzed.

Market Fish caught locally by commercial fishermen were purchased from two local fish markets (Avila Beach Pier-7D3 and Morro Bay-2F1).

All samples were subject to unavailability due to seasonal fluctuations or unfavorable sampling conditions.

The above samples were immediately sealed in plastic containers upon collection. The samples were labeled with sample type, station ID, date, time of collection, and the individual who performed collection. Most samples were routinely frozen (to prevent spoilage odor) before they were shipped to GEL for analysis.



REMP mussel sampling



2.3.6 Food Crops

The REMP required broadleaf food vegetation collected at the nearest off-site locations of the highest calculated annual average ground level D/Q (deposition coefficient) within 5 miles. There was no broadleaf food vegetation available that satisfied this requirement. Because these food products were unavailable, the DCPD REMP conducted additional weekly air sampling in the SE (station 8S2) and NNW (station 1S1) sectors.

Additional representative samples of food crops (in season) were collected monthly from supplemental stations: Cal Poly Farm (5F2), Kawaoka Farm in Arroyo Grande (7G1), Mello Farm (7C1) along the DCPD site access road, and quarterly from local gardens (3C1, 6C1, and 7E1).

The vegetation samples at 5F2, 7G1, 7C1, 3C1, and 7E1 were collected by DCPD personnel and immediately sealed in plastic bags. The quarterly garden vegetation sample at 6C1 was provided by the land occupant (due to difficulty of property access and occupant requested privacy) to DCPD personnel.

The samples were labeled with sample type, station ID, collection date, collection time, and the individual who performed collection. The samples were routinely frozen (to prevent spoilage odor) before they were shipped to GEL for analysis.



Vegetation sampling at Cal Poly Station 5F2

2.3.7 Milk

There were no animals within the 5-mile vicinity of the site utilized for milk consumption by humans. However, supplemental samples of cow milk were collected monthly from the Cal Poly Farm (5F2) which was approximately 13 miles from DCPD.

Three 1-gallon plastic containers of milk were collected each sampling period by DCPD personnel. Forty grams of sodium bisulfite preservative were added to each gallon of milk sample. The containers were sealed and shaken thoroughly to distribute the preservative. The containers were labeled with sample type, station ID, collection date, collection time, and the individual who performed collection. The samples were then express-shipped (due to the short half-life of I-131) to GEL for analysis.




Milk sampling at Cal Poly Station 5F2

2.3.8 Meat

A rancher routinely grazed (free range, grass fed) cattle within three miles of the site boundary between the northwest clockwise to east sectors. This livestock meat would then be offered at local farmer's markets and private distribution. Because it was possible for this vendor to provide an individual's sole-source of annual meat consumption, this meat sampling was included in the REMP. REMP personnel obtained commercially packaged meat samples directly from the vendor. Gamma spec and total strontium 89/90 analyses were performed on the meat. The REMP station codes were BCM, BGM, and BSM.

Control station free range, grass fed meat sampling was conducted of ranches outside the influence of DCP. This meat was purchased by REMP personnel from the Whole Foods Market in SLO. The control station meat consisted of Hearst Ranch ground beef which is located approximately 37 miles north of the DCP site. The REMP station code was CCM (Control Cow Meat).

The meat was packaged by the livestock owners or commercial processes. The unopened packages were then separated by species and placed into large over-pack zip-lock bags. Each bag was labeled with sample type, station ID, collection date, collection time, and the individual who performed the collection. The samples were then frozen and shipped to GEL for isotopic analysis.

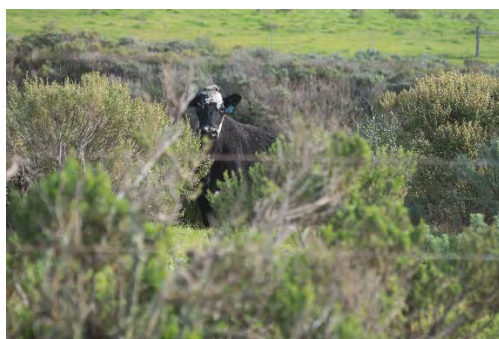

Cattle on southern DCP property near 7C2

This page intentionally left blank.

TABLE 2.1:
Radiological Environmental Monitoring Program

Exposure Pathway and/or Sample Type	Number of Representative Samples and Sample Locations ¹	Sampling Stations	Collection Frequency	Type of Analysis	Required or Supplemental
1. Direct Radiation ²	Thirty-two routine monitoring stations containing thermo luminescent dosimeters (TLDs) such that at least two (2) phosphors are present at each station, placed as follows:				
	An inner ring of stations, one in each terrestrial meteorological sector in the general area of the SITE BOUNDARY;	0S1, 0S2, WN1, 1S1, 2S1, 3S1, 4S1, 5S1, 6S1, 7S1, 8S1, 9S1, 8S2, 5S3, and MT1	Quarterly	Gamma Dose	Required
	An outer ring of stations, one in each terrestrial meteorological sector in the 2.5 to 14 km range from the site; and	0B1, 1A1, 1C1, 2D1, 3D1, 4C1, 5C1, 6D1, and 7C1	Quarterly	Gamma Dose	Required
	One or two areas to serve as control stations; and	2F2, 4D1, 5F1	Quarterly	Gamma Dose	Required
	The balance of the stations to be placed in special interest areas such as population centers, nearby residences, or schools.	5F3, 7D1, 7D2, 7F1, and 7G2	Quarterly	Gamma Dose	Required
	A minimum of four stations around the ISFSI	IS1, IS2, IS3, IS4, IS5, IS6, IS7, IS8	Quarterly	Gamma Dose	Required
2. Airborne Radioiodine	Samples from ≥ 4 stations:				
	Three samples from close to the three SITE BOUNDARY locations (0S2, 8S1, & MT1) in different sectors.	0S2, 8S1, and MT1	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	I-131 analysis	Required
	One sample from the vicinity of a community having the highest calculated annual average ground level D/Q.	7D1	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	I-131 analysis	Required
	If food products are unavailable, additional air sampling will be done in the NNW (station 1S1) and SE (Station 8S2) sectors.	1S1 & 8S2	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	I-131 analysis	Required
	One sample from a control location.	5F1	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	I-131 analysis	Required

Table 2.1 (continued)

Exposure Pathway and/or Sample Type	Number of Representative Samples and Sample Locations ¹	Sampling Stations	Collection Frequency	Type of Analysis	Required or Supplemental
3. Airborne Particulate	Samples from ≥ 4 stations:				
	Three samples from close to the three SITE BOUNDARY locations (0S2, 8S1, & MT1) in different sectors.	0S2, 8S1, and MT1	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	Weekly gross beta radioactivity analysis following filter change ³ . Quarterly gamma isotopic analysis ⁴ of composite consisting of approx. 12 filters (by location).	Required
	One sample from the vicinity of a community having the highest calculated annual average ground level D/Q.	7D1	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	Weekly gross beta radioactivity analysis following filter change ³ . Quarterly gamma isotopic analysis ⁴ of composite consisting of approx. 12 filters (by location).	Required
	If food products are unavailable, additional air sampling will be done in the NNW (station 1S1) and SE (Station 8S2) sectors.	1S1 & 8S2	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	Weekly gross beta radioactivity analysis following filter change ³ . Quarterly gamma isotopic analysis ⁴ of composite consisting of approx. 12 filters (by location).	Required
	One sample from a control location.	5F1	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	Weekly gross beta radioactivity analysis following filter change ³ . Quarterly gamma isotopic analysis ⁴ of composite consisting of approx. 12 filters (by location).	Required
4. Airborne Carbon-14					
	Samples from 3 stations: One sample from each of the NW and SE sectors close to the site (0S2 and 8S1). One sample used as a control station (5F1).	0S2, 8S1 5F1 (control)	Continuous sampler operation with sample collection weekly, or more frequently if required by dust loading.	C-14 analysis	Supplemental

Table 2.1 (continued)

Exposure Pathway and/or Sample Type	Number of Representative Samples and Sample Locations ¹	Sampling Stations	Collection Frequency	Type of Analysis	Required or Supplemental
5. Waterborne					
a. Surface Ocean Water	One sample from the plant Outfall, Diablo Cove, and an area not influenced by plant discharge.	OUT, DCM, and 7C2	Monthly (grab sample)	Gamma isotopic ⁴ and tritium analysis.	Required
	One sample from the plant Outfall, Diablo Cove, and an area not influenced by plant discharge.	OUT, DCM, and 7C2	Quarterly (grab sample)	Gross Beta, Total Sr 89/90, Fe-55, and Ni-63	Supplemental
b. Drinking Water	One sample from the plant drinking water, one sample from Diablo Creek (upstream of plant), and one control sample.	DW1 and 5S2 OEL (control)	Monthly (grab sample)	Gamma isotopic ⁴ , I-131, and tritium analysis.	Required
	One sample from the plant drinking water, one sample from Diablo Creek (upstream of plant), and one control sample.	DW1 and 5S2 OEL (control)	Quarterly (grab sample)	Gross Beta, Total Sr 89/90, Fe-55, and Ni-63	Supplemental
	One sample from Diablo Creek (downstream of plant) and one sample from Blanchard Spring.	WN2 and 1A2	Quarterly (grab sample)	Gamma isotopic ⁴ , tritium, I-131, gross beta, Total Sr 89/90, Fe-55, and Ni-63	Supplemental
c. Groundwater	One sample from wells located under or downgradient from the plant power block.	OW1, OW2, GW1 and GW2	Quarterly (grab sample, when available)	Gamma isotopic ⁴ , tritium, gross beta, Total Sr 89/90, Fe-55, and Ni-63	Supplemental
	One sample from a well located outside the plant power block (control sample).	WW2, 8S3	Quarterly (grab sample, when available)	Gamma isotopic ⁴ , tritium, gross beta, Total Sr 89/90, Fe-55, and Ni-63	Supplemental
d. Sediment	One sample of offshore ocean sediment from Diablo Cove and Rattlesnake Canyon.	DCM and 7C2	Annual (grab sample)	Gamma isotopic ⁴	Required
	One sample of offshore ocean sediment from Diablo Cove and Rattlesnake Canyon.	DCM and 7C2	Annual (grab sample)	Total Sr 89/90, Fe-55, and Ni-63	Supplemental
	One sample from each of five local recreational beaches.	AVA, MDO, PMO, CYA, and CBA	Semi- Annual (grab sample)	Gamma isotopic ⁴ , Total Sr 89/90, Fe-55, and Ni-63	Supplemental
e. Marine Flora	One sample of kelp	DCM, PON, POS, and 7C2	Quarterly (when available)	Gamma isotopic ⁴	Supplemental
	One sample of intertidal algae	DCM and 7C2	Quarterly (when available)	Gamma isotopic ⁴	Supplemental

Table 2.1 (continued)

Exposure Pathway and/or Sample Type	Number of Representative Samples and Sample Locations ¹	Sampling Stations	Collection Frequency	Type of Analysis	Required or Supplemental
6. Ingestion					
a. Milk	Samples from milking animals in three locations within 5 km distance having the highest dose potential. If there are none, then one sample from milking animals in each of three areas between 5 to 8 km distance where doses are calculated to be greater than 1 mrem per year. One sample from milking animals at a control location 15 to 30 km distant and in the least prevalent wind direction. NOTE: The sample (5F2) should be taken monthly even if there are no indicator samples available.	5F2	Semimonthly when animals are on pasture; monthly at other times.	Gamma isotopic ⁴ and I-131 analysis.	Supplemental
b. Fish and Invertebrates	One sample of rock fish (family Sebastes) and one sample of perch (family Embiotocidae)	DCM and 7C2	Quarterly (grab sample)	Gamma isotopic ⁴ analysis on edible portions of each sample.	Required
	One sample of rock fish (family Sebastes) and one sample of perch (family Embiotocidae)	PON and POS	Quarterly (grab sample)	Gamma isotopic ⁴ analysis on edible portions of each sample.	Supplemental
	One sample of mussel (family Mytilus)	DCM and 7C2	Quarterly (grab sample)	Gamma isotopic ⁴ analysis on edible portions of each sample.	Required
	One sample of mussel (family Mytilus)	PON	Annual (grab sample)	Gamma isotopic ⁴ analysis on edible portions of each sample.	Supplemental
	One sample of mussel (family Mytilus)	POS	Quarterly (grab sample)	Gamma isotopic ⁴ analysis on edible portions of each sample.	Supplemental
	One sample of locally harvested market fish.	7D3 OR 2F1 (should alternate between locations)	Quarterly (grab sample)	Gamma isotopic ⁴ analysis on edible portions of each sample.	Supplemental

Table 2.1 (continued)

Exposure Pathway and/or Sample Type	Number of Representative Samples and Sample Locations ¹	Sampling Stations	Collection Frequency	Type of Analysis	Required or Supplemental
c. Broadleaf Vegetation ⁵	Three samples of broadleaf vegetation grown nearest off-site locations of highest calculated annual average ground level D/Q <u>IF</u> milk sampling is not performed.		Monthly (when available)	Gamma isotopic ⁴ analysis (that includes I-131) on edible portion.	Required (see notation #5)
	One sample of each of the similar broadleaf vegetation grown 15 to 30 km distant in the least prevalent wind direction <u>IF</u> milk sampling is not performed.		Monthly (when available)	Gamma isotopic ⁴ analysis (that includes I-131) on edible portion.	Required (see notation #5)
d. Vegetative Crops	One sample of broadleaf vegetation or vegetables or fruit	5F2, 7C1, and 7G1	Monthly (when available)	Gamma isotopic ⁴ analysis on edible portion.	Supplemental
	One sample of broadleaf vegetation or vegetables or fruit.	3C1, 6C1, 7E1	Quarterly (as provided by land owner)	Gamma isotopic ⁴ analysis on edible portion.	Supplemental
e. Meat sample	One sample of each species (cow, goat, sheep, deer, or pig) of edible meat portion slaughtered for personal consumption (not mass market).	BCM, BGM, BSM, JDM, JPM, ACM, ADM, APM, CCM	Quarterly (as available and provided by land owners within 8 km of plant site)	Gamma isotopic ⁴ analysis, and Total Sr 89/90 on edible portion.	Supplemental

Table Notations

1. Deviations are permitted from the required sampling schedule if specimens are unobtainable due to circumstances such as hazardous conditions, seasonal unavailability, malfunction of automatic sampling equipment and other legitimate reasons. If specimens are unobtainable due to sampling equipment malfunction, effort shall be made to complete corrective action prior to the end of the next sampling period. All deviations from the sampling schedule shall be documented in the Annual Radiological Environmental Operating Report. It is recognized that, at times, it may not be possible or practicable to continue to obtain samples of the media of choice at the most desired location or time. In these instances, suitable specific alternative media and locations may be chosen for the particular pathway in question and appropriate substitutions made within 30 days in the Radiological Environmental Monitoring Program, and submitted in the next Annual Radioactive Effluent Release Report, including a revised figure(s) and table for the ERMP reflecting the new location(s) with supporting information identifying the cause of the unavailability of samples for that pathway and justifying the selection of the new location(s) for obtaining samples.
2. For the purposes of this table, a thermoluminescent dosimeter (TLD) is considered to be one phosphor. There are normally three calcium sulfate phosphors in an environmental TLD BADGE. Film badges shall not be used as dosimeters for measuring direct radiation.
3. Airborne particulate sample filters shall be analyzed for gross beta radioactivity 24 hours or more after sampling to allow for radon and thoron daughter decay. If gross beta activity in air particulate samples is greater than 10 times the yearly mean of control samples, gamma isotopic analysis shall be performed on the individual samples.
4. Gamma isotopic analysis means the identification and quantification of gamma-emitting radionuclides that may be attributable to the effluents from the facility.
5. If broadleaf vegetation food products are unavailable, additional air sampling as specified in Table 2.1, Parts 2 & 3 will be done in the NNW (station 1S1) and SE (Station 8S2) sectors.
6. The Branch Technical Position (Nov 79) states, "Any location from which milk can no longer be obtained may be dropped from the surveillance program after notifying the NRC in writing that they are no longer obtainable at that location". Although milk sampling performed at 5F2 is outside the 5-mile radius and is supplemental to the REMP, this notification should take place if 5F2 milk sampling ceases.

This page intentionally left blank.

TABLE 2.2**Distances and Directions to Environmental Monitoring Stations**

Station Code^(a)	Station Name	Radial Direction** (True Heading) Degrees	Radial Distance** From Plant	
			km	Miles
0S1	Exclusion Fence-Northwest Corner	320	0.16	0.1
0S2	North Gate	320	0.8	0.5
1S1	Wastewater Pond	330	0.64	0.4
2S1	Back Road-300 m North of Plant	0	0.32	0.2
3S1	Road NW of 230 kV Switchyard	23	0.64	0.4
4S1	Back Road Between Switchyards	43	0.8	0.5
5S1	500 kV Switchyard	58	0.64	0.4
5S2	Diablo Creek Weir	65	0.96	0.6
5S3	Microwave Tower Road	70	1.02	0.7
6S1	Microwave Tower	94	0.8	0.5
7S1	Overlook Road	112	0.48	0.3
8S1	Target Range	125	0.8	0.5
8S2	Southwest Site Boundary	128	1.76	1.1
8S3	DCSF 96-1 (monitor well)	140	0.64	0.4
9S1	South Cove	167	0.64	0.4
MT1	Meteorological Tower	185	0.32	0.2
DCM	Diablo Cove Marine	249	0.44	0.27
WN1	Northwest Guard Shack	290	0.32	0.2
WN2	Diablo Creek Outlet	283	0.25	0.15
1A1	Crowbar Canyon	327	2.56	1.6
1A2	Blanchard Spring	331	2.4	1.5
0B1	Point Buchon	325	5.76	3.6
1C1	Montana de Oro Campground	336	7.52	4.7
3C1	Ranch Vegetation	20	7.16	4.5
4C1	Clark Valley Gravel Pit	45	9.28	5.8
5C1	Junction Prefumo/See Canyon Roads	64	7.52	4.7
6C1	Household Garden	98	7.24	4.5
7C1	Pecho Creek Ruins (Mello Farm)	120	6.56	4.1
7C2	Rattlesnake Canyon	124	7.52	4.7
2D1	Sunnyside School	10	11.04	6.9
3D1	Clark Valley	24	9.92	6.2
4D1	Los Osos Valley Road	36	12.16	7.6
6D1	Junction See/Davis Canyon Roads	89	13.4	8.3
7D1	Avila Gate	118	10.56	6.6
7D2	Avila Beach	110	12.16	7.6
7D3	Avila Pier	120	11.0	6.9
7E1	Avila Valley Barn	103	13.94	8.66
2F1	Morro Bay (Commercial Landing)	0	17.44	10.9
2F2	Morro Bay Power Plant	358	17.9	11.2
5F1	SLO OEL	79	16.41	10.2
5F2	Cal Poly Farm	60	20.16	12.6
5F3	SLO County Health Department	70	20.32	12.7

Table 2.2 (continued)

Station Code ^(a)	Station Name	Radial Direction** (True Heading) Degrees	Radial Distance** From Plant	
			km	Miles
7F1	Shell Beach	110	17.28	10.8
7G1	Arroyo Grande (Kawaoka Farm)	115	26.88	16.8
7G2	Oceano Substation	118	27.68	17.3
AVA	Avila Beach (near pier)	109	11.75	7.3
CBA	Cambria Moonstone Beach	330	45.86	28.5
CYA	Cayucos Beach (near pier)	350	26.87	16.7
DY1	Drywell 115'	77	0.041	0.026
DW1	Drinking Water (Plant Potable Water Sys)	161	0.59	0.37
GW1	Groundwater Monitoring Well 1	271	0.15	0.09
GW2	Groundwater Monitoring Well 2	195	0.21	0.13
IS1-IS8	ISFSI	59	0.38	0.23
MDO	Montana de Oro (Spooners Cove)	336	7.56	4.7
OW1	Observation Well 01	336	0.07	0.046
OW2	Observation Well 02	157	0.07	0.045
OEL	Offsite Emergency Lab	79	16.41	10.2
OUT	Plant Outfall	229	0.15	0.01
PMO	Pismo Beach (near pier)	113	20.76	12.9
PON	Pacific Ocean North of Diablo Cove	287	0.56	0.35
POS	Pacific Ocean South of Diablo Cove	176	0.7	0.44
WW2	Water Well 02	70	1.02	0.63
BCM	Blanchard (Farm) Cow Meat	320	1.94	1.2
BGM	Blanchard (Farm) Goat Meat	320	1.94	1.2
BSM	Blanchard (Farm) Sheep Meat	320	1.94	1.2
CCM	Control Cow Meat	328	59.5	37
JDM	Johe (Property) Deer Meat	21	5.24	3.26

*The reference point used is the dome of Unit 1 containment.

*Station Code (XYZ):

X - First number (0-9) represents the radial sector in which the station is located:

- | | |
|---------------------|---------------------|
| 0 - Northwest | 5 - East-northeast |
| 1 - North-northwest | 6 - East |
| 2 - North | 7 - East-southeast |
| 3 - North-northeast | 8 - Southeast |
| 4 - Northeast | 9 - South-southeast |

Y - Letter (S, A-H) represents the distance from the plant:

- S - On-site
- A - 0-2 miles from plant (but off-site)
- B - 2-4 miles from plant
- C - 4-6 miles from plant
- D - 6-8 miles from plant
- E - 8-10 miles from plant
- F - 10-15 miles from plant
- G - 15-20 miles from plant
- H - Greater than 20 miles from plant

Z - Second number represents the station number within the zone.

Table 2.2 (continued)

*Station Codes exceptions:

The following stations do not follow the coding system:

- Diablo Cove Marine (DCM)
- Meteorological Tower (MT1)
- Northwest guard shack (WN1)
- Diablo Creek outlet (WN2)
- Pacific Ocean North (PON)
- Pacific Ocean South (POS)
- Offsite Emergency Lab (OEL)
- Plant outfall (OUT)
- Drinking water (DW1)
- Water Well 02 (WW2)
- Observation Well 01 (OW1)
- Observation Well 02 (OW2)
- Drywell 115 (DY1)
- Avila Beach (AVA)
- Groundwater Monitoring Well 1 (GW1)
- Groundwater Monitoring Well 2 (GW2)
- Montana de Oro (MDO)
- Pismo Beach (PMO)
- Cayucos Beach (CYA)
- Cambria Moonstone Beach (CBA)
- Blanchard Cow Meat (BCM)
- Blanchard Goat Meat (BGM)
- Blanchard Sheep Meat (BSM)
- Control Cow Meat (CCM)
- Johe Deer Meat (JDM)
- Johe Pig Meat (JPM)
- Andre Cow Meat (ACM)
- Andre Deer Meat (ADM)
- Andre Pig Meat (APM)
- ISFSI TLDs (IS1 – IS8)

This page intentionally left blank.

TABLE 2.3:
Detection Capabilities for Environmental Sample Analysis^(a)
Lower Limits of Detection (LLD)^(b)

Analysis	Water (pCi/L)	Airborne Particulate or Gases (pCi/m³)	Fish (pCi/kg, wet)	Milk (pCi/L)	Food Products (pCi/kg, wet)	Soil/Sediment (pCi/kg, dry)^c
Gross beta	4	0.01				
H-3	400 ^c					11,000
Mn-54	15		130			150
Fe-59	30		260			300
Co-58	15		130			150
Co-60	15		130			150
Zn-65	30		260			300
Zr-95	30					300
Nb-95	15					150
I-131	1 ^d	0.07		1	60	
Cs-134	15	0.05	130	15	60	150
Cs-137	18	0.06	150	18	80	180
Ba-140	60			60		600
La-140	15			15		150

Table Notations

- a) The gamma emitters and corresponding LLD values listed are derived from standard ODCM guidance for environmental samples as found in NUREG-1301, Table 4.12-1. This list does not mean that only these nuclides are to be considered. Other peaks that are identifiable, together with those of the above nuclides, are also analyzed and reported in the Annual Radiological Environmental Operating Report.
- b) The LLD is defined, for purposes of these specifications, as the a-priori analysis "process" that will yield a net count, above system background, that will be detected with 95 percent probability with only 5 percent probability of falsely concluding that a blank observation represents a "real" signal for the above concentration of radioactive material in a sample.
- c) If no drinking water pathway exists, a value of 3,000 pCi/L may be used for tritium. All groundwater wells should use the 400 pCi/L tritium value regardless of drinking water use.
- d) The LLD value of 1 pCi/L for I-131 is applicable only to sources used as drinking water. If no drinking water pathway exists, a value of 15 pCi/L may be used for I-131.
- e) The gamma emitters LLD values listed for soil/sediment are derived from the Cs-134/137 10:1 ratio established in the environmental LLDs in NUREG-1301, Table 4.12-1.

TABLE 2.3 (Continued)

Table Notations

For a particular measurement system, which may include radiochemical separation:

$$\text{LLD} = \frac{4.66S_b}{E \times V \times 2.22 \times Y \times \exp(-\lambda t)}$$

Where:

- LLD = the "a priori" the lower limit of detection as defined above (as pCi per unit mass or volume)
- S_b = the standard deviation of the background counting rate or of the counting rate of a blank sample as appropriate (as counts per minute)
- E = the counting efficiency (as counts per transformation)
- V = the sample size (in units of mass or volume)
- 2.22 = the number of transformations per minute per pico-curie
- Y = the fractional radiochemical yield (when applicable)
- λ = the radioactive decay constant for the particular radionuclide
- t = the elapsed time between sample collection (or end of the sample collection period) and time of counting

The value of S_b used in the calculation of the LLD for a detection system will be based on the actual observed variance of the background counting rate or of the counting rate of the blank samples (as appropriate) rather than on an unverified theoretically predicted variance. In calculating the LLD for a radionuclide determined by gamma-ray spectrometry, the background will include the typical contributions of other radionuclides normally present in the samples (e.g., potassium-40 in milk samples).

Analyses will be performed in such a manner that the stated LLDs will be achieved under routine conditions. Occasionally background fluctuations, unavoidably small sample sizes, the presence of interfering nuclides, or other uncontrollable circumstances may render these LLDs unachievable. In such cases, the contributing factors will be identified and described in the Annual Environmental Radiological Operating Report.

Typical values of E, V, Y and t should be used in the calculation. It should be recognized that the LLD is defined as a-priori (before the fact) limit representing the capability of a measurement system and not as a-posteriori (after the fact) limit for a particular measurement.

TABLE 2.4: Reporting Levels for Radioactivity Concentrations in Environmental Samples

Analysis	Water (pCi/L)	Airborne Particulate or Gases (pCi/m³)	Fish (pCi/kg, wet)	Milk (pCi/L)	Food Products (pCi/kg, wet)
H-3	* 20,000				
Mn-54	1,000		30,000		
Fe-59	400		10,000		
Co-58	1,000		30,000		
Co-60	300		10,000		
Zn-65	300		20,000		
Zr-Nb-95	400				
I-131	** 2	0.9		3	100
Cs-134	30	10	1,000	60	1,000
Cs-137	50	20	2,000	70	2,000
Ba-La-140	200			300	


* For drinking water samples. This is the 40 CFR 141 value. If no drinking water pathway exists, a value of 30,000 pCi/L may be used.

** If no drinking water pathway exists, a value of 20 pCi/L may be used

This page intentionally left blank.

Figure 2.1- Diablo Canyon Off-site Stations


This page intentionally left blank.

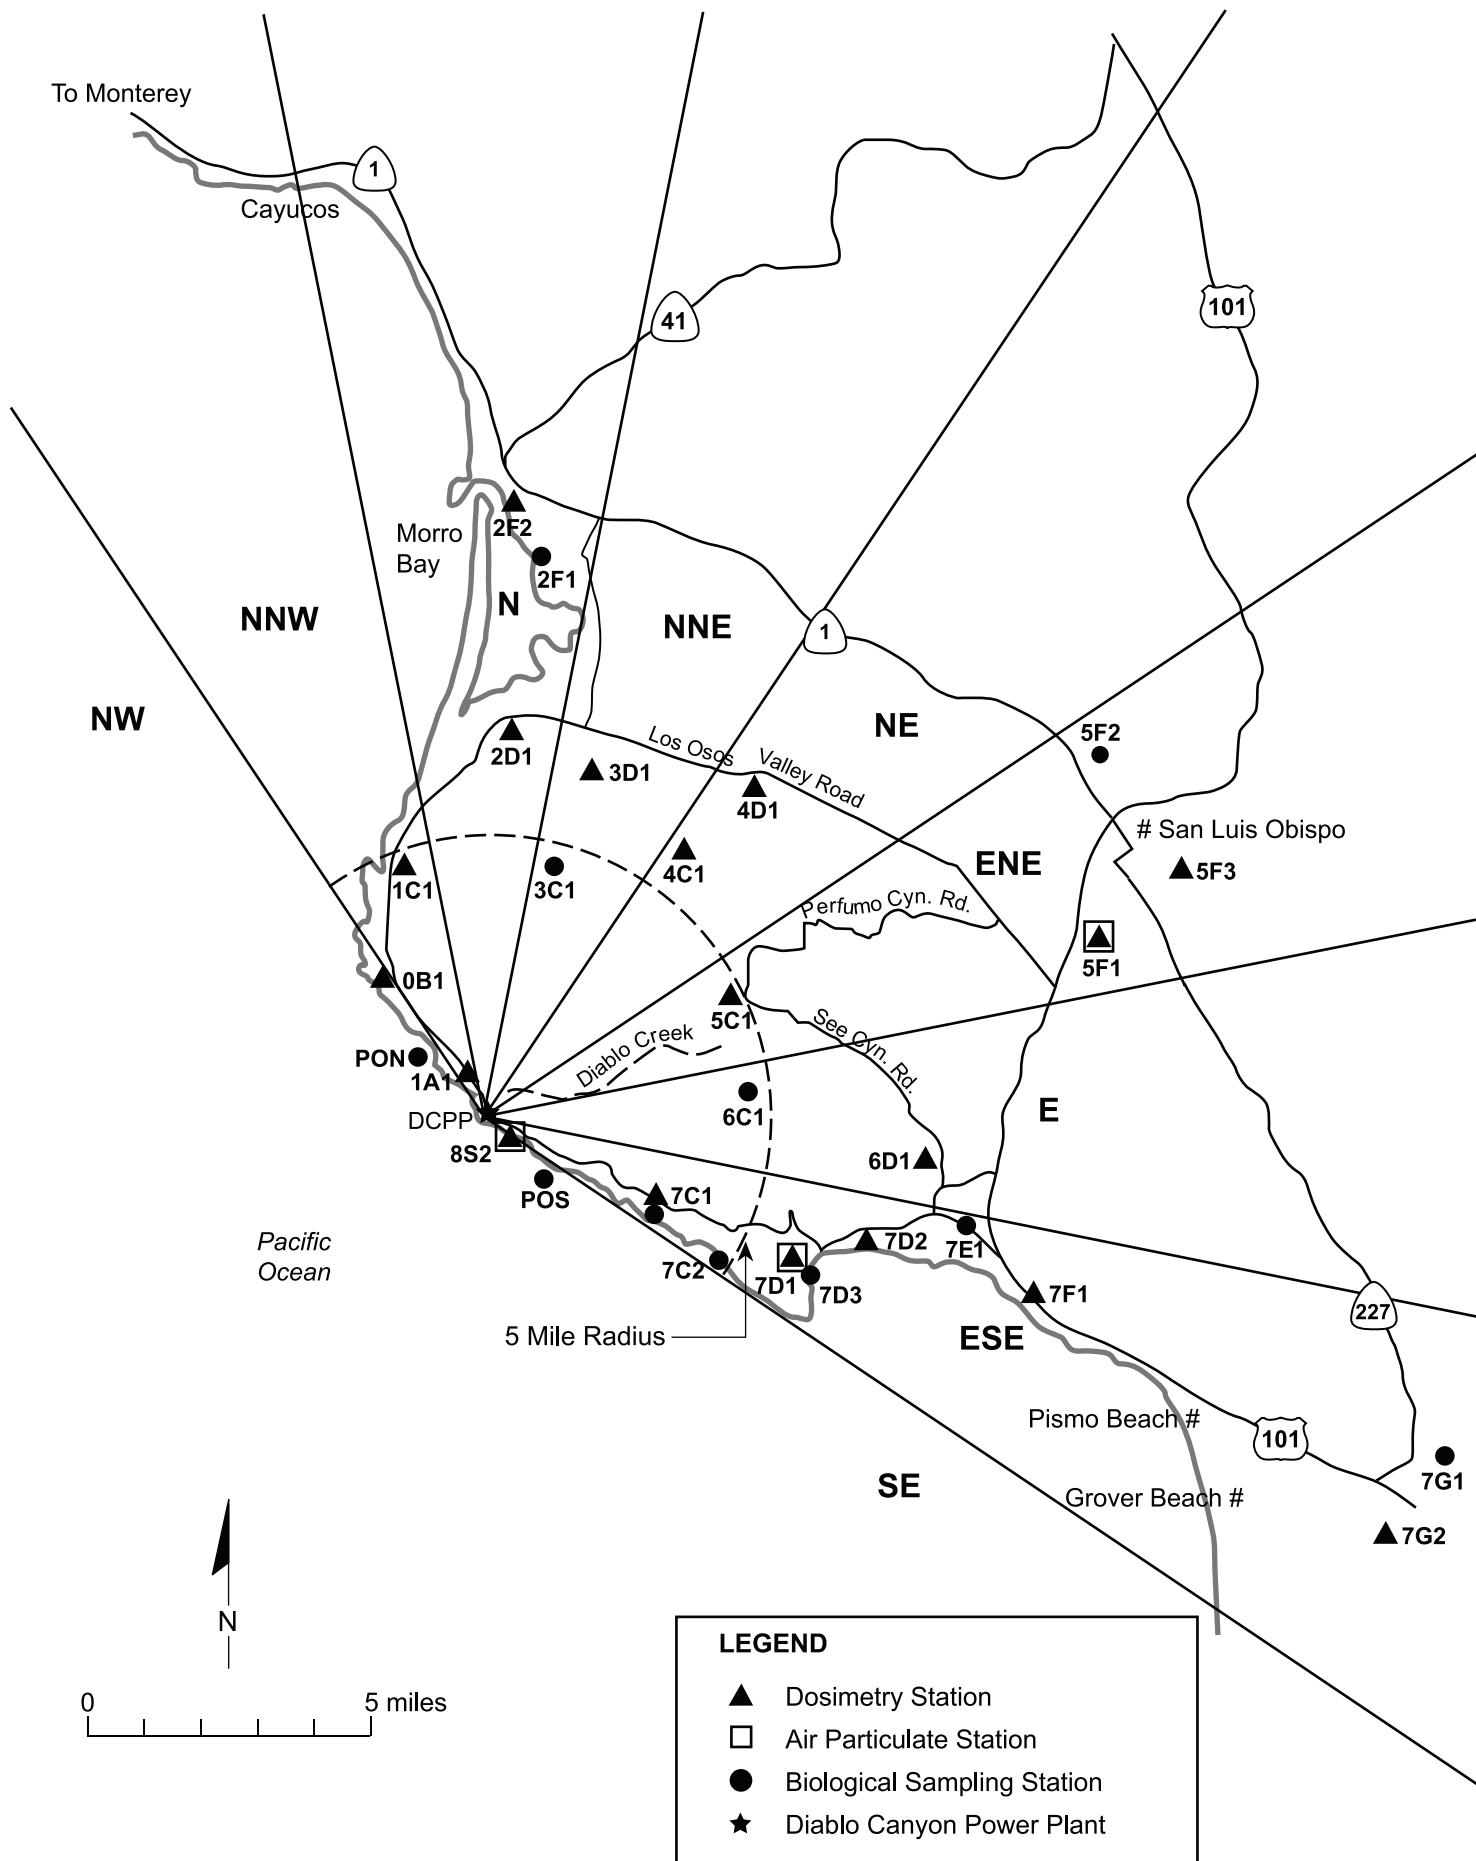

This page intentionally left blank.

Figure 2.2- Diablo Canyon On-site Stations

This page intentionally left blank.

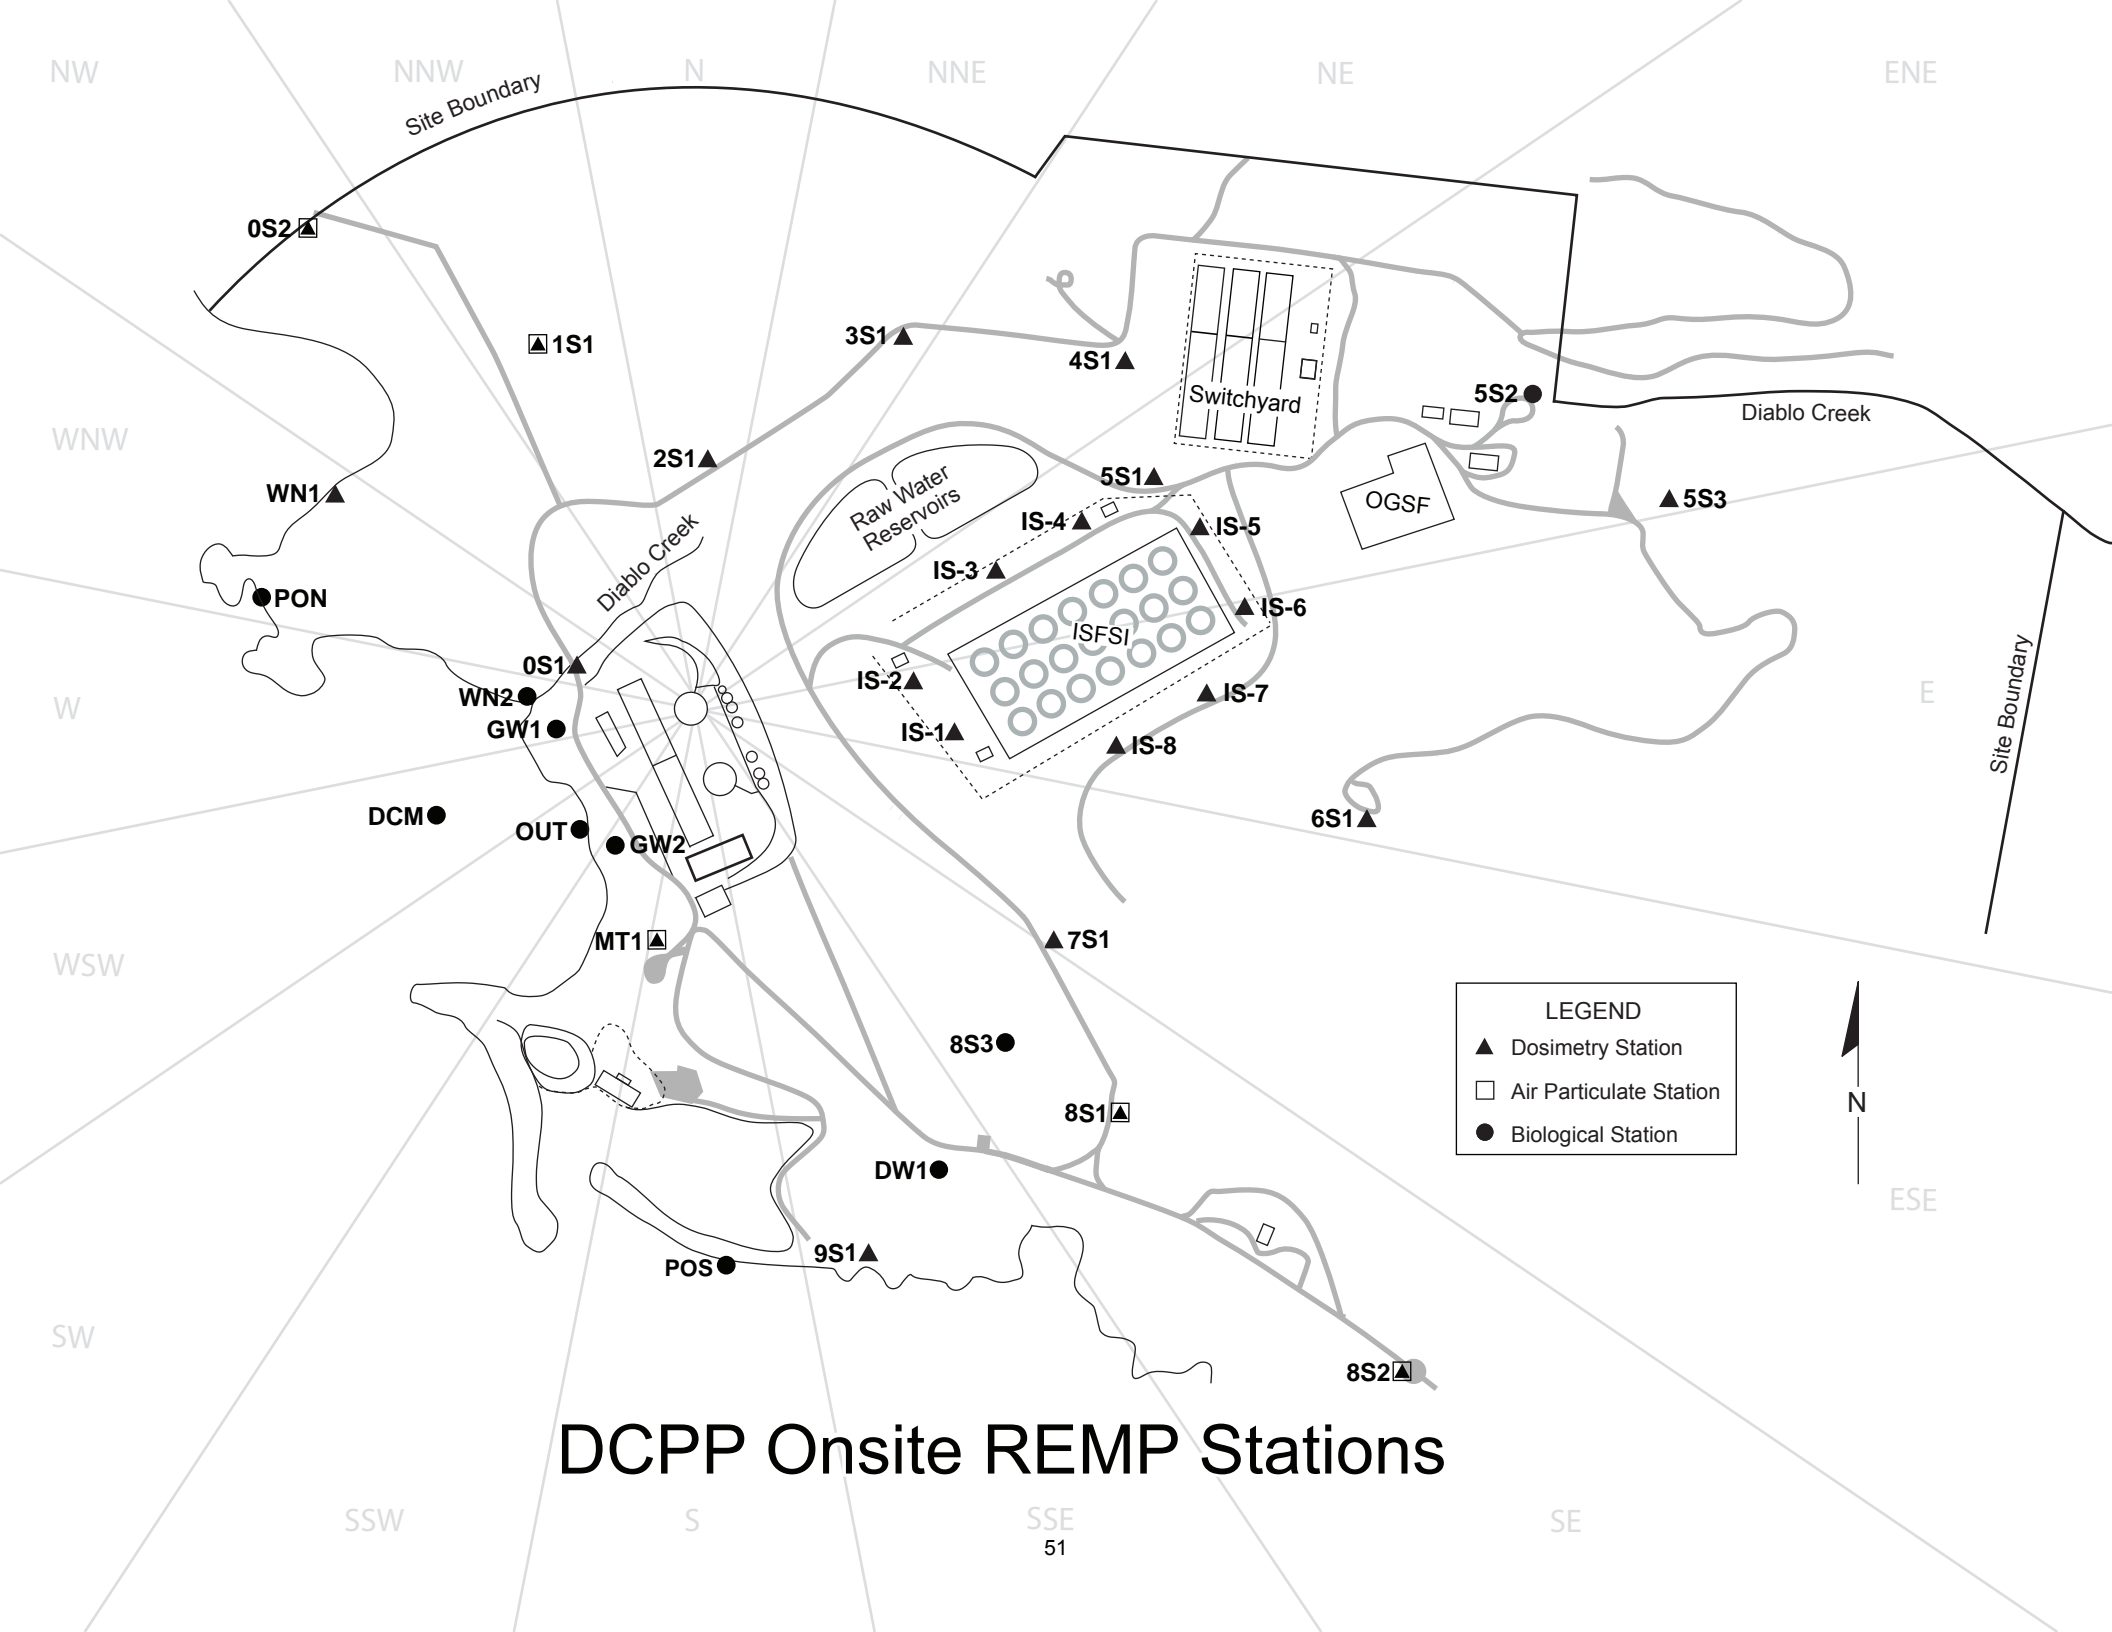


DCPD Onsite REMP Stations

This page intentionally left blank.

Figure 2.3- Diablo Canyon Station Locations

This page intentionally left blank.

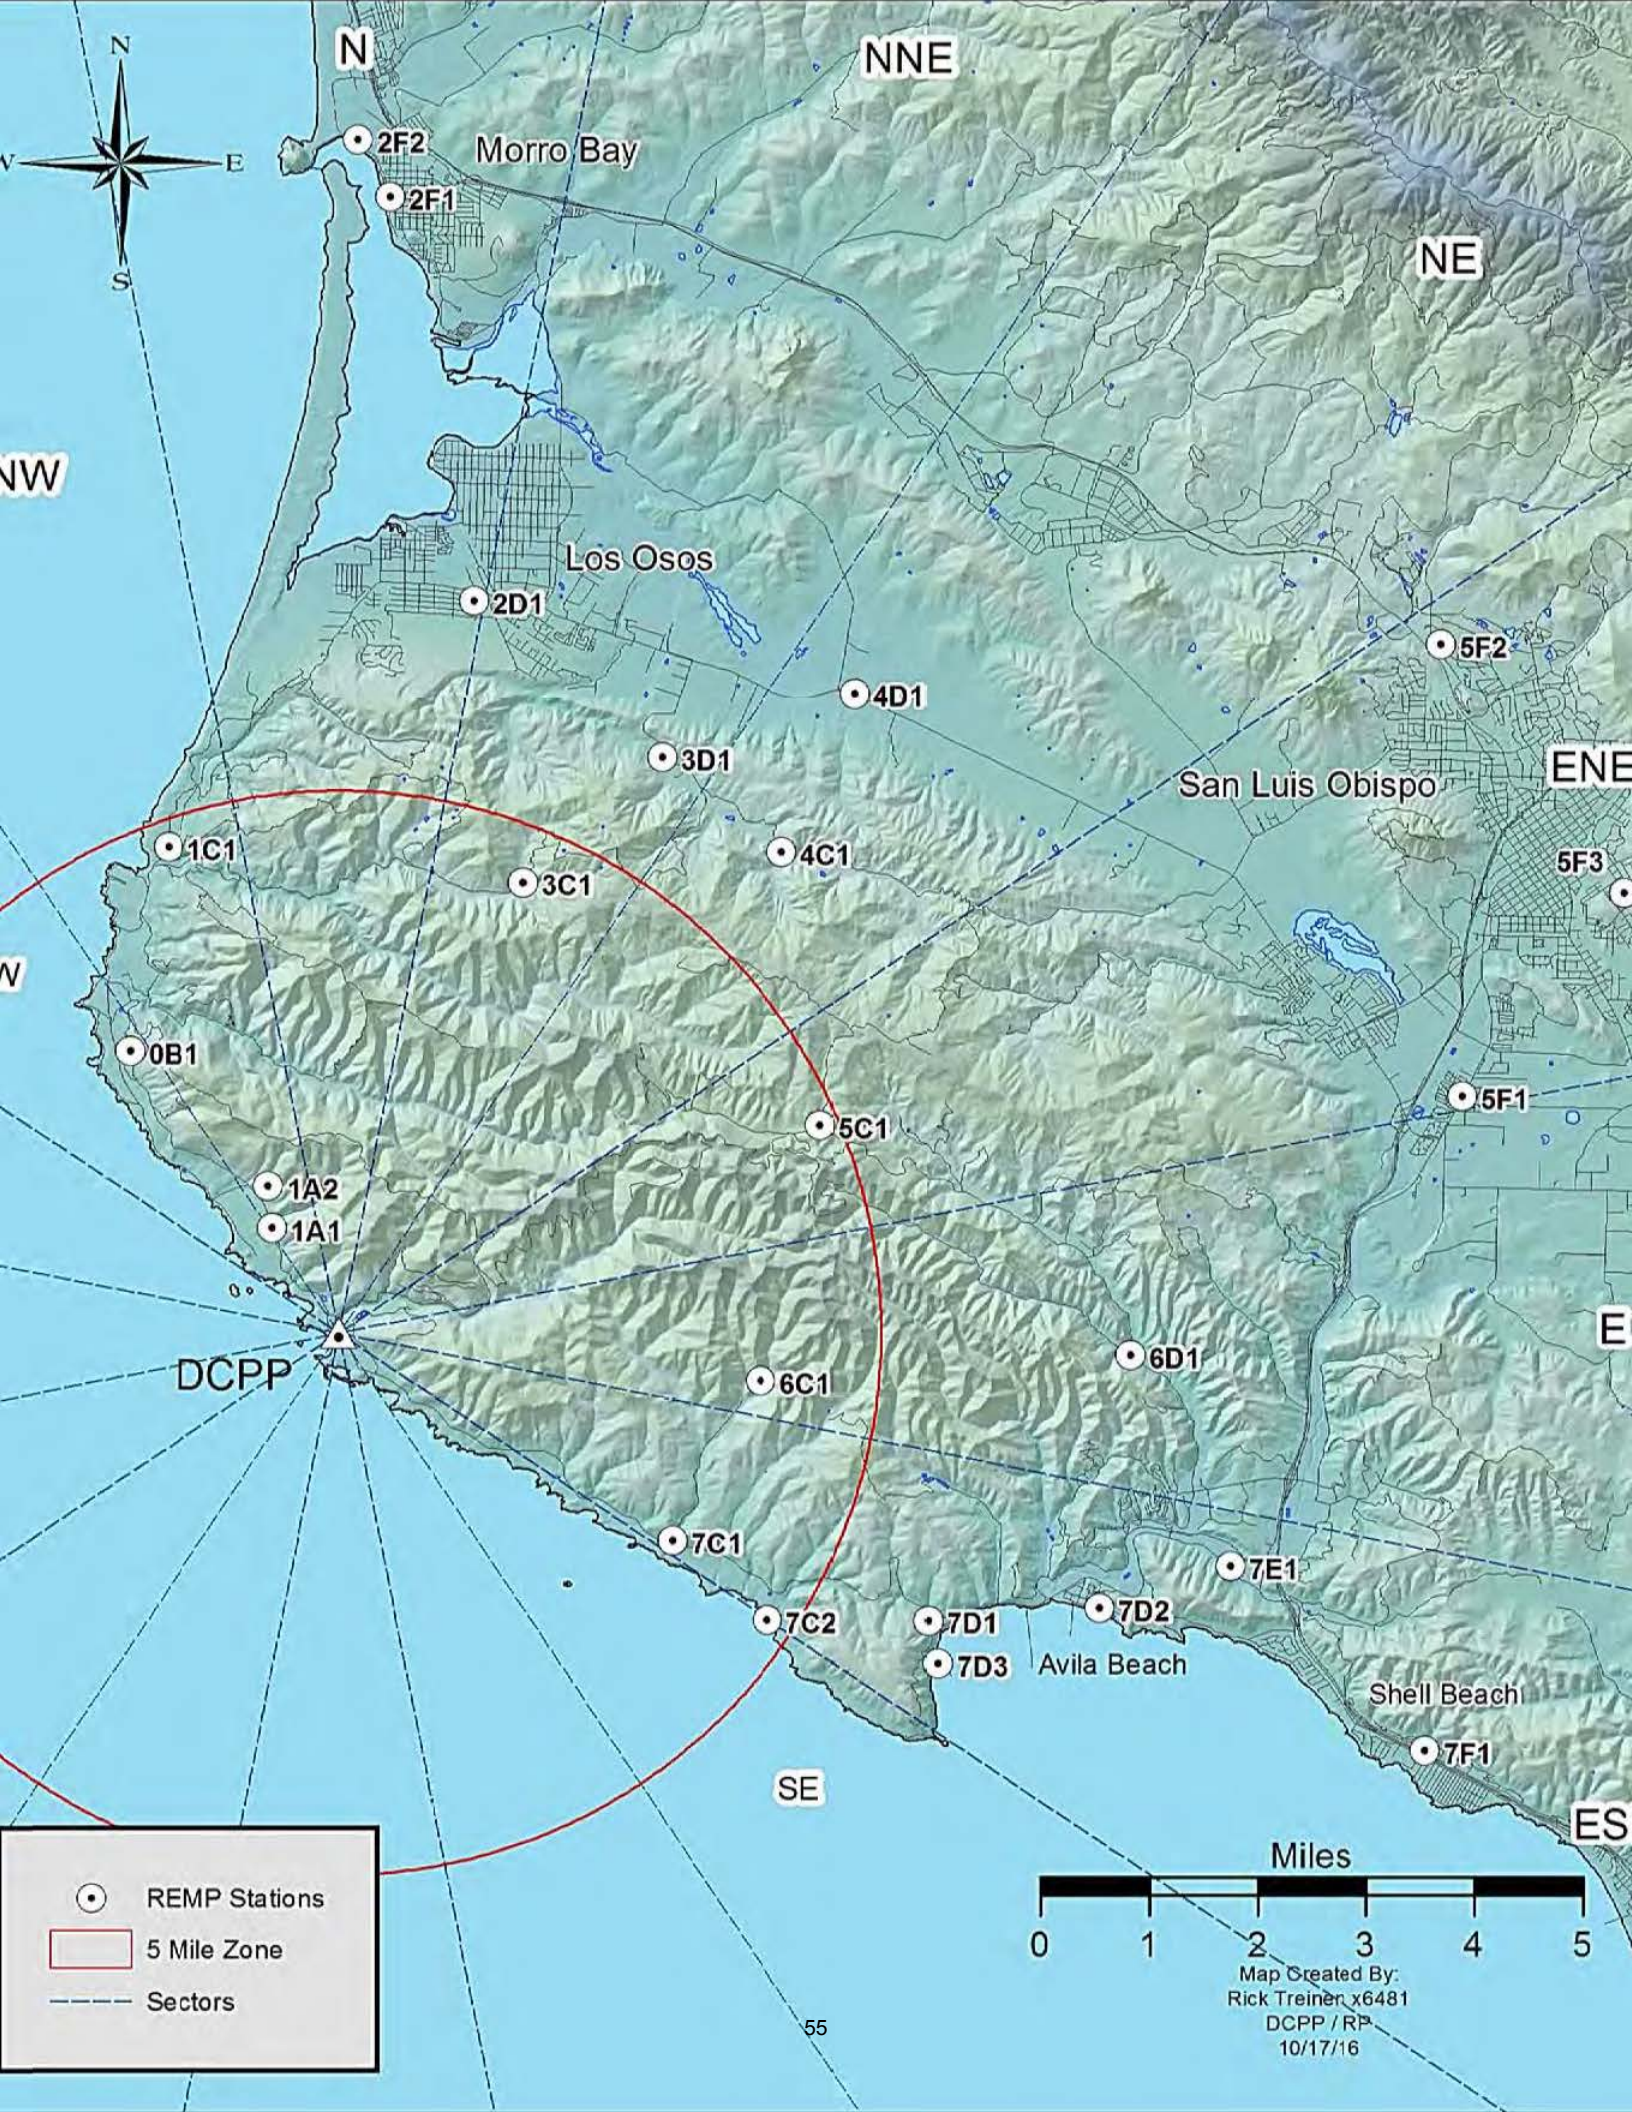

DCPP

Morro Bay

Los Osos

San Luis Obispo

Avila Beach

Shell Beach

● REMP Stations

5 Mile Zone

--- Sectors

Miles

0 1 2 3 4 5

Map Created By:
Rick Treinen x6481
DCPP / RP
10/17/16

This page intentionally left blank.



Pacific Harbor Seal at Diablo Canyon intake cove

3.0 RADIOLOGICAL DATA-SUMMARY OF TABLES

This section summarized the analytical results of the environmental samples collected during the monitoring period. The results were presented in a format similar to that prescribed in the NRC's Radiological Assessment Branch Technical Position on Environmental Monitoring, Revision 1, November 1979 (NUREG-1301).

Each table was nuclide specific and the total numbers of analyses for that radionuclide were provided. Additionally, the number of measurements which exceeded the NRC Notification Reporting Levels found in Table 2.4 of this report were provided. The first column listed the matrix or pathway sampled during the period. The second column listed the nuclides analyzed and number of samples performed. The third column provided the a-priori Lower Limit of Detection (LLD) for radionuclides that have detection capability requirements as specified in Table 2.3 of this report. The fourth, fifth, and sixth columns contained the mean and range of results for locations. The seventh column contained the number of NRC Reportable occurrences for the location

pathway. Occasionally, the required LLD may not be met. An example of this occurrence might be due to hold times between sampling and analysis. Such cases, if any, were addressed in Section 4.2 of this report.

The a-posteriori Minimum Detectable Concentration (MDC) listed for each analysis in Appendix A was used as the detection evaluation point for each sample collected. Therefore, a sample was considered to yield a "detectable measurement" when the "result" concentration exceeded the associated MDC value for that analysis. The MDC was calculated by the laboratory with each analysis (a-posteriori) and incorporated conditions observed at the laboratory during the analysis. Note that the a-posteriori MDC equation used by the environmental lab was the same as the a-priori Lower Limit of Detection (LLD) equation specified in NUREG-1301.

Additionally, the tables provided the mean of all detectable sample results analyzed for the specified radionuclide/ media type, the range, and the total number of detectable samples of all the samples counted:

- The mean value consisted of the average of detectable concentrations
- The lowest and highest detected concentration values were listed as the range
- The number of detectable measurements and the total number of measurements were listed. For example, (4/20) would indicate that 4 of the 20 samples collected (for that sample type and that radionuclide) contained detectable radioactivity.

The radionuclides reported in this section represented those that:

- had an LLD requirement in Table 2.3, or a Reporting Level listed in Table 2.4
- were of specific interest for any other reason

The radionuclides routinely analyzed and reported (if detected) within a gamma spectroscopy analysis were:

Ac-228, Ag-108m, Ag-110m, Am-241, Ba-140, Be-7, Bi-212, Bi-214, Ce-141, Ce-144, Co-57, Co-58, Co-60, Cr-51, Cs-134, Cs-137, Fe-59, I-131, K-40, La-140, Mn-54, Nb-95, Pb-210, Pb-212, Pb-214, Ra-224, Ra-226, Ru-103, Ru-106, Sb-124, Sb-125, Th-234, Tl-208, Zn-65, and Zr-95.

Table 3.1
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)		All Indicator Locations Mean ^(B) Range ^(B)		All Control Locations Mean ^(B) Range ^(B)		Number of Reportable Occurrences
Direct Radiation (mrem/std quarter)									
	5S1, 0.4 mi, 58°								
	See Table 2.2								
	2F2, 4D1, 5F1								
	Env TLD Badges ^(C) (384)	6 mrem/qtr	Not Detected (0 / 12)		Not Detected (0 / 348)		Not Detected (0 / 36)		0
	IS4, 0.3 mi, 65°								
	IS1 - IS8								
ISFSI TLDs ^(D) (96)	6 mrem/qtr	79.5	72.0 - 87.2 (12 / 12)	34.4	15.1 - 87.2 (60 / 96)				0

Table Notation:

(A) Sensitivity of TLD system using ANSI/HPS N13.37-2014 methodology

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means 10 samples out of 12 collected showed exposure above historical background and the TLD sensitivity.

(C) 96 Env TLD badges are distributed quarterly at 32 locations (29 indicator stations and 3 control stations). Each quarter there are 3 badges exposed per station.

(D) 24 ISFSI Env TLD badges distributed quarterly at 8 locations surrounding the ISFSI protected area and within the site boundary. Each quarter 3 badges exposed per station.

Table 3.2
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)		All Indicator Locations Mean ^(B) Range ^(B)		All Control Locations Mean ^(B) Range ^(B)		Number of Reportable Occurrences
Airborne (pCi/meter ³)	Iodine (364)		7D1, 6.6 mi, 118 °		0S2, 1S1, 7D1, 8S1, 8S2, MT1		5F1, 10.2 mi, 79°		0
	I-131	0.07		None Detected (0/52)		None Detected (0/312)		None Detected (0/52)	
Airborne (pCi/meter ³)	Air Particulates (364)		7D1, 6.6 mi, 118°		0S2, 1S1, 7D1, 8S1, 8S2, MT1		5F1, 10.2 mi, 79°		0
	Gross Beta	0.01	2.02E-2	6.39E-3 to 7.80E-2 (52/52)	1.86E-2	2.49E-3 to 7.99E-2 (312/312)	2.25E-2	4.58E-3 to 8.04E-2 (52/52)	
	Gamma Isotopic ^(C) (28)		7D1, 6.6 mi, 118°		0S2, 1S1, 7D1, 8S1, 8S2, MT1		5F1, 10.2 mi, 79°		0
	Cs-134	0.05		None Detected (0/4)		None Detected (0/24)		None Detected (0/4)	
	Cs-137	0.06		None Detected (0/4)		None Detected (0/24)		None Detected (0/4)	
Airborne (uCi/meter ³)	Air Carbon-14 (156)		8S1, 0.5 mi, 125°		0S2, 8S1		5F1, 10.2 mi, 79°		0
	Carbon-14	1.00E-06	2.72E-7	2.59E-7 to 2.86E-7 (3/52)	2.56E-7	2.07E-7 to 2.86E-7 (4/104)		None Detected (0/52)	

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means 10 samples out of 12 collected showed activity.

(C) These gamma isotopic samples are quarterly composite samples of all weekly particulate air sample filters. Approximately 13 particulate filters for each REMP location.

Plant related radionuclides, not naturally occurring isotopes.

Table 3.3
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	All Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Surface Water (pCi/Liter)	Gamma Isotopic (41)		DCM, 0.27 mi, 249°	DCM, OUT	7C2, 4.7 mi, 124°	
	Mn-54	15	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Fe-59	30	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Co-58	15	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Co-60	15	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Zn-65	30	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Zr-95	30	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Nb-95	15	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	I-131	15	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Cs-134	15	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Cs-137	18	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Ba-140	60	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	La 140	15	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Additional Analysis					
	Gross Beta (41)	100	329 200-441 (14/14)	324 200-441 (27/27)	314 151-523 (14/14)	0
	Fe-55 (41)	200	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Ni-63 (41)	50	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Tritium H-3 (41)	400	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0
	Total Sr 89/90 (41)	10	none detected (0 / 14)	none detected (0 / 27)	none detected (0 / 14)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Table 3.4
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	All Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Drinking Water (pCi/Liter)	Gamma Isotopic (48)		1A2, 1.5 mi, 331°	1A2, 5S2, DW1, WN2	OEL, 10.2 mi, 79°	
	Mn-54	15	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Fe-59	30	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Co-58	15	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Co-60	15	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Zn-65	30	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Zr-95	30	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Nb-95	15	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	I-131	1	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Cs-134	15	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Cs-137	18	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Ba-140	60	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	La 140	15	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Additional Analysis					
	Gross Beta (48)	4	5.79 4.17-7.40 (2/4)	3.61 1.97-7.40 (14/36)	1.87 .872-2.56 (4/12)	0
	Fe-55 (48)	200	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Ni-63 (48)	50	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Tritium H-3 (48)	400	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0
	Total Sr 89/90 (48)	2	none detected (0 / 4)	none detected (0 / 36)	none detected (0 / 12)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means 10 samples out of 12 collected showed activity.

Table 3.5
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County, State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	All Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Mussels (pCi/kg)			PON, 0.35 mi, 287°	DCM, PON, POS	7C2, 4.7 mi, 124°	
	Gamma Isotopic (13)					
	Mn-54	130	none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Fe-59	260	none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Co-58	130	none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Co-60	130	none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Zn-65	260	none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Zr-95		none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Nb-95		none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	I-131		none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Cs-134	130	none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Cs-137	150	none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	Ba-140		none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0
	La-140		none detected (0 / 1)	none detected (0 / 9)	none detected (0 / 4)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Table 3.6
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County, State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	All Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Fish (pCi/kg)			PON, 0.35 mi, 287°	2F1, 7D3, DCM, PON, POS	7C2, 4.7 mi, 124°	
	Gamma Isotopic (40)					
	Mn-54	130	none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	Fe-59	260	none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	Co-58	130	none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	Co-60	130	none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	Zn-65	260	none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	Zr-95		none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	Nb-95		none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	I-131		none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	Cs-134	130	none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	Cs-137	150	none detected (0 / 4)	12.40 8.41 - 14.7 (3/32)	none detected (0 / 8)	0
	Ba-140		none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0
	La-140		none detected (0 / 4)	none detected (0 / 32)	none detected (0 / 8)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Table 3.7
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County, State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Algae* (pCi/kg)	Gamma Isotopic (4)		DCM, 0.27 miles, 249°	DCM, 0.27 miles, 249°	7C2, 4.7 miles, 124°	
	Mn-54		no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Fe-59		no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Co-58	80	no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Co-60	80	no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Zn-65		no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Zr-95		no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Nb-95		no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	I-131		no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Cs-134	60	no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Cs-137	80	no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	Ba-140		no algae available to sample	no algae available to sample	none detected (0 / 4)	0
	La-140		no algae available to sample	no algae available to sample	none detected (0 / 4)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

* These samples are supplemental samples.

Table 3.8
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County, State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	All Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Kelp* (pCi/kg)	Gamma Isotopic (20)		DCM, 0.27 mi, 249°	DCM, PON, POS	7C2, 4.7 mi, 124°	
			Mn-54	none detected (0 / 5)	none detected (0 / 5)	0
			Fe-59	none detected (0 / 5)	none detected (0 / 5)	0
			Co-58 80	none detected (0 / 5)	none detected (0 / 5)	0
			Co-60 80	none detected (0 / 5)	none detected (0 / 5)	0
			Zn-65	none detected (0 / 5)	none detected (0 / 5)	0
			Zr-95	none detected (0 / 5)	none detected (0 / 5)	0
			Nb-95	none detected (0 / 5)	none detected (0 / 5)	0
			I-131	none detected (0 / 5)	none detected (0 / 5)	0
			Cs-134 60	none detected (0 / 5)	none detected (0 / 5)	0
			Cs-137 80	none detected (0 / 5)	none detected (0 / 5)	0
			Ba-140	none detected (0 / 5)	none detected (0 / 5)	0
			La-140	none detected (0 / 5)	none detected (0 / 5)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

* These samples are supplemental samples.

Table 3.9
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	All Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Vegetative Crops (pCi/kg)	Gamma Isotopic (54)					
			6C1, 4.5 mi, 98°	3C1, 5F2, 6C1, 7C1, 7E1	7G1, 16.8 mi, 115°	
	Mn-54		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Fe-59		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Co-58		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Co-60		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Zn-65		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Zr-95		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Nb-95		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	I-131	60	None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Cs-134	60	None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Cs-137	80	None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	Ba-140		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0
	La-140		None Detected (0 / 4)	None Detected (0 / 42)	None Detected (0 / 12)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Table 3.10
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Milk (pCi/Liter)	5F2, 12.6 mi, 60°					
	Iodine extraction (14)					
	I-131	1	Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Gamma Isotopic (14)					
	Mn-54		Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Fe-59		Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Co-58		Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Co-60		Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Zn-65		Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Zr-95		Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Nb-95		Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Cs-134	15	Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Cs-137	18	Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Ba-140	60	Not Applicable	Not Applicable	None Detected (0 / 14)	0
	La-140	15	Not Applicable	Not Applicable	None Detected (0 / 14)	0
	Total Sr 89/90 (14)	2	Not Applicable	Not Applicable	None Detected (0 / 14)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Table 3.11
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	All Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Meat (pCi/kg)	<div> <div>Gamma Isotopic (8)</div> <div> <div>BCM, 1.5 mi, 331°</div> <div>BCM</div> <div>CCM, 37 mi, 328°</div> </div> </div>					
	Mn-54		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Fe-59		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Co-58		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Co-60		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Zn-65		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Zr-95		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Nb-95		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	I-131	60	none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Cs-134	60	none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Cs-137	80	none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Ba-140		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	La-140		none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0
	Total Sr 89/90 (8)	500	none detected (0 / 5)	none detected (0 / 5)	none detected (0 / 3)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis,
e.g. (10/12) means 10 samples out of 12 collected showed activity.

Table 3.12
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County, State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	Indicator Locations Mean ^(B) Range ^(B)	Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Ocean Sediment (pCi/kg dry)	Gamma Isotopic (2)					
			DCM, 0.27 mi, 249°	DCM	7C2, 4.7 mi, 124°	
	Mn-54	150	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Fe-59	300	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Co-58	150	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Co-60	150	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Zn-65	300	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Zr-95	300	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Nb-95	150	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	I-131		none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Cs-134	150	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Cs-137	180	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Ba-140	600	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	La-140	150	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Fe-55 (2)	20,000	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Ni-63 (2)	4,000	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0
	Total Sr 89/90 (2)	2,000	none detected (0 / 1)	none detected (0 / 1)	none detected (0 / 1)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Table 3.13
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)	All Indicator Locations Mean ^(B) Range ^(B)	All Control Locations Mean ^(B) Range ^(B)	Number of Reportable Occurrences
Beach Sand (pCi/kg dry)			MDO, 4.7 mi, 336°	AVA, MDO, PMO, CYA	CBA, 28.5 mi, 330°	
Gamma Isotopic (10)						
	Mn-54	150	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Fe-59	300	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Co-58	150	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Co-60	150	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Zn-65	300	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Zr-95	300	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Nb-95	150	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	I-131		none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Cs-134	150	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Cs-137	180	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Ba-140	600	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	La-140	150	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Fe-55 (10)	20,000	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Ni-63 (10)	4,000	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0
	Total Sr 89/90 (10)	2,000	none detected (0 / 2)	none detected (0 / 8)	none detected (0 / 2)	0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Table 3.14
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)		All Indicator Locations Mean ^(B) Range ^(B)		All Control Locations Mean ^(B) Range ^(B)		Number of Reportable Occurrences
Groundwater (pCi/Liter)	Gamma Isotopic (8)		8S3, 0.4 mi, 140°		8S3, 0.4 mi, 140°		WW2, 0.63 mi, 70°		
	Mn-54	15	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Fe-59	30	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Co-58	15	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Co-60	15	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Zn-65	30	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Zr-95	30	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Nb-95	15	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	I-131	15	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Cs-134	15	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Cs-137	18	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Ba-140	60	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	La-140	15	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Gross Beta (8)	4	5.35	2.92 - 8.07 (4 / 4)	5.35	2.92- 8.07 (4 / 4)	3.8	2.43- 4.91 (3 / 4)	0
	Fe-55 (8)	200	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Ni-63 (8)	50	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Total Sr 89/90 (8)	2	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0
	Tritium H-3 (8)	400	none detected (0 / 4)		none detected (0 / 4)		none detected (0 / 4)		0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Table 3.15
Environmental Radiological Monitoring Program Summary
Report Period: 1/1/20 - 12/31/20

Name of Facility: Diablo Canyon Power Plant

Location of Facility: San Luis Obispo, CA
(County , State)

Medium or Pathway Sampled (Unit of Measure)	Type and Total Number of Analyses Performed	Lower Limit of Detection ^(A) (LLD)	Indicator with Highest Annual Mean Name, Distance, and Direction Mean ^(B) Range ^(B)		All Indicator Locations Mean ^(B) Range ^(B)		All Control Locations Mean ^(B) Range ^(B)		Number of Reportable Occurrences
Monitoring Wells (pCi/Liter)	Gamma Isotopic (16)		GW1, 0.09 mi, 271°		GW1, GW2, OW1, OW2		WW2, 0.63 mi, 70°		
	Mn-54	15	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Fe-59	30	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Co-58	15	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Co-60	15	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Zn-65	30	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Zr-95	30	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Nb-95	15	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	I-131	15	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Cs-134	15	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Cs-137	18	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Ba-140	60	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	La-140	15	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Gross Beta (16)	4	28.1	28.1- 28.1 (1/4)	15.8	5.84 - 28.1 (8/12)	3.8	2.43 - 4.91 (3/4)	0
	Fe-55 (16)	200	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Ni-63 (16)	50	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Total Sr 89/90 (16)	2	none detected (0 / 4)		none detected (0 / 12)		none detected (0 / 4)		0
	Tritium H-3 (16)	400	none detected (0 / 4)		498	412 - 586 (4/12)	none detected (0 / 4)		0

Table Notation:

(A) Unless specified, all required LLDs were met in accordance with Table 2.3

(B) Mean and range based upon detectable measurements only. Fraction of detectable measurements at specified locations is indicated in parenthesis e.g. , (10/12) means
10 samples out of 12 collected showed activity.

Note : Monitoring well tritium concentrations due to rain washout of an approved airborne discharge pathway from plant vents.

This page intentionally left blank.



Northern DCP property near station 1C1

4.0 ANALYSIS OF ENVIRONMENTAL RESULTS

4.1 REMP SAMPLING VARIANCE / DEVIATIONS

The DCP Radiological Environmental Monitoring Program (REMP) allowed for deviations in the REMP sampling schedule "if samples were unobtainable due to hazardous conditions, seasonal unavailability, or malfunction of sampling equipment." Such deviations did not compromise the program's effectiveness and were normally anticipated for any radiological environmental monitoring program. The DCP REMP included both required and supplemental samples. This section described the variances/deviations with sampling.

4.1.1 DIRECT RADIATION

The ISFSI projects team loaded an additional 9 spent fuel dry casks onto the DCP ISFSI pad during the third quarter of 2018 (3Q18). This contributed to the increased station IS-3 through IS-7 exposures in 2020.

4.1.2 AIRBORNE RADIOACTIVITY

The 2020 mean percent availability for on-site and off-site particulate and iodine (P&I) air samplers was 99.9 percent. In other words, P&I air samplers were running 99.9 percent of the time. Less than 0.1 percent of run time could be attributed to equipment problems, filter exchanges, or calibration processes.

There were no REMP air sampler loss run times in 2020.

Actual 2020 percent availabilities for each station were as follows:

OS2 = 100 %

1S1 = 100 %

5F1 = 100 %

7D1 = 99.9 %

8S1 = 100 %

8S2 = 100 %

MT1 = 100 %

Airborne C-14 supplemental sampling was performed weekly at stations 8S1 (SE Sector), OS2 (NW Sector), and 5F1 (control station in San Luis Obispo) in 2020.

General Engineering Labs and DCPD REMP personnel worked together to develop a method for sampling inorganic environmental airborne C-14 (as CO₂). It should be noted that C-14 lab data were reported in units of $\mu\text{Ci}/\text{m}^3$ (not pCi/m^3) within Appendix A.

GEL has monitored C-14 samples from various locations around the US. In some instances, a very slight negative bias has been observed in annual data sets. The bias was not enough to mask any true positive detection of C-14. GEL believes this bias may be the result of the sorbent picking up other chemical species in the field during the week-long collection. These chemical species (possibly SO₂ or NO₂) could cause some quenching effects in the liquid scintillation analysis and varies by site location. This chemical interference created a net effect where some field cartridges were slightly lower in activity than laboratory blanks. The bias was less than the average two sigma method uncertainty and significantly less than the method average detection limit.

4.1.3 MARINE SAMPLES

DCM supplemental quarterly intertidal algae samples were unavailable during all of 2020.

All remaining 2020 marine samples were collected as scheduled (including allowable variation).

The California Department of Fish and Game issued regulations prohibiting the collection of abalone along the central and southern coast of California. PG&E considers it unlikely that future collection of abalone will be allowed within the DCPD environs. The REMP has therefore ceased routine abalone sampling. Note that the sampling of abalone was previously performed and was supplemental to the REMP.

4.1.4 TERRESTRIAL SAMPLES

All 2020 terrestrial samples were collected as scheduled (including allowable variation) with the following exceptions:

- Supplemental Blanchard Sheep Meat (BSM) and Blanchard Goat Meat (BGM) were not available and were not provided by the rancher during all of 2020. Blanchard sheep and goats were not within 5 miles of the DCPD site in 2020.

4.1.5 SURFACE WATER, DRINKING WATER, AND GROUNDWATER

Shallow French drain DY1 quarterly sampling was removed from the ODCM in 2019 due to known collection of rain washout tritium which was discussed in RIS2008-003. Going forward, station DY1 will be pumped down annually after the rainy season and sampled during pump down. The DY1 sample results were reported in Appendix A.

Observation Well 02 (OW2) was dry and not collected during all four quarters of 2020.

All remaining 2020 water samples were collected as scheduled (including allowable variation).

4.1.6 REPLICATE SAMPLES

Replicate sampling was conducted within the REMP for program strength and quality.

A replicate sample is an additional sample (same matrix type and station) taken independently from the original scheduled REMP sample. The replicate sample collection is performed by a different person and shipped to GEL to ensure independent analysis result correlation and method consistency.

Replicate samples were taken from:

- CBA – Cambria Beach Sand (3/18/20)
- 2F1 – Market Fish (5/14/20)
- DCM – Diablo Cove Sea Water (8/10/20)
- 7C2 – Rattle Snake Canyon Sea Water (11/5/20)

The results of the replicate analyses were within expected correlation of routine sampling.



Intertidal mussel sampling



California sea lion colony directly off DCPD coastline

4.2 COMPARISON OF ACHIEVED LLDs WITH REQUIREMENTS

For each analysis having a Lower Limit of Detection (LLD) requirement, criteria and process procedures were in place to achieve the calculated “*a-priori*” (before the fact) LLD. Meeting those criteria satisfies the “*a-priori*” LLD requirements. The “*a-posteriori*” (after the fact) Minimum Detectable Concentration (MDC) for that analysis was also compared with the required “*a-priori*” LLD.

Table 2.3 of this report lists the required “*a-priori*” LLDs for environmental sample analyses required by the DCPD Radiological Environmental Monitoring Program.

Occasionally an LLD may have been unachievable due to sampling process situations, such as hold times between sampling and analysis.

Both the Novel Coronavirus 2019 (Covid-19) Pandemic and the unprecedented wildfire season in California in 2020 attributed to various *a-priori* LLD sampling process situations.

Delivery time LLDs were not met for various DCPD REMP biological samples throughout 2020 due to Covid-19 government imposed shipping company constraints. These samples were:

- OEL drinking water (collected on 8/4/2020)
- 5F2 milk (collected on 8/11/2020)
- 5F2 milk (collected on 9/8/2020)
- OUT, 7C2, DCM sea water (collected on 10/19/2020)
- 7C2, POS, PON, DCM kelp (collected on 10/19/2020)
- BCM meat (collected on 10/22/2020)
- 3C1 vegetation and fruit (10/22/2020).

All of these items were resampled by REMP personnel and sent to the analyzation lab within a-priori LLD delivery time requirements.

Air sample volume collection a-priori LLDs were not met during various weeks in 2020 due to filter loading associated with the California wildfires. These weeks were:

- 8/19/2020 - 8/26/2020 (all air sample locations)
- 9/9/2020 - 9/16/2020 (all air sample locations)
- 9/23/2020 - 9/30/2020 (air sample locations 8S1, MT1)
- 9/30/2020 - 10/7/2020 (all air sample locations)

All other REMP samples met the specified “a-priori” LLD requirements in 2020.

Additional variance issues related to the Covid-19 pandemic:

The 2020 Land Use Census was performed by REMP personnel before the Covid-19 pandemic began in March of 2020. REMP personnel conducted follow-up interviews near the end of 2020 to see if any information had changed. Islay Creek Campground and Camp Keep had been closed in April of 2020 due to the pandemic. The numbers for day use and campground overnight use were not what was originally projected for 2020. There were no other changes reported from Land Use Census interviews.

4.3 COMPARISON OF RESULTS AGAINST REMP REPORTING LEVELS

NRC notification was required whenever a Reporting Level listed in Table 2.4 of this report was exceeded. Reporting Levels were the environmental concentrations that relate to the ALARA design dose objectives of 10 CFR 50, Appendix I.

It should be noted that environmental isotopic concentrations were averaged over the calendar quarter for the purposes of this comparison, and that Reporting Levels applied only to DCPD plant related effluent radioactivity.

No REMP NRC Reporting Levels were exceeded during the 2020 monitoring period.



Intertidal algae sampling at 7C2



DCPP site coastline looking south

4.4 DATA ANALYSIS BY MEDIA TYPE

The REMP data for each media type is discussed below. A sample was considered to yield a “detectable measurement” when the resultant concentration exceeded the MDC for that analysis.

4.4.1 Direct Radiation (Environmental TLDs)

Direct radiation was continuously measured at 32 locations surrounding DCP using Panasonic UD-814 type thermo-luminescent dosimeters (TLDs). These 32 locations were made up of 29 indicator stations & 3 control stations. These Environmental (Env) TLD station dosimeters were distributed and collected every calendar quarter for processing. Methodology from ANSI/HPS N13.37-2014 "Environmental Dosimetry - Criteria for System Design and Implementation" was used to evaluate and report the Env TLD data. Historical background baseline values for each station were established using 2004 to 2014 Env TLD data.

DCPP "Standard Quarter TLD Results" were measurements of all environmental gamma radiation sources (cosmic, terrestrial, radon, and man-made) at each station during the deployment period. Transient and lab storage background dose contributions were subtracted prior to reporting the "Standard (Std) Quarter (Qtr) TLD Results".

Technically, these TLDs read out in units of milliroentgen. Because gamma radiation has a quality factor of approximately 1 for conversion from milliroentgen to millirem, the environmental TLD unit of reporting was converted to millirem (mrem) for consistency of unit reporting and ease of exposure communications.

An evaluation of direct radiation measurements and member of public occupancy times within the site boundary indicated all federal criteria for member-of-public dose limits (10CFR20.1301) were conservatively met. An evaluation of direct radiation measurements indicated all federal EPA 40CFR190 criteria were conservatively met. Comparing data from the 2020 DCPD Annual Radiological Effluent Release Report (ARERR), dose to a member-of-public resulting from gaseous effluent releases at DCPD was an extremely small fraction of annual Env TLD background dose. Therefore, it was concluded that gaseous effluents from DCPD had negligible impact on site related measured Env TLD values.

The following chart reports the 2020 Env "Standard Quarter TLD Results" for each individual station. These individual station results were compared to their "Historical Quarterly Baseline" values which were calculated using individual station data from 2004 to 2014.

Chart column reporting methodology was as follows:

- **ND** = Not Detected
- **Quarterly Investigation Level Dose** = Std Qtr TLD result - Historical Quarterly Baseline; If ≤ 6 , report "ND". If > 6 , report value (mrem).
- **Annual TLD Result** = Qtr 1 + Qtr 2 + Qtr 3 + Qtr 4 Std Qtr TLD Results
- **Annual Investigation Level Dose** = Annual TLD Result - Historical Annual Baseline; If ≤ 12 , report "ND". If > 12 , report value (mrem).

If Quarterly or Annual Investigation Level Dose was detected, an evaluation of DCPD facility contribution was conducted and explained within this report.

2020 Quarterly REMP Env TLD Analysis											2020 Annual REMP Env TLD Analysis		
DCPP Station ID	Distance in miles	Historical Quarterly Baseline (mrem)	2020 Standard Quarter TLD Results (mrem)				2020 Quarterly Investigation Level Dose (mrem)				Historical Annual Baseline (mrem)	2020 Annual TLD Result (mrem)	2020 Annual Investigation Level Dose (mrem)
			Qtr 1	Qtr 2	Qtr 3	Qtr 4	Qtr 1	Qtr 2	Qtr 3	Qtr 4			
MT1	0.2	21.5	18.6	18.3	20.2	17.4	ND	ND	ND	ND	86.0	74.6	ND
WN1	0.2	12.7	12.0	11.3	12.8	14.1	ND	ND	ND	ND	50.8	50.2	ND
OS1	0.1	20.7	19.1	18.1	21.7	20.8	ND	ND	ND	ND	82.8	79.7	ND
5S1	0.4	23.1	21.9	20.5	21.9	21.1	ND	ND	ND	ND	92.4	85.4	ND
6S1	0.5	14.0	13.7	12.4	13.4	12.7	ND	ND	ND	ND	56.0	52.2	ND
8S1	0.5	17.1	16.3	15.8	16.7	14.9	ND	ND	ND	ND	68.4	63.7	ND
8S2	1.1	21.0	19.2	17.7	20.5	18.4	ND	ND	ND	ND	84.0	75.8	ND
5S3	0.7	19.2	17.2	16.5	19.5	16.7	ND	ND	ND	ND	76.8	69.9	ND
2F2	11.2	14.1	13.7	12.8	13.1	12.1	ND	ND	ND	ND	56.4	51.7	ND
2D1	6.9	12.8	12.5	11.6	13.1	11.8	ND	ND	ND	ND	51.6	49.0	ND
4D1	7.6	11.9	10.5	10.1	11.1	9.7	ND	ND	ND	ND	47.6	41.4	ND
5F1	10.2	17.5	16.0	15.4	17.2	14.9	ND	ND	ND	ND	70.0	63.5	ND
1A1	1.6	12.0	11.0	9.8	11.9	11.0	ND	ND	ND	ND	48.0	43.7	ND
7D2	7.6	16.6	14.9	14.4	17.0	15.4	ND	ND	ND	ND	66.4	61.7	ND
7G2	17.3	17.6	16.1	16.2	17.8	16.0	ND	ND	ND	ND	70.4	66.1	ND
7C1	4.1	18.1	14.4	16.7	17.2	16.6	ND	ND	ND	ND	72.4	65.0	ND
7F1	10.8	17.1	16.0	15.5	17.8	15.6	ND	ND	ND	ND	68.4	64.9	ND
OB1	3.6	10.2	8.7	8.1	10.0	11.8	ND	ND	ND	ND	40.8	38.6	ND
7D1	6.6	11.2	10.4	10.0	10.6	10.0	ND	ND	ND	ND	44.8	41.1	ND
4C1	5.8	10.6	10.1	9.9	10.4	9.1	ND	ND	ND	ND	42.4	39.6	ND
OS2	0.5	17.7	14.7	16.1	17.0	17.5	ND	ND	ND	ND	70.8	65.3	ND
1S1	0.4	17.4	16.2	14.3	17.5	14.9	ND	ND	ND	ND	69.6	63.0	ND
2S1	0.2	16.8	15.3	14.9	16.3	14.5	ND	ND	ND	ND	67.2	61.1	ND
3S1	0.4	20.9	18.1	18.9	20.4	17.9	ND	ND	ND	ND	83.6	75.4	ND
4S1	0.5	19.5	18.9	17.5	19.7	17.4	ND	ND	ND	ND	78.0	73.5	ND
7S1	0.3	18.5	19.3	17.6	19.4	17.9	ND	ND	ND	ND	74.0	74.2	ND
9S1	0.4	22.6	20.6	20.6	21.5	20.4	ND	ND	ND	ND	90.4	83.2	ND
1C1	4.7	13.2	13.0	11.8	12.8	11.8	ND	ND	ND	ND	52.8	49.5	ND
5C1	4.7	16.4	14.0	14.8	17.6	14.7	ND	ND	ND	ND	65.6	61.1	ND
3D1	6.2	12.8	12.5	11.4	13.0	14.0	ND	ND	ND	ND	51.2	50.8	ND
6D1	8.3	14.1	13.0	12.7	14.3	13.2	ND	ND	ND	ND	56.4	53.2	ND
5F3	12.7	17.2	14.1	13.7	14.6	13.3	ND	ND	ND	ND	68.8	55.7	ND

ND = Not Detected

The 2020 AREOR historical baselines have been determined using ANSI/HPS N13.37-2014 methodology and Env TLD station results from approximately 2004 to 2014.

Quarterly Investigation Level Dose = Standard Quarter TLD result - Historical Quarterly Baseline. If ≤ 6 , report "ND". If > 6 , report value (mrem).

Annual TLD Result = Qtr 1 + Qtr 2 + Qtr 3 + Qtr 4 Standard Quarter TLD Results


Annual Investigation Level Dose = Annual TLD Result - Historical Annual Baseline. If ≤ 12 , report "ND". If > 12 , report value (mrem).

See DCP Station ID Maps in Figure 2.1 and Figure 2.2

The following graph illustrated overall trending of Env TLDs with regard to distance from the DCPD plant site. The Env TLD results were measurements of all environmental gamma radiation sources (cosmic, terrestrial, radon, and man-made) during the deployment period to allow for trending.

Inner ring, outer ring, special interest, and control stations were combined and averaged to obtain a single standard quarter value for each represented plot line.

Inner ring, outer ring, special interest, and control stations Env TLD averages remained within and trended with pre-operational Env TLD ranges. DCPD operations did not affect Env TLD results.

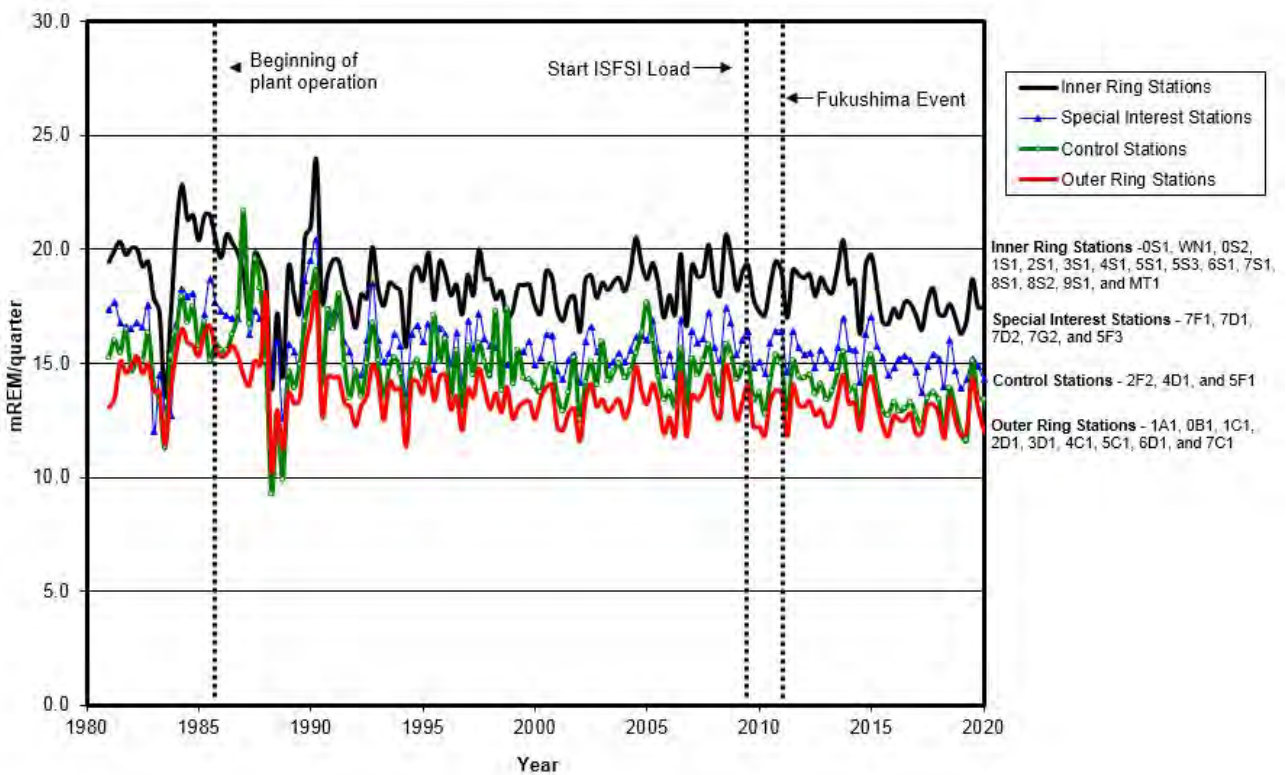


The following graph illustrated averaged Env TLD results from the southeast sector (stations 8S1, 8S2) and northwest sector (stations 0S1, 0S2, 0B1). The Env TLD results were measurements of all environmental gamma radiation sources (cosmic, terrestrial, radon, and man-made) during the deployment period to allow for trending.

These sectors were chosen for graphical trending due to their historically high averaged wind rose directions and would therefore indicate the most gaseous effluent impact on Env TLD results.

The southeast and northwest sectors Env TLD averages trended with pre-operational Env TLD ranges. DCPP operations did not affect Env TLD results within these sectors.

Averaged control stations (2F2, 4D1, 5F1) were provided for reference.

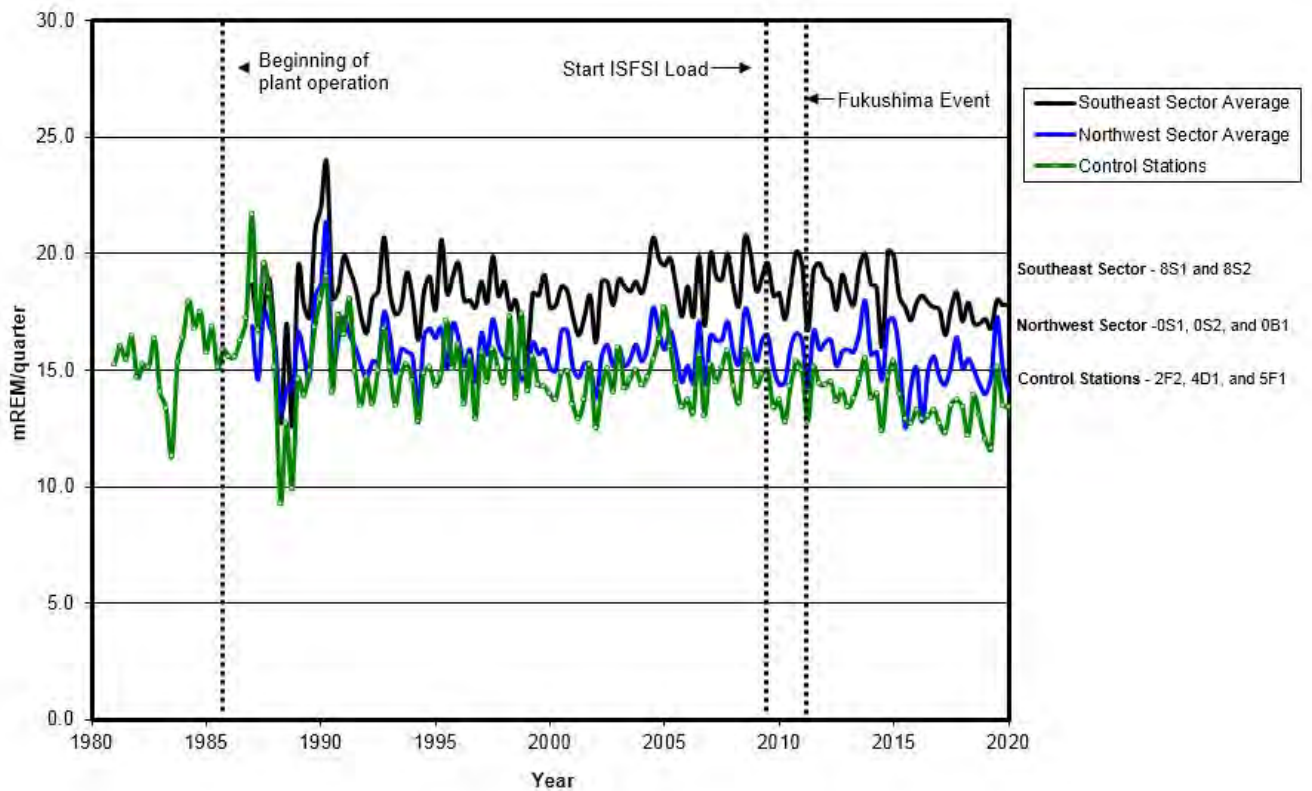

Direct Radiation from onsite ISFSI

DCPP was licensed with an exclusion area boundary (i.e. site boundary) as an approximate 880-yard radius from U-1 Containment center. No permanent public access was permitted within the exclusion area. The unrestricted area (i.e. outside the site boundary) surrounding DCPP was sparsely inhabited out to five miles from the site (ref. 2020 Land Use Census within Section 8).

The direct radiation levels within a very small area surrounding the onsite ISFSI were elevated due to dry cask spent fuel storage. ISFSI pad TLD stations IS-1 through IS-8 were located adjacent to the ISFSI pad fencing (see map in Figure 2.2 of this report). The remaining onsite areas were not affected with exposure due to the ISFSI topographical elevation and placement within an onsite hillside which provided radiation shielding to the rest of the site. There was a total of 58 loaded dry casks stored within the onsite ISFSI in 2020.

- The first spent fuel dry cask canister was loaded onto the ISFSI pad in June 2009. The small increase in radiation levels at the ISFSI pad prior to the first spent fuel canister load was due to storage of Radioactive Material (RAM) equipment in seatrains at the ISFSI pad prior to an outage. These seatrains of RAM were removed prior to the first load of spent fuel dry cask canisters.
- Dry cask loading Campaign # 2 occurred in May 2010.
- Dry cask loading Campaign # 3 occurred during the first quarter of 2012 and ended on 3/17/2012.
- Dry cask loading Campaign # 4 occurred from August to October of 2013.
- Dry cask loading Campaign #5 occurred from 5/1/15 to 7/3/15 with the addition of 8 dry casks onto the onsite ISFSI.
- Dry cask loading Campaign #6 occurred from 8/8/16 to 11/12/16 with the addition of 12 dry casks onto the onsite ISFSI.
- Dry cask loading Campaign #7 occurred from 6/9/18 to 8/18/18 with the addition of 9 dry casks onto the onsite ISFSI.

The following chart reports the 2020 ISFSI Env "Standard Quarter TLD Results" for each individual station. These individual ISFSI station results were compared using the 2004 to 2014 "Historical Quarterly Baseline" and "Historical Annual Baseline" value at station 5S1.

Station 5S1 was used for historical baseline purposes due to 5S1 close proximity to the ISFSI pad and 5S1 pre-ISFSI historical data.

Chart column reporting methodology was as follows:

- **ND** = Not Detected
- **Quarterly Investigation Level Dose** = Std Qtr TLD result - Historical Quarterly Baseline; If ≤ 6 , report "ND". If > 6 , report value (mrem).
- **Annual TLD Result** = Qtr 1 + Qtr 2 + Qtr 3 + Qtr 4 Std Qtr TLD Results
- **Annual Investigation Level Dose** = Annual TLD Result - Historical Annual Baseline; If ≤ 12 , report "ND". If > 12 , report value (mrem).

		2020 Quarterly ISFSI Env TLD Analysis								2020 Annual ISFSI Env TLD Analysis			
DCPP Station ID	Distance in miles	Historical Quarterly Baseline (mrem)	2020 Standard Quarter TLD Results (mrem)				2020 Quarterly Investigation Level Dose (mrem)				Historical Annual Baseline (mrem)	2020 Annual TLD Result (mrem)	2020 Annual Investigation Level Dose (mrem)
			Qtr 1	Qtr 2	Qtr 3	Qtr 4	Qtr 1	Qtr 2	Qtr 3	Qtr 4			
IS-1	0.3	23.1	23.1	23.0	24.6	22.7	ND	ND	ND	ND	92.4	93.6	ND
IS-2	0.3	23.1	24.2	23.9	23.4	23.1	ND	ND	ND	ND	92.4	94.6	ND
IS-3	0.3	23.1	58.5	56.8	57.1	51.7	35.4	33.7	34.0	28.6	92.4	224.1	131.7
IS-4	0.3	23.1	106.7	98.2	110.3	95.1	83.6	75.1	87.2	72.0	92.4	410.4	318.0
IS-5	0.3	23.1	41.8	42.7	47.2	40.5	18.7	19.6	24.1	17.4	92.4	172.2	79.8
IS-6	0.3	23.1	41.6	40.3	44.9	38.2	18.5	17.2	21.8	15.1	92.4	165.0	72.6
IS-7	0.3	23.1	46.5	44.2	47.5	40.9	23.4	21.1	24.4	17.8	92.4	179.1	86.7
IS-8	0.3	23.1	24.1	22.3	25.7	22.5	ND	ND	ND	ND	92.4	94.6	ND

ND = Not Detected

The 2020 AREOR historical baselines have been determined using ANSI/HPS N13.37-2014 methodology and Env TLD station 5S1 results from approximately 2004 to 2014.

The historical baseline from REMP Station 5S1 was used for the ISFSI stations due to its onsite close proximity to ISFSI.

Quarterly Investigation Level Dose = Standard Quarter TLD result - Historical Quarterly Baseline. If ≤ 6 , report "ND". If > 6 , report value (mrem).

Annual TLD Result = Qtr 1 + Qtr 2 + Qtr 3 + Qtr 4 Standard Quarter TLD Results

Annual Investigation Level Dose = Annual TLD Result - Historical Annual Baseline. If ≤ 12 , report "ND". If > 12 , report value (mrem).

See DCPD Station ID Map in Figure 2.2

The Quarterly Investigation Level and Annual Investigation Level doses were due to spent fuel dry casks stored on the ISFSI pad.

The DCPD ISFSI Pad is located conservatively within the DCPD site boundary and is not located within the unrestricted area.

The DCPD ISFSI Pad is topographically elevated above most of the site and is built into a hillside. These characteristics shield onsite locations from ISFSI related radiation.

No permanent public access is permitted onsite within the DCPD site boundary.

Access occupancy surrounding the onsite ISFSI is restricted and controlled by DCPD Security. The above reported annual exposures are 24 x 365 occupancy exposure at that location.

If someone was to reside in a low occupancy condition (about 2.5 hrs per week) at ISFSI location IS-4 all year, their resulting exposure would be about 4.7 mrem/year above background.


10CFR20.1301 onsite member of public exposure and 40CFR190 unrestricted area exposure were evaluated. Dose limits were not exceeded and were conservatively met.

"Quarterly and Annual Investigation Level Dose" was detected at ISFSI Env TLD stations IS-3 through IS-7 due to DCPD spent fuel dry casks stored on the ISFSI pad.

The DCPD ISFSI Pad was not located within the unrestricted area and therefore uncontrolled member-of-public access to PG&E property did not result in any unrestricted area exposure. An evaluation of direct radiation measurements within the unrestricted area indicated all federal EPA 40CFR190 criteria for public dose limits were conservatively met.

Uncontrolled public access was not permitted within the DCPD site boundary. The DCPD ISFSI Pad was located conservatively within the DCPD site boundary. The DCPD ISFSI Pad was topographically elevated above most of the site and was built into a hillside. These characteristics shielded most onsite locations from ISFSI related radiation. Personnel access surrounding the onsite ISFSI was restricted and controlled by DCPD security to a low occupancy condition of less than 2.5 hours per week. The reported ISFSI Env TLD annual exposures were for an occupancy condition of 24 hours per day and 365 days per year surrounding the ISFSI pad. Therefore, if someone was to reside in a low occupancy condition at ISFSI location IS-4 all year, their resulting annual exposure would have been approximately 4.7 millirem above annual background radiation exposure. This total 4.7 millirem annual exposure would have been approximately equivalent to exposure from a ten-hour airline flight. An evaluation of direct radiation measurements and member-of-public occupancy times within the site boundary indicated all federal criteria for member-of-public dose limits (10CFR20.1301) were conservatively met.

The following page contains a trend graph of the onsite ISFSI pad averaged TLD results (IS-1 through IS-8) and a picture of the ISFSI pad. The Env TLD results were measurements of all environmental gamma radiation sources (cosmic, terrestrial, radon, and man-made) during the deployment period to allow for trending.

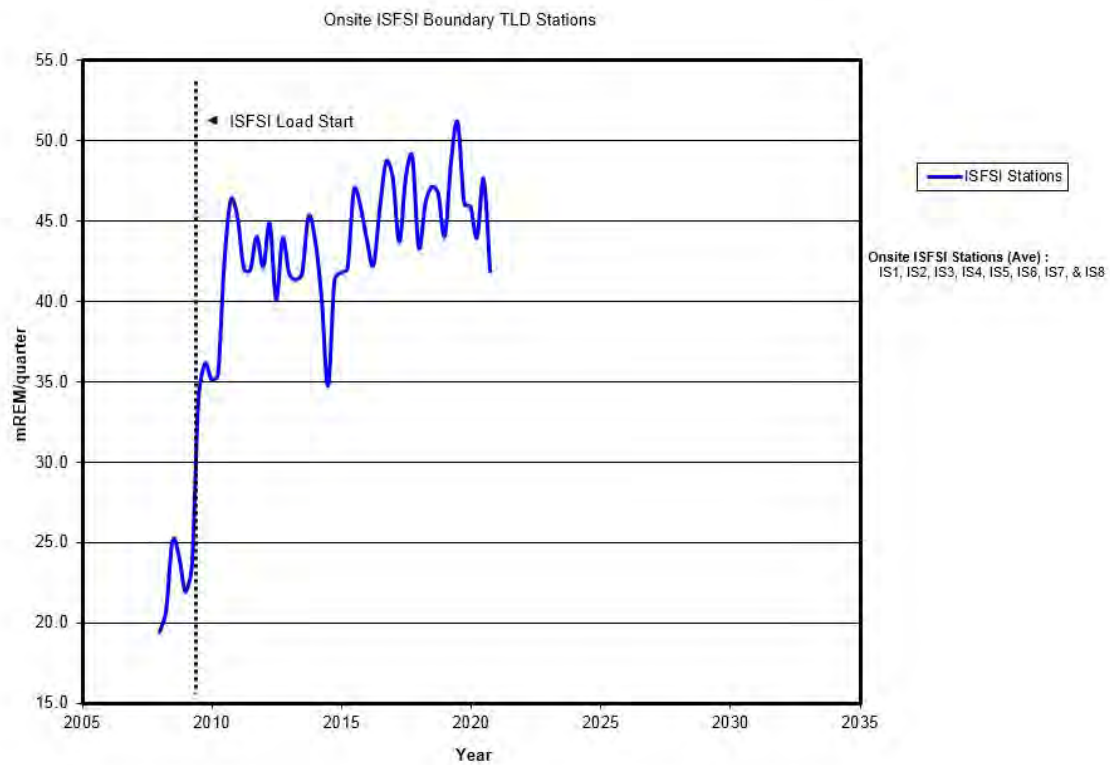

DCPP ISFSI Pad within hillside, on south side of the make-up water reservoirs

4.4.2 Airborne

Air particulate and radioiodine samples were collected weekly from six indicator stations (MT1, 0S2, 1S1, 7D1, 8S1, and 8S2) in the DCPD environs and at one control station (5F1). A total of 364 air particulate filters and 364 iodine cartridges were collected and analyzed as part of the normal REMP.

Natural occurring gross beta activity was detected in every weekly air particulate sample collected from all indicator and control stations. Comparison of the data showed that the mean values of gross beta activities for the indicator stations were consistent with those obtained for the control station and historical trending. Normal background gross beta values ranged from $2.49\text{E-}3$ to $7.99\text{E-}2$ pCi/m³.

Gamma isotopic analyses were performed on quarterly composites of the 13 air particulate filters from each of the REMP air stations. The midpoint date of the quarter was used to label the composite. There were no gamma isotopic detections in 2020.

A total of 364 REMP weekly TEDA air cartridges were analyzed for I-131 in 2020. There were no detections of I-131 in 2020.

Airborne Carbon-14 samples were collected weekly from two indicator stations (8S1, 0S2) in the DCPD environs and at one control station (5F1). A total of 156 Carbon-14 cartridges were collected and analyzed as part of the REMP. Carbon-14 was detected at station 8S1 due to facility operations during the weeks of 1/22/2020 – 1/29/2020, 7/29/2020 – 8/5/2020, 10/7/2020 – 10/14/2020, and 10/17/2020 – 10/21/2020.

Carbon-14 was detected at station 0S2 during the week of 10/14/2020 – 10/21/2020 due to facility operations. Exposure results were negligible and actual exposure results can be referenced in the 2020 DCPD ARERR found on the NRC website. All other Carbon-14 air cartridge results were non-detectable.

Appendix A contains the individual air sampling station data results.



Great White Shark in Diablo Cove

4.4.3 Drinking Water and Ocean Surface Water

Drinking Water

Drinking water samples were collected from indicator stations 1A2, 5S2, DW1, WN2, and control station OEL. The samples were analyzed for gamma emitters, gross beta, tritium, total strontium 89/90, Iron-55, and Nickle-63. No DCPD related radionuclides were detected in any of the 2020 drinking water samples.

The results of the drinking water samples were individually listed in Appendix A.

Ocean Surface Water

Ocean surface water samples were collected monthly from indicator stations DCM, OUT, and control station 7C2. The samples were analyzed for gamma emitters, gross beta, tritium, total strontium 89/90, Iron-55, and Nickle-63. No DCPD related radionuclides were detected in any of the 2020 ocean surface water samples.

The results of the surface water samples were individually listed in Appendix A.



Kelp forest directly off the DCP site coastline

4.4.4 Ingestion

Marine Biological Samples

Mussels were collected quarterly from stations DCM, POS, and 7C2. Mussels were collected annually from station PON (due to availability at station PON). No DCP related radionuclides were detected in any of the 2020 mussel samples.

Fish samples were collected quarterly from stations DCM, PON, POS, 7C2 (control), and a local fish market (2F1 or 7D3). Market fish samples were locally caught rock fish.

Cs-137 was detected in fish at the following stations, dates, and concentrations:

- | | | |
|----------------|-----------|-------------|
| • 2F1 Rockfish | 4/13/2020 | 8.41 pCi/kg |
| • 2F1 Rockfish | 5/14/2020 | 14.0 pCi/kg |
| • 7D3 Rockfish | 5/14/2020 | 14.7 pCi/kg |

Pre-operational (pre-1985) DCP REMP sampling observed measurable Cs-137 in fish and sediment due to atmospheric nuclear weapons testing fallout from the 1960's and

1970's. Finding Cs-137 in fish or sediment has been historically common in SLO County and the DCPD environs due to atomic weapons testing fallout. The approximate historical fish Cs-137 concentrations have ranged from 3 to 14 pCi/kg. The 2020 concentrations of Cs-137 detected in fish coincided with the historical pre-operational scope of data.

This Cs-137 activity was also in agreement with the 1981 California Dept of Health Services Radiological Health Branch report and was considered part of SLO County background radioactivity. The preoperational 1981 ranges of Cs-137 observed in the Diablo cove (DCM) fish were 0 to 26 pCi/kg (decay corrected 0 to 11 pCi/kg in 2020). The 1981 ranges of Cs-137 observed in market fish were 0 to 38 pCi/kg (decay corrected 0 to 15 pCi/kg in 2020). The 1981 ranges of Cs-137 observed in ocean sediment were 0 to 93 pCi/kg (decay corrected 0 to 38 pCi/kg in 2020). The 1981 ranges of Cs-137 observed in soil were 0 to 298 pCi/kg (decay corrected 0 to 121 pCi/kg in 2020). Another recent background source of Cs-137 into California environs was due to the March 2011 Fukushima Event and subsequent jet stream isotopic dispersion to the United States.

Because Cs-137 has an isotopic half-life of approximately 30 years, this contaminant should be detected in the California environs for the next 10 to 40 years depending on initial concentration and the detection sensitivity of the REMP analyses. Cs-137 has a longer environmental half-life in coastal seawaters than in open oceans due to input sources like rain watershed runoff and storm condition sediment re-suspension.

There were also no Cs-134 found in these fish samples. Cs-134 has a shorter isotopic half-life (approximately 2 years), would be indicative of nuclear reactor fission products, and would not be attributed to atomic weapons testing. Because Cs-134 was absent in the REMP fish analyses; fish Cs-137 concentrations were attributed to either pre-1980's nuclear weapons testing or Fukushima related fallout with sediment re-suspension into watershed/storm runoff.

All marine fish and mussel samples did not detect any DCPD related radionuclides in 2020. The results of marine biological samples were individually listed in Appendix A.



Station PON



Station MDO beach sampling

Marine Aquatic Vegetation

Supplemental marine aquatic kelp sampling was performed quarterly at REMP sample indicator stations DCM, PON, POS, and 7C2 (control).

Supplemental intertidal algae sampling was performed quarterly at REMP sample station 7C2. Station DCM algae was unavailable in 2020.

Each sample was analyzed for gamma emitting radionuclides. No DCPP related isotopes were detected in 2020. The results of the marine aquatic vegetation sampling were individually listed in Appendix A.

Ocean Sediment and Recreational Beach Sampling

Ocean sediment samples were collected annually from stations DCM and 7C2.

Supplemental recreational beach sand samples were collected semi-annually from stations AVA, MDO, PMO, CYA, and CBA. Each sample was analyzed for gamma emitting radionuclides, total strontium 89/90, Iron-55, and Nickle-63.

Only natural occurring isotopes were detected in the ocean sediment and recreational beach sand samples collected for 2020. The results of ocean sediment and recreational beach sand sampling were individually listed in Appendix A.



Station 7G1 vegetation in Arroyo Grande CA

4.4.5 Vegetation (Food Crops)

Samples of broad leaf vegetation were collected monthly (when available) from two indicator stations (5F2 and 7C1), and one control location (7G1).

Supplemental samples were also collected quarterly from residence or commercial gardens at stations 3C1, 6C1, and 7E1. The samples were analyzed for gamma emitting radionuclides.

No DCP related isotopes were detected in 2020 vegetation.

The analysis results of vegetation sampling were individually listed in Appendix A.



Cal Poly Station 5F2

4.4.6 Milk

There are no milking animals (for human consumption) within 5 miles of the plant site. In substitution, the DCPD REMP required additional air sampling at stations 1S1 and 8S2.

Supplemental samples of milk were collected monthly from Cal Poly Farm (station 5F2) due to the Cal Poly dairy being the closest milk producer relative to the DCPD site and regardless of the availability of milk stations within 5 miles of the plant.

The milk samples were analyzed for gamma emitting radionuclides, Iodine-131, and total strontium 89/90. No DCPD related radionuclides were detected in station 5F2 milk samples during 2020.

The results of the milk samples were individually listed in Appendix A.



Ranchers near Station 7C1

4.4.7 Meat Products

Meat products were collected quarterly when available or provided from landowners.

Blanchard cattle were allowed to graze on the northern DCPD lands during 2020.

Blanchard Cow Meat (BCM) was sampled quarterly for gamma emitting radionuclides and total strontium 89/90.

Supplemental Blanchard Sheep Meat (BSM) and Blanchard Goat Meat (BGM) were not available and were not provided by the rancher during all of 2020. Blanchard sheep and goats were not within 5 miles of the DCPD site in 2020.

Station CCM, free range, grass fed beef sampling was conducted outside the influence of DCPD. Quarterly CCM meat was purchased by REMP personnel from the Whole Foods Market in SLO and consisted of Hearst Ranch ground beef.

No DCPD related isotopes were detected in meat during 2020. The results of the meat samples were individually listed in Appendix A.



Station GW2 groundwater sampling

5.0 GROUND WATER MONITORING

Diablo Canyon is committed to improving management of situations involving inadvertent radiological releases that get into onsite groundwater. This commitment reflects the nuclear industry's high standard of public radiation safety and protection of the environment. Trust and confidence on the part of local communities, California State, the NRC, and the public is paramount to this commitment.

Groundwater gradient studies of the DCPD ISFSI site and a general assessment of sub-regional hydro-geologic conditions indicates that groundwater (subsurface) flow beneath the Diablo Canyon power block is west to northwest toward the Pacific Ocean. Any groundwater present beneath the DCPD power block was not used as a source of drinking water.

5.1 NEI 07-07 GROUNDWATER PROTECTION INITIATIVE - REPORTING

5.1.1 NEI 07-07 Objective 2.4 (b), Annual Reporting: "Document in the AREOR all on-site ground water sample results that are included in the REMP as described in the DCPD Offsite Dose Calculation Manual (ODCM)".

Onsite groundwater monitoring points are described in the REMP and reported in this 2020 Annual Radiological Environmental Operating Report (AREOR) as follows:

Observation Well 01 (OW1), Observation Well 02 (OW2), DCSF96-1 (8S3), Water Well 02 (WW2), Groundwater Well 1 (GW1), Groundwater Well 2 (GW2), and Diablo Creek Outlet (WN2) were used for Groundwater Protection Initiative (GPI) data reporting and were described in 2020 DCPD AREOR Table 2.1.

5.2 GROUNDWATER SAMPLING OVERVIEW:

As part of the nuclear industry NEI 07-07 Groundwater Protection Initiative (GPI), DCPD began sampling various ground water sources in 2006. These sources included onsite power block french-drain monitoring wells (OW1 & OW2), an aquifer well (WW2), Diablo Canyon creek (5S2 & WN2), up-gradient shallow well (8S3), and a groundwater spring (1A2). Two additional downgradient groundwater monitoring wells (stations GW1 and GW2) were installed along the western side of the DCPD site on December 14, 2011. REMP began sampling these two new wells during the first quarter of 2012.

One groundwater aquifer well (WW2) was available within the plant site boundary. This well was located about 250 feet above and to the east of the power block. WW2 was sampled quarterly for gamma emitters, gross beta, tritium, total strontium 89/90, Iron-55, and Nickel-63. No plant related radionuclides were detected in 2020.

One shallow (approximately 70 feet deep) up-gradient monitoring well (8S3) was located southeast at approximately 0.4 miles from the power block. 8S3 was sampled quarterly for gamma emitters, gross beta, tritium, total strontium 89/90, Iron-55, and Nickel-63. No plant related radionuclides were detected in 2020.

Two shallow (approximately 37 to 73 feet deep) french-drain systems discharge into two monitoring wells located within the plant protected area and in close proximity to the containment structures, spent fuel pools, and radiologically controlled area auxiliary

building. These french-drain system monitoring wells were stations Observation Well 01 (OW1) and Observation Well 02 (OW2).

OW2 was not sampled in 2020 due to no water present in the well during the entire 2020 timeframe. There has been an ongoing severe drought in San Luis Obispo County which contributed to this dry well.

Station OW1 contained low levels of tritium throughout 2020 due to rainwater washout of gaseous tritium exiting the plant vent system. This tritium was evaluated and attributed to the rain-washout of gaseous tritium exiting the plant vent system via an approved monitored radioactive effluent discharge path. DCPD conducted rain-washout studies to document this phenomenon. Rain-washout tritium communicated with these french-drain systems via building structure to ground interfaces. Once rain water entered the monitoring wells, the water remained stagnant until another rain event caused transport. Subsequent quarterly sampling routinely indicated consistent tritium values due to monitoring well stagnation. These tritium concentrations were evaluated and were not due to a plant system leak or spill.

OW1 was connected to subsurface groundwater flow fissures and routinely trends with rain fall.

The specific ranges of tritium detected in these power block monitoring wells for 2020 were as follows:

- OW1 - Observation Well 01 (412 to 586 pCi/L) 4 of 4 sample tritium analysis.
- OW2 - Observation Well 02 ; no samples collected (well dry).

No other DCPD related isotopes were detected in OW1 or OW2 during 2020.

As mentioned previously, two down-gradient monitoring wells were added to the REMP in 2012.

Groundwater Well 1 (GW1) was located between the DCPD protected area and the Pacific Ocean cliff boundary. This well opening was located at approximately 85' above sea level on the same plane as the power block and was approximately 85' deep.

Groundwater Well 2 (GW2) was located between the DCPD protected area and the Pacific Ocean cliff boundary. This well opening was located at approximately 85' above sea level on the same plane as the power block and was approximately 85' deep.

The specific ranges of tritium detected in GW1/GW2 monitoring wells for 2020 were as follows:

- GW1 - Groundwater Well 1 ; no tritium detected
- GW2 - Groundwater Well 2 ; no tritium detected

No other DCPD related isotopes were detected in GW1 or GW2 in 2020.

All other samples of groundwater at 1A2, 5S2, 8S3, and WN2 did not indicate the presence of tritium or any other DCPD related isotopes (only NORM isotopes were observed) in 2020.

The results of groundwater sampling were individually listed in Appendix A.

Rain washout of tritium is discussed within NRC Regulatory Issue Summary (RIS) 2008-003, "Return/Re-use of Previously Discharged Radioactive Effluents".

The following pages show the site structures, monitoring well locations, elevations, and groundwater gradient patterns on the site.






Figure 3: Plant Layout
Diablo Canyon Power Plant
Avila Beach
California





Old Steam Generator Storage Facility looking northwest

6.0 OSGSF MONITORING

An Old Steam Generator Storage Facility (OSGSF) long term storage vault was constructed within the DCPD site boundary in 2007 for storage of eight retired DCPD steam generators and two retired DCPD reactor heads. This OSGSF did not cause any changes to the ambient direct radiation levels within the DCPD environs during 2020. The OSGSF in-building sumps were inspected quarterly by REMP personnel.

For reference, the following equipment was placed into the OSGSF on the following dates:

- 3/2/08 (outage 2R14), four DCPD Unit Two (U-2) Steam Generators
- 2/14/09 (outage 1R15), four DCPD Unit One (U-1) Steam Generators
- 11/6/09 (outage 2R15), one DCPD Unit Two (U-2) Reactor (Rx) Head
- 10/23/10 (outage 1R16), one DCPD Unit One (U-1) Rx Head

7.0 CROSS CHECK PROGRAM

This page intentionally left blank.



2020 ANNUAL QUALITY ASSURANCE REPORT

FOR THE


RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM (REMP)

2020 ANNUAL QUALITY ASSURANCE REPORT

FOR THE

RADIOLOGICAL ENVIRONMENTAL

MONITORING PROGRAM (REMP)

Approved By  March 10, 2021
Robert L. Pullano Date
Director, Quality Systems

Rev. 1

TABLE OF CONTENTS

1. INTRODUCTION	5
2. QUALITY ASSURANCE PROGRAMS FOR INTER-LABORATORY, INTRA-LABORATORY AND THIRD PARTY CROSS-CHECK.....	5
3. QUALITY ASSURANCE PROGRAM FOR INTERNAL AND EXTERNAL AUDITS	7
4. PERFORMANCE EVALUATION ACCEPTANCE CRITERIA FOR ENVIRONMENTAL SAMPLE ANALYSIS	7
5. PERFORMANCE EVALUATION SAMPLES	7
6. QUALITY CONTROL PROGRAM FOR ENVIRONMENTAL SAMPLE ANALYSIS	8
7. SUMMARY OF DATA RESULTS.....	9
8. SUMMARY OF PARTICIPATION IN THE ECKERT & ZIEGLER ANALYTICS ENVIRONMENTAL CROSS-CHECK PROGRAM	9
9. SUMMARY OF PARTICIPATION IN THE MAPEP MONITORING PROGRAM	9
10. SUMMARY OF PARTICIPATION IN THE ERA MRAD PT PROGRAM.....	9
11. SUMMARY OF PARTICIPATION IN THE ERA PT PROGRAM.....	9
12. CORRECTIVE ACTION REQUEST AND REPORT (CARR)	9
13. REFERENCES	11

TABLES

Table 1 2020 Radiological Proficiency Testing Results and Acceptance Criteria	12
Table 2 2020 Eckert & Ziegler Analytics Performance Evaluation Results	23
Table 3 2020 DOE Mixed Analyte Performance Evaluation Program (MAPEP) Results	24
Table 4 2020 ERA Program Performance Evaluation Results	27
Table 5 2020 ERA Program (MRAD) Performance Evaluation Results	29
Table 6 REMP Intra-Laboratory Data Summary: Bias and Precision By Matrix.....	43
Table 7 All Radiological Intra-Laboratory Data Summary: Bias and Precision By Matrix.....	45
Table 8 2020 Corrective Action Report Summary.....	52

TABLE OF CONTENTS (CONTINUED)

FIGURES

Figure 1	Cobalt-60 Performance Evaluation Results and % Bias	34
Figure 2	Cesium-137 Performance Evaluation Results and % Bias	35
Figure 3	Tritium Performance Evaluation Results and % Bias.....	36
Figure 4	Strontium-90 Performance Evaluation Results and % Bias.....	37
Figure 5	Gross Alpha Performance Evaluation Results and % Bias.....	38
Figure 6	Gross Beta Performance Evaluation Results and % Bias	39
Figure 7	Iodine-131 Performance Evaluation Results and % Bias	40
Figure 8	Americium-241 Performance Evaluation Results and % Bias	41
Figure 9	Plutonium-238 Performance Evaluation Results and % Bias	42

2020 ANNUAL QUALITY ASSURANCE REPORT FOR THE RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM (REMP)

1. Introduction

GEL Laboratories, LLC (GEL) is a privately owned environmental laboratory dedicated to providing personalized client services of the highest quality. GEL was established as an analytical testing laboratory in 1981. Now a full service lab, our analytical divisions use state of the art equipment and methods to provide a comprehensive array of organic, inorganic, and radiochemical analyses to meet the needs of our clients.

At GEL, quality is emphasized at every level of personnel throughout the company. Management's ongoing commitment to good professional practice and to the quality of our testing services to our customers is demonstrated by their dedication of personnel and resources to develop, implement, assess, and improve our technical and management operations.

The purpose of GEL's quality assurance program is to establish policies, procedures, and processes to meet or exceed the expectations of our clients. To achieve this, all personnel that support these services to our clients are introduced to the program and policies during their initial orientation, and annually thereafter during company-wide training sessions.

GEL's primary goals are to ensure that all measurement data generated are scientifically and legally defensible, of known and acceptable quality per the data quality objectives (DQOs), and thoroughly documented to provide sound support for environmental decisions. In addition, GEL continues to ensure compliance with all contractual requirements, environmental standards, and regulations established by local, state and federal authorities.

GEL administers the QA program in accordance with the Quality Assurance Plan, GL-QS-B-001. Our Quality Systems include all quality assurance (QA) policies and quality control (QC) procedures necessary to plan, implement, and assess the work we perform. GEL's QA Program establishes a quality management system (QMS) that governs all of the activities of our organization.

This report entails the quality assurance program for the proficiency testing and environmental monitoring aspects of GEL for 2020. GEL's QA Program is designed to monitor the quality of analytical processing associated with environmental, radiobioassay, effluent (10 CFR Part 50), and waste (10 CFR Part 61) sample analysis.

This report covers the category of Radiological Environmental Monitoring Program (REMP) and includes:

- Intra-laboratory QC results analyzed during 2020.
- Inter-laboratory QC results analyzed during 2020 where known values are available.

2. Quality Assurance Programs for Inter-laboratory, Intra-laboratory and Third Party Cross-Check

In addition to internal and client audits, our laboratory participates in annual performance evaluation studies conducted by independent providers. We routinely participate in the following types of performance audits:

- Proficiency testing and other inter-laboratory comparisons

- Performance requirements necessary to retain certifications
- Evaluation of recoveries of certified reference and in-house secondary reference materials using statistical process control data.
- Evaluation of relative percent difference between measurements through SPC data.

We also participate in a number of proficiency testing programs for federal and state agencies and as required by contracts. It is our policy that no proficiency evaluation samples be analyzed in any special manner. Our annual performance evaluation participation generally includes a combination of studies that support the following:

- US Environmental Protection Agency Discharge Monitoring Report, Quality Assurance Program (DMR-QA). Annual national program sponsored by EPA for laboratories engaged in the analysis of samples associated with the NPDES monitoring program. Participation is mandatory for all holders of NPDES permits. The permit holder must analyze for all of the parameters listed on the discharge permit. Parameters include general chemistry, metals, BOD/COD, oil and grease, ammonia, nitrates, etc.
- Department of Energy Mixed Analyte Performance Evaluation Program (MAPEP). A semiannual program developed by DOE in support of DOE contractors performing waste analyses. Participation is required for all laboratories that perform environmental analytical measurements in support of environmental management activities. This program includes radioactive isotopes in water, soil, vegetation and air filters.
- ERA's MRAD-Multimedia Radiochemistry Proficiency test program. This program is for labs seeking certification for radionuclides in wastewater and solid waste. The program is conducted in strict compliance with USEPA National Standards for Water Proficiency study.
- ERA's InterLaB RadCheM Proficiency Testing Program for radiological analyses. This program completes the process of replacing the USEPA EMSL-LV Nuclear Radiation Assessment Division program discontinued in 1998. Laboratories seeking certification for radionuclide analysis in drinking water also use the study. This program is conducted in strict compliance with the USEPA National Standards for Water Proficiency Testing Studies. This program encompasses Uranium by EPA method 200.8 (for drinking water certification in Utah/Primary NELAP), gamma emitters, Gross Alpha/Beta, Iodine-131, naturally occurring radioactive isotopes, Strontium-89/90, and Tritium.
- ERA's Water Pollution (WP) biannual program for waste methodologies includes parameters for both organic and inorganic analytes.
- ERA's Water Supply (WS) biannual program for drinking water methodologies includes parameters for organic and inorganic analytes.
- Environmental Cross-Check Program administered by Eckert & Ziegler Analytics, Inc. This program encompasses radionuclides in water, soil, milk, naturally occurring radioactive isotopes in soil and air filters.

GEL procures single-blind performance evaluation samples from Eckert & Ziegler Analytics to verify the analysis of sample matrices processed at GEL. Samples are received on a quarterly basis. GEL's Third-Party Cross-Check Program provides environmental matrices encountered in a typical nuclear utility REMP. The Third-Party Cross-Check Program is intended to meet or exceed the inter-laboratory comparison program requirements discussed in NRC Regulatory Guide 4.15. Once performance evaluation samples have been prepared in accordance with the instructions provided by the PT provider, samples are managed and analyzed in the same manner as environmental samples from GEL's clients.

3. Quality Assurance Program for Internal and External Audits

During each annual reporting period, at least one internal assessment of each area of the laboratory is conducted in accordance with the pre-established schedule from Standard Operating Procedure for the Conduct of Quality Audits, GL-QS-E-001. The annual internal audit plan is reviewed for adequacy and includes the scheduled frequency and scope of quality control actions necessary to GEL's QA program. Internal audits are conducted at least annually in accordance with a schedule approved by the Quality Systems Director. Supplier audits are contingent upon the categorization of the supplier, and may or may not be conducted prior to the use of a supplier or subcontractor. Type I suppliers and subcontractors, regardless of how they were initially qualified, are re-evaluated at least once every three years.

In addition, prospective customers audit GEL during pre-contract audits. GEL hosts several external audits each year for both our clients and other programs. These programs include environmental monitoring, waste characterization, and radiobioassay. The following list of programs may audit GEL at least annually or up to every three years depending on the program.

- TNI, The NELAC Institute, National Environmental Laboratory Accreditation Program
- DOECAP, U.S. Department of Energy Consolidated Audit Program
- DOELAP, U.S. Department of Energy Laboratory Accreditation Program
- DOE QSAS, U.S. Department of Energy, Quality Systems for Analytical Services
- ISO/IEC 17025:2005
- A2LA, American Association for Laboratory Accreditation
- DoD ELAP, US Department of Defense Environmental Accreditation Program
- NUPIC, Nuclear Procurement Issues Committee
- South Carolina Department of Health and Environmental Control (SC DHEC)

The annual radiochemistry laboratory internal audit (20-RAD-001) was conducted in August and September, 2020. There were no findings or observations and two recommendations for improvements from this assessment.

4. Performance Evaluation Acceptance Criteria for Environmental Sample Analysis

GEL utilized an acceptance protocol based upon two performance models. For those inter-laboratory programs that already have established performance criteria for bias (i.e., MAPEP, and ERA/ELAP), GEL will utilize the criteria for the specific program. For intra-laboratory or third party quality control programs that do not have a specific acceptance criteria (i.e. the Eckert-Ziegler Analytics Environmental Cross-check Program), results will be evaluated in accordance with GEL's internal acceptance criteria.

5. Performance Evaluation Samples

Performance Evaluation (PE) results and internal quality control sample results are evaluated in accordance with GEL acceptance criteria. The first criterion concerns bias, which is defined as the deviation of any one result from the known value. The second criterion concerns precision, which deals with the ability of the measurement to be replicated by comparison of an individual result with the mean of all results for a given sample set.

At GEL, we also evaluate our analytical performance on a regular basis through statistical process control (SPC) acceptance criteria. Where feasible, this criterion is applied to both measures of precision and accuracy and is specific to sample matrix. We establish environmental process control limits at least annually.

For Radiochemistry analysis, quality control evaluation is based on static limits rather than those that are statistically derived. Our current process control limits are maintained in GEL's AlphaLIMS. We also measure precision with matrix duplicates and/or matrix spike duplicates. The upper and lower control limits (UCL and LCL respectively) for precision are plus or minus three times the standard deviation from the mean of a series of relative percent differences. The static precision criteria for radiochemical analyses are 0 - 20%, for activity levels exceeding the contract required detection limit (CRDL).

6. Quality Control Program for Environmental Sample Analysis

GEL's internal QA Program is designed to include QC functions such as instrumentation calibration checks (to insure proper instrument response), blank samples, instrumentation backgrounds, duplicates, as well as overall staff qualification analyses and statistical process controls. Both quality control and qualification analyses samples are used to be as similar as the matrix type of those samples submitted for analysis by the various laboratory clients. These performance test samples (or performance evaluation samples) are either actual sample submitted in duplicate in order to evaluate the precision of laboratory measurements, or fortified blank samples, which have been given a known quantity of a radioisotope that is in the interest to GEL's clients.

Accuracy (or Bias) is measured through laboratory control samples and/or matrix spikes, as well as surrogates and internal standards. The UCLs and LCLs for accuracy are plus or minus three times the standard deviation from the mean of a series of recoveries. The static limit for most radiochemical analyses is 75 - 125%. Specific instructions for out-of-control situations are provided in the applicable analytical SOP.

GEL's Laboratory Control Standard (LCS) is an aliquot of reagent water or other blank matrix to which known quantities of the method analytes are added in the laboratory. The LCS is analyzed exactly like a sample, and its purpose is to determine whether the methodology is in control, and whether the laboratory is capable of making accurate and precise measurements. Some methods may refer to these samples as Laboratory Fortified Blanks (LFB). The requirement for recovery is between 75% and 125% for radiological analyses excluding drinking water matrix.

$$\text{Bias (\%)} = \frac{(\text{observed concentration})}{(\text{known concentration})} * 100 \%$$

Precision is a data quality indicator of the agreement between measurements of the same property, obtained under similar conditions, and how well they conform to themselves. Precision is usually expressed as standard deviation, variance or range in either absolute or relative (percentage) terms.

GEL's laboratory duplicate (DUP or LCSD) is an aliquot of a sample taken from the same container and processed in the same manner under identical laboratory conditions. The aliquot is analyzed independently from the parent sample and the results are compared to measure precision and accuracy.

If a sample duplicate is analyzed, it will be reported as Relative Percent Difference (RPD). The RPD must be 20 percent or less, if both samples are greater than 5 times the MDC. If both results are less than 5 times MDC, then the RPD must be equal to or less than 100%. If one result is above the MDC and the other is below the MDC, then the RPD can be calculated using the MDC for the result of the one below the MDC. The RPD must be 100% or less. In the situation where both results are above the MDC but one result is greater than 5 times the MDC and the other is less than 5 times the MDC, the RPD must be less than or equal to 20%. If both results are below MDC, then the limits on % RPD are not applicable.

$$\text{Difference (\%)} = \frac{(\text{high duplicate result} - \text{low duplicate result})}{(\text{average of results})} * 100 \%$$

7. Summary of Data Results

During 2020, forty-five (45) radioisotopes associated with seven (7) matrix types were analyzed under GEL's Performance Evaluation program in participation with ERA, MAPEP, and Eckert & Ziegler Analytics. Matrix types were representative of client analyses performed during 2020. Of the four hundred fifty-six (456) total results, 97.1% (443 of 456) were found to be acceptable within the PT providers three sigma or other statistical criteria. The list below contains the type of matrix evaluated by GEL.

- Air Filter
- Cartridge
- Water
- Milk
- Soil
- Liquid
- Vegetation

Graphs are provided in Figures 1-9 of this report to allow for the evaluation of trends or biases. These graphs include radioisotopes Cobalt-60, Cesium-137, Tritium, Strontium-90, Gross Alpha, Gross Beta, Iodine-131, Americium-241, and Plutonium-238.

8. Summary of Participation in the Eckert & Ziegler Analytics Environmental Cross-Check Program

Eckert & Ziegler Analytics provided samples for ninety-one (91) individual environmental analyses. The accuracy of each result reported to Eckert & Ziegler Analytics, Inc. is measured by the ratio of GEL's result to the known value. All results fell within GEL's acceptance criteria (100% within acceptance).

9. Summary of Participation in the MAPEP Monitoring Program

MAPEP Series 42 and 43 were analyzed by the laboratory. Of the one hundred twenty-eight (128) analyses, 99% (127 out of 128) fell within the PT provider's acceptance criteria.

10. Summary of Participation in the ERA MRaD PT Program

The ERA MRaD program provided samples (MRAD-32 and MRAD-33) for one hundred ninety-eight (198) individual environmental analyses. Of the 198 analyses, 98% (194 out of 198) fell within the PT provider's acceptance criteria.

11. Summary of Participation in the ERA PT Program

The ERA program provided samples (RAD-120, RAD-121, and RAD-122) for forty (40) individual environmental analyses. Of the 40 analyses, 80% (32 out of 40) fell within the PT provider's acceptance criteria.

All corrective actions are summarized in Table 8.

12. Corrective Action Request and Report (CARR)

There are two categories of corrective action at GEL. One is corrective action implemented at the analytical and data review level in accordance with the analytical SOP. The other is formal corrective action documented by the Quality Systems Team in accordance with GL-QS-E-002. A formal corrective action is initiated when a nonconformance reoccurs or is so significant that permanent elimination or prevention of the problem is required. Formal corrective action investigations include root cause analysis.

GEL includes quality requirements in most analytical standard operating procedures to ensure that data are reported only if the quality control criteria are met or the quality control measures that did not meet the acceptance criteria are documented. A formal corrective action is implemented according to GL-QS-E-002 for Conducting Corrective/Preventive Action and Identifying Opportunities for Improvement. Recording and documentation is performed following guidelines stated in GL-QS-E-012 for Client NCR Database Operation.

Any employee at GEL can identify and report a nonconformance and request that corrective action be taken. Any GEL employee can participate on a corrective action team as requested by the QS team or Group Leaders. The steps for conducting corrective action are detailed in GL-QS-E-002. In the event that correctness or validity of the laboratory's test results in doubt, the laboratory will take corrective action. If investigations show that the results have been impacted, affected clients will be informed of the issue in writing within five (5) calendar days of the discovery.

Table 8 provides the status of CARRs for radiological performance testing during 2020. **It has been determined that causes of the unacceptable results did not impact any data reported to our clients.**

- CARR200224-1274 of PT Failures in RAD-120 for Drinking Water Sr-89, H-3, I-131
- CARR 200902-1278 of PT Failure in MRAD – 32 for: U-238 filter, Total U (mass) filter, U-234 water, Total U water
- CARR 200902-1287 of PT Failure in RAD-122 in drinking water for: Ba-133 and Co-60
- CARR 201214-1296 of PT Failure in MAPEP 43: Fe-55 in soil

13. References

1. GEL Quality Assurance Plan, GL-QS-B-001
2. GEL Standard Operating Procedure for the Conduct of Quality Audits, GL-QS-E-001
3. GEL Standard Operating Procedure for Conducting Corrective/Preventive Action and Identifying Opportunities for Improvement, GL-QS-E-002
4. GEL Standard Operating Procedure for AlphaLIMS Documentation of Nonconformance Reporting and Dispositioning and Control of Nonconforming Items, GL-QS-E-004
5. GEL Standard Operating Procedure for Handling Proficiency Evaluation Samples, GL-QS-E-013
6. GEL Standard Operating Procedure for Quality Assurance Measurement Calculations and Processes, GL-QS-E-014
7. 40 CFR Part 136 Guidelines Establishing Test Procedures for the Analysis of Pollutants
8. ISO/IEC 17025-2017, General Requirements for the Competence of Testing and Calibration Laboratories
9. ANSI/ASQC E4-1994, Specifications and Guidelines for Quality Systems for Environmental Data Collection and Environmental Technology Programs, American National Standard
10. 2003 NELAC Standard, National Environmental Laboratory Accreditation Program
11. 2009 TNI Standard, The NELAC Institute, National Environmental Accreditation Program
12. MARLAP, Multi-Agency Radiological Laboratory Analytical Protocols
13. 10 CFR Part 21, Reporting of Defects and Noncompliance
14. 10 CFR Part 50 Appendix B, Quality Assurance Criteria for Nuclear Power Plants and Fuel Reprocessing Plants
15. 10 CFR Part 61, Licensing Requirements for Land Disposal and Radioactive Waste
16. NRC REG Guide 4.15 and NRC REG Guide 4.8

TABLE 1
2020 RADIOLOGICAL PROFICIENCY TESTING RESULTS AND ACCEPTANCE CRITERIA

PT Provider	Quarter / Year	Report Closing / Received Date	Sample Number	Sample Media	Units	Analyte	Reported Value	Assigned Value	Acceptance Limits	Performance Evaluation
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Barium-133	59.2	64.5	53.7 - 71.0	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Cesium-134	21.5	22.9	17.5 - 25.6	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Cesium-137	217	220	198 - 244	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Cobalt-60	97.7	91.2	82.1 - 103	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Zinc-65	332	298	268 - 348	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Gross Alpha	67.1	58.9	30.8 - 73.3	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Gross Alpha	55.4	58.9	30.8 - 73.3	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Gross Beta	20	21	12.6 - 29.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Radium-226	15.6	17.4	12.9 - 19.9	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Radium-228	5.71	7.95	5.06 - 10.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Radium-228	5.68	7.95	5.06 - 10.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Uranium (Nat)	64.8	68.2	55.7 - 75.0	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Tritium	15200	17800	15600 - 19600	Not Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Tritium	17700	17800	15600 - 19600	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Strontium-89	73.3	59.3	47.6 - 67.1	Not Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Strontium-89	70.8	59.3	47.6 - 67.1	Not Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Strontium-90	38.3	36.5	26.8 - 42.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Strontium-90	30.6	36.5	26.8 - 42.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Iodine-131	23.7*	29.9	24.9 - 34.9	Not Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Iodine-131	31.8	29.9	24.9 - 34.9	Acceptable
EZA	1st/2020	05/08/20	E13167	Cartridge	pCi	Iodine-131	9.37E+01	9.12E+01	1.03	Acceptable
EZA	1st/2020	05/08/20	E13168	Milk	pCi/L	Strontium-89	9.15E+01	9.55E+01	0.96	Acceptable
EZA	1st/2020	05/08/20	E13168	Milk	pCi/L	Strontium-90	1.51E+02	1.43E+02	0.62	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cerium-141	1.99E+02	1.84E+02	1.08	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cobalt-58	1.96E+02	1.89E+02	1.03	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cobalt-60	2.33E+02	2.29E+02	1.02	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Chromium-51	3.84E+02	3.76E+02	1.02	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cesium-134	1.36E+02	1.49E+02	0.91	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cesium-137	1.91E+02	1.80E+02	1.06	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Manganese-54	2.31E+02	2.10E+02	1.1	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Iron-59	1.82E+02	1.63E+02	1.12	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Zinc-65	2.69E+02	2.52E+02	1.07	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cerium-141	2.11E+02	1.90E+02	1.11	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cesium-134	1.53E+02	1.54E+02	0.99	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cesium-137	2.08E+02	1.85E+02	1.12	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Chromium-51	4.34E+02	3.88E+02	1.12	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cobalt-58	2.21E+02	1.96E+02	1.13	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cobalt-60	2.59E+02	2.36E+02	1.10	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Iodine-131	1.02E+02	9.29E+01	1.1	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Iron-59	1.79E+02	1.68E+02	1.06	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Manganese-54	2.48E+02	2.16E+02	1.15	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Zinc-65	3.05E+02	2.61E+02	1.17	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Actinium-228	3200	3170	2090 - 3990	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Actinium-228	3200	3170	2090 - 3990	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Americium-241	1410	1730	934 - 2450	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Bismuth-212	3160	3280	939 - 4890	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Bismuth-212	3160	3280	939 - 4890	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Bismuth-214	1870	2270	1090 - 3380	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Bismuth-214	1870	2270	1090 - 3380	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cesium-134	5040	6200	4240 - 7410	Acceptable

ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cesium-134	5040	6200	4240 - 7410	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cesium-137	6830	7280	5510 - 9210	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cesium-137	6830	7280	5510 - 9210	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cobalt-60	4840	5170	4070 - 6380	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cobalt-60	4840	5170	4070 - 6380	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Lead-212	3580	3280	2290 - 4150	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Lead-212	3580	3280	2290 - 4150	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Lead-214	2380	2330	979 - 3660	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Lead-214	2380	2330	979 - 3660	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Manganese-54	<25.4	<1000	<1000	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Manganese-54	<25.4	<1000	<1000	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Plutonium-238	951	1010	504 - 1540	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Plutonium-239	1020	1240	676 - 1780	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Potassium-40	26000	24700	17000 - 29500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Potassium-40	26000	24700	17000 - 29500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Strontium-90	1980	2550	794 - 3970	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Strontium-90	1980	2550	794 - 3970	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Strontium-90	1980	2550	794 - 3970	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Thorium-234	5090	4010	1510 - 6870	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Thorium-234	5090	4010	1510 - 6870	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-234	3330	3600	1690 - 4720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-234	3910	3600	1690 - 4720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-238	3490	3570	1960 - 4790	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-238	2950	3570	1960 - 4790	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-Total	6980	7340	4070 - 9490	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-Total	6995	7340	4070 - 9490	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	µg/kg	Uranium-Total (mass)	10500	10700	4830 - 14400	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	µg/kg	Uranium-Total (mass)	8830	10700	4830 - 14400	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Zinc-65	1070	1100	879 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Zinc-65	1070	1100	879 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Americium-241	3470	3950	2440 - 5580	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cesium-134	1780	2150	1430 - 2860	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cesium-134	1780	2150	1430 - 2860	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cesium-137	942	1030	792 - 1390	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cesium-137	942	1030	792 - 1390	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cobalt-60	987	997	783 - 1300	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cobalt-60	987	997	783 - 1300	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Curium-244	881	1050	592 - 1310	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Manganese-54	<39.6	<300	<300	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Manganese-54	<39.6	<300	<300	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Plutonium-238	1070	1150	796 - 1480	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Plutonium-239	227	232	160 - 294	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Potassium-40	35700	39300	29500 - 49800	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Potassium-40	35700	39300	29500 - 49800	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Strontium-90	1720	1720	970 - 2240	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Strontium-90	1720	1720	970 - 2240	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Strontium-90	1720	1720	970 - 2240	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Uranium-234	1750	1900	1330 - 2420	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Uranium-238	1780	1880	1330 - 2350	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Uranium-Total	3620	3870	2470 - 5220	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	µg/kg	Uranium-Total (mass)	5330	5640	4330 - 6990	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Zinc-65	2740	2750	2050 - 4080	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Zinc-65	2740	2750	2050 - 4080	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Americium-241	64.9	74.7	53.3 - 99.6	Acceptable

ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cesium-134	1360	1390	902 - 1700	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cesium-134	1360	1390	902 - 1700	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cesium-137	370	351	288 - 460	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cesium-137	370	351	288 - 460	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cobalt-60	459	422	359 - 536	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cobalt-60	459	422	359 - 536	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Iron-55	1150	1260	460 - 2010	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Manganese-54	<3.87	<50.0	<50.0	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Manganese-54	<3.87	<50.0	<50.0	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Plutonium-238	21.9	28	21.1 - 34.4	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Plutonium-239	30.6	40.1	30.0 - 48.4	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Strontium-90	181	175	111 - 238	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-234	45.7	56.2	41.7 - 65.9	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-234	46.7	56.2	41.7 - 65.9	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-238	46	55.7	42.1 - 66.5	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-238	39.6	55.7	42.1 - 66.5	Not Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-Total	94.5	114	83.2 - 135	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-Total	88.1	114	83.2 - 135	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	µg/Filter	Uranium-Total (mass)	138	167	134 - 196	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	µg/Filter	Uranium-Total (mass)	118	167	134 - 196	Not Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Zinc-65	798	694	569 - 1060	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Zinc-65	798	694	569 - 1060	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Gross Alpha	34.4	29.3	15.3 - 48.3	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Gross Beta	61.1	66.4	40.3 - 100	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Americium-241	47.9	45.3	31.1 - 57.9	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-134	1420	1520	1150 - 1670	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-134	1420	1520	1150 - 1670	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-134	1420	1520	1150 - 1670	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-137	2440	2390	2050 - 2720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-137	2440	2390	2050 - 2720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-137	2440	2390	2050 - 2720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cobalt-60	2890	2760	2380 - 3170	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cobalt-60	2890	2760	2380 - 3170	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cobalt-60	2890	2760	2380 - 3170	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Iron-55	140	152	89.3 - 221	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Manganese-54	<6.25	<100	<100	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Manganese-54	<6.25	<100	<100	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Manganese-54	<6.25	<100	<100	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Plutonium-238	32.5	36.4	21.9 - 47.2	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Plutonium-239	29.7	33.6	20.8 - 41.4	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Strontium-90	426	447	322 - 552	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-234	187	186	142 - 213	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-234	226*	186	142 - 213	Not Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-238	191	184	143 - 217	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-238	199	184	143 - 217	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-Total	387	378	295 - 431	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-Total	434.3*	378	295 - 431	Not Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	µg/L	Uranium-Total (mass)	572	551	446 - 625	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	µg/L	Uranium-Total (mass)	595	551	446 - 625	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Zinc-65	1330	1190	1060 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Zinc-65	1330	1190	1060 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Zinc-65	1330	1190	1060 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Gross Alpha	67.6	165	60.2 - 228	Acceptable

ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Gross Alpha	67.6	165	60.2 - 228	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Gross Beta	143	158	79.0 - 217	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Gross Beta	143	158	79.0 - 217	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Tritium	5990	6280	4730 - 7640	Acceptable
ERA	2nd/2020	05/26/20	RAD-121	Water	pCi/L	Tritium	13100	14100	12300 - 15500	Acceptable
ERA	2nd/2020	05/26/20	RAD-121	Water	pCi/L	Strontium-89	68.8	60.1	48.3 - 67.9	Not Acceptable
ERA	2nd/2020	05/26/20	RAD-121	Water	pCi/L	Strontium-89	71.6	60.1	48.3 - 67.9	Not Acceptable
ERA	2nd/2020	05/26/20	RAD-121	Water	pCi/L	Iodine-131	27.5	28.9	24.1 - 33.8	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-GrF42	Filter	Bq/sample	Gross alpha	0.79	1.24	0.37-2.11	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-GrF42	Filter	Bq/sample	Gross beta	1.84	2.00	1.00-3.00	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-GrW42	Water	Bq/L	Gross alpha	1.01	1.03	0.31-1.75	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-GrW42	Water	Bq/L	Gross beta	4.18	4.24	2.12-6.36	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Americium-241	43.0	40.9	28.6-53.2	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Cesium-134	984	1114	780-1448	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Cesium-137	1060	1020	714-1326	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Cobalt-57	1200.000	1071	750-1392	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Cobalt-60	0.366		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Iron-55	950.0	1096	767-1425	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Manganese-54	961	945	662-1229	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Nickel-63	-0.727		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Plutonium-238	38.0	41.8	29.3-54.3	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Plutonium-239/240	38.0	41.8	29.3-54.3	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Potassium-40	618	625	438-813	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Strontium-90	286	340	238-442	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Technetium-99	728	706	494-918	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	U-234/233	43.2	40.3	28.2-52.4	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Uranium-238	64.6	68.0	48-88	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Zinc-65	784	751	526-976	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Americium-241	0.545	0.547	0.383-0.711	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Cesium-134	17.0	18.5	13.0-24.1	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Cesium-137	12.0	11.3	7.9-14.7	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Cobalt-57	19.7	19.7	13.8-25.6	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Cobalt-60	11.0	10.6	7.4-13.8	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Hydrogen-3	193	196	137-255	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Iron-55	18.2	17.8	12.5-23.1	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Manganese-54	20.6	19.6	13.7-25.5	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Nickel-63	14.1	11.1	7.8-14.4	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Plutonium-238	0.822	0.940	0.66-1.22	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Plutonium-239/240	0.686	0.737	0.516-0.958	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Potassium-40	-0.0485		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Radium-226	0.366	0.365	0.256-0.475	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Strontium-90	0.0122		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Technetium-99	3.72	3.63	2.54-4.72	Acceptable

MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Uranium-234	1.02	0.97	0.68-1.26	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Uranium-238	0.98	0.95	0.67-1.24	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Zinc-65	23.9	22.2	15.5-28.9	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-XaW42	Alk. Water	Bq/L	Iodine-129	1.01	1.001	0.701-1.301	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	ug/sample	Uranium-235	0.0438	0.0460	0.0322-0.0598	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	ug/sample	Uranium-238	6.39	6.3	4.4-8.2	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	ug/sample	Uranium-Total	6.43	6.3	4.4-8.2	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Americium-241	0.0671	0.0675	0.0473-0.0878	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Cesium-134	0.626	0.600	0.420-0.780	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Cesium-137	0.802	0.735	0.515-0.956	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Cobalt-57	1.54	1.50	1.05-1.95	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Cobalt-60	1.29	1.23	0.86-1.60	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Manganese-54	0.0065		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Plutonium-238	0.0341	0.0348	0.0244-0.0452	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Plutonium-239/240	0.0395	0.0379	0.0265-0.0493	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Strontium-90	0.884	0.97	0.68-1.26	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Uranium-234	0.0788	0.075	0.053-0.098	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Uranium-238	0.0801	0.078	0.055-0.101	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Zinc-65	1.43	1.18	0.83-1.53	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Americium-241	0.0761	0.075	0.053-0.098	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Cesium-134	3.55	3.82	2.67-4.97	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Cesium-137	2.83	2.77	1.94-3.60	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Cobalt-57	0.00561		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Cobalt-60	2.84	2.79	1.95-3.63	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Manganese-54	4.74	4.58	3.21-5.95	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Plutonium-238	0.0447	0.0472	0.0330-0.0614	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Plutonium-239/240	0.06950	0.0772	0.0540-0.1004	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Strontium-90	0.361	0.492	0.344-0.640	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Uranium-234	0.1070	0.102	0.071-0.133	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Uranium-238	0.1150	0.103	0.072-0.134	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Zinc-65	4.14	3.79	2.65-4.93	Acceptable
EZA	2nd/2020	07/31/20	E13171	Cartridge	pCi	Iodine-131	9.68E+01	9.19E+01	1.05	Acceptable
EZA	2nd/2020	07/31/20	E13172	Milk	pCi/L	Strontium-89	8.67E+01	8.81E+01	0.98	Acceptable
EZA	2nd/2020	07/31/20	E13172	Milk	pCi/L	Strontium-90	1.06E+01	1.27E+01	0.83	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cerium-141	1.29E+02	1.16E+02	1.11	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cobalt-58	1.04E+02	1.00E+02	1.03	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cobalt-60	2.00E+02	1.95E+02	1.02	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Chromium-51	2.91E+02	2.56E+02	1.14	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cesium-134	1.40E+02	1.46E+02	0.96	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cesium-137	1.09E+02	1.04E+02	1.05	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Iron-59	1.09E+02	1.01E+02	1.08	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Iodine-131	8.31E+01	8.15E+01	1.02	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Manganese-54	1.41E+02	1.34E+02	1.05	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Zinc-65	2.48E+02	2.25E+02	1.10	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cerium-141	1.23E+02	1.17E+02	1.05	Acceptable

EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cobalt-58	1.05E+02	1.02E+02	1.03	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cobalt-60	2.05E+02	1.98E+02	1.04	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Chromium-51	2.76E+02	2.59E+02	1.06	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cesium-134	1.36E+02	1.48E+02	0.92	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cesium-137	1.04E+02	1.05E+02	0.99	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Iron-59	1.05E+02	1.02E+02	1.03	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Iodine-131	9.10E+01	8.05E+01	1.13	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Manganese-54	1.47E+02	1.35E+02	1.09	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Zinc-65	2.49E+02	2.27E+02	1.10	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Barium-133	64.7	58.6	48.6 - 64.6	Not Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Cesium-134	23	22.3	17.0 - 25.0	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Cesium-137	76.5	73	65.7 - 83.0	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Cobalt-60	97.9	86.1	77.5 - 97.0	Not Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Zinc-65	96.3	82.9	74.6 - 99.6	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Gross Alpha	54.3	52.4	27.3 - 65.6	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Gross Beta	24.7	24.3	15.0 - 32.3	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Radium-226	9.42	10.8	8.08 - 12.5	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Radium-228	5.55	5.42	3.28 - 7.19	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Uranium (Nat)	28.9	29.3	23.7 - 32.5	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Uranium (Nat) mass	41.3	42.7	34.5 - 47.4	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Tritium	17800	20300	17800 - 22300	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	µg/L	Tritium	20200	20300	17800 - 22300	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Strontium-89	61.7	68.9	56.2 - 77.1	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Strontium-90	18.2	19.5	13.9 - 23.1	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Iodine-131	29.9	26.1	21.7 - 30.8	Acceptable
EZA	3rd/2020	11/10/20	E13175	Cartridge	pCi	Iodine-131	7.96E+01	7.67E+01	1.04	Acceptable
EZA	3rd/2020	11/10/20	E13176	Milk	pCi/L	Strontium-89	1.13E+02	9.54E+01	1.18	Acceptable
EZA	3rd/2020	11/10/20	E13176	Milk	pCi/L	Strontium-90	9.47E+01	1.28E+02	0.74	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cerium-141	1.47E+02	1.50E+02	0.98	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cobalt-58	1.81E+02	1.80E+02	1.01	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cobalt-60	3.85E+02	3.79E+02	1.02	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Chromium-51	4.11E+02	3.72E+02	1.10	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cesium-134	1.82E+02	2.00E+02	0.91	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cesium-137	2.58E+02	2.50E+02	1.03	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Iron-59	2.29E+02	2.00E+02	1.14	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Iodine-131	9.49E+01	9.50E+01	1.00	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Manganese-54	1.96E+02	1.80E+02	1.09	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Zinc-65	3.04E+02	2.70E+02	1.13	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cerium-141	1.58E+02	1.51E+02	1.05	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cobalt-58	1.90E+02	1.80E+02	1.05	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cobalt-60	4.04E+02	3.80E+02	1.06	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Chromium-51	3.45E+02	3.73E+02	0.92	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cesium-134	1.81E+02	2.01E+02	0.9	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cesium-137	2.63E+02	2.51E+02	1.05	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Iron-59	2.26E+02	2.01E+02	1.12	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Iodine-131	9.80E+01	9.82E+01	1.00	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Manganese-54	2.06E+02	1.81E+02	1.14	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Zinc-65	3.02E+02	2.71E+02	1.12	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Actinium-228	3530	3290	2170 - 4150	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Americium-241	780	677	366 - 959	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Bismuth-212	3780	3290	942 - 4900	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Bismuth-214	2970	3790	1820 - 5640	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Cesium-134	3760	4180	2860 - 5000	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Cesium-137	6890	6940	5250 - 8780	Acceptable

ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Cobalt-60	2280	2520	1980 - 3110	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Lead-214	3680	4080	1710 - 6410	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Lead-214	3720	4080	1710 - 6410	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Manganese-54	<23.9	<1000	<1000	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Plutonium-238	1460	1670	833 - 2540	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Potassium-40	24600	24700	17000 - 29500	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Strontium-90	5110	4980	1550 - 7760	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Thorium-234	5370	4740	1790 - 8120	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-234	4550	4780	2240 - 6260	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-234	5100	4780	2240 - 6260	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-238	4800	4740	2600 - 6360	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-238	4870	4740	2600 - 6360	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-Total	9590	9730	5400 - 12600	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-Total	10189	9730	5400 - 12600	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	µg/kg	Uranium-Total (mass)	14400	14200	6410 - 19200	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	µg/kg	Uranium-Total (mass)	14600	14200	6410 - 19200	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Zinc-65	1220	1120	895 - 1530	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Americium-241	2680	2940	1820 - 4150	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Cesium-134	862	945	627 - 1260	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Cesium-137	735	823	633 - 1110	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Cobalt-60	663	691	542 - 903	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Curium-244	3100	3400	1920 - 4230	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Manganese-54	<47.5	<300	<300	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Plutonium-238	4470	4590	3180 - 5920	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Plutonium-239	838	768	531 - 972	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Potassium-40	33500	34500	25900 - 43700	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Strontium-90	8790	8690	4900 - 11300	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Uranium-234	2650	2920	2050 - 3720	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Uranium-238	2720	2900	2050 - 3630	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Uranium-Total	5510	5950	3800 - 8020	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	µg/kg	Uranium-Total (mass)	8150	8680	6660 - 10800	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Zinc-65	1640	1580	1180 - 2340	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Americium-241	22.3	22.2	15.8 - 29.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Cesium-134	268	296	192 - 363	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Cesium-137	407	413	339 - 542	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Cobalt-60	507	497	422 - 631	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Iron-55	361	407	149 - 649	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Manganese-54	<3.82	<50.0	<50.0	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Plutonium-238	25.3	28.8	21.7 - 35.4	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Plutonium-239	31	33.7	25.2 - 40.7	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Strontium-90	30.5	36.2	22.9 - 49.3	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-234	16.5	18.3	13.6 - 21.4	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-234	19.5	18.3	13.6 - 21.4	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-238	18.5	18.1	13.7 - 21.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-238	18.2	18.1	13.7 - 21.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-Total	35.8	37.2	27.2 - 44.1	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	µg/Filter	Uranium-Total (mass)	55.3	54.3	43.6 - 63.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	µg/Filter	Uranium-Total (mass)	54.4	54.3	43.6 - 63.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Zinc-65	540	500	410 - 764	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Gross Alpha	32.2	26.1	13.6 - 43.0	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Gross Beta	94.2	85.9	52.1 - 130	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Americium-241	185	176	121 - 225	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Cesium-134	849	911	688 - 1000	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Cesium-137	1540	1510	1290 - 1720	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Cobalt-60	1660	1560	1350 - 1790	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Iron-55	267	298	175 - 433	Acceptable

ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Manganese-54	<4.61	<100	<100	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Plutonium-238	160	191	115 - 247	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Plutonium-239	81.7	100	61.9 - 123	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Strontium-90	917	787	567 - 973	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-234	33.8	35.2	26.8 - 40.3	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-234	39.2	35.2	26.8 - 40.3	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-238	34.7	34.9	27.0 - 41.1	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-238	32.7	34.9	27.0 - 41.1	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-238	37.3	34.9	27.0 - 41.1	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-Total	70.4	71.8	56.0 - 81.9	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-Total	78.2	71.8	56.0 - 81.9	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	µg/L	Uranium-Total (mass)	104	105	85.0 - 119	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	µg/L	Uranium-Total (mass)	112	105	85.0 - 119	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Zinc-65	1010	917	816 - 1160	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Gross Alpha	100	111	40.5 - 153	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Gross Beta	181	194	97.0 - 267	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Tritium	11600	12000	9040 - 14600	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Americium-241	1.2		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Cesium-134	625	710	497-923	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Cesium-137	0.87		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Cobalt-57	1260	1100	770-1430	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Cobalt-60	998	1000	700-1300	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Iron-55	811	577	404-750	Not Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Manganese-54	661	610	427-793	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Nickel-63	840	980	686-1274	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Plutonium-238	53.1	57.7	40.4-75	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Plutonium-239/240	68.1	79.0	55-103	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Potassium-40	704	622	435-809	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Strontium-90	434	487	341-633	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Technetium-99	5		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	U-234/233	51	48	33.7-62.5	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Uranium-238	126	128	90-166	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Zinc-65	531	470	329-611	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Americium-241	0.942	0.922	0.645-1.199	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Cesium-134	13.9	15.2	10.6-19.8	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Cesium-137	15.10	14.3	10.0-18.6	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Cobalt-57	-0.0072		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Cobalt-60	12.90	12.2	8.5-15.9	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Hydrogen-3	330	360	252-468	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Iron-55	29.20	32.9	23.0-42.8	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Manganese-54	-0.0032		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Nickel-63	-0.93		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Plutonium-238	0.6430	0.7040	0.493-0.915	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Plutonium-239/240	0.001	0.009	Sens. Evaluation	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Potassium-40	-0.763		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Radium-226	1.020	1.250	0.88-1.63	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Strontium-90	9.97	11.60	8.1-15.1	Acceptable

MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Technetium-99	8.720	9.40	6.6-12.2	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Uranium-234/233	1.27	1.26	0.88-1.64	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Uranium-238	1.31	1.30	0.9-1.7	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Zinc-65	18.9	16.9	11.8-22	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	ug/sample	Uranium-235	0.0920	0.1020	0.071-0.133	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	ug/sample	Uranium-238	13.1	14.6	10.2-19	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	ug/sample	Uranium-Total	13.2	14.7	10.3-19.1	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Americium-241	0.129	0.134	0.094-0.174	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Cesium-134	1.72	1.83	1.28-2.38	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Cesium-137	1.04	0.996	0.697-1.295	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Cobalt-57	0.00126		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Cobalt-60	1.85	1.73	1.21-2.25	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Manganese-54	1.64	1.40	0.98-1.82	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Plutonium-238	0.0917	0.0867	0.0607-0.1127	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Plutonium-239/240	0.0019	0.0017	Sens. Evaluation	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Strontium-90	1.790	2.080	1.46-2.70	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Uranium-234/233	0.1820	0.175	0.123-0.228	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Uranium-238	0.1860	0.182	0.127-0.237	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Zinc-65	2.29	2.00	1.40-2.60	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Americium-241	0.1040	0.103	0.072-0.134	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Cesium-134	4.5	4.94	3.46-6.42	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Cesium-137	0.0134		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Cobalt-57	6.70	6.67	4.67-8.67	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Cobalt-60	4.27	4.13	2.89-5.37	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Manganese-54	6.04	5.84	4.09-7.59	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Plutonium-238	0.0002	0.001	Sens. Evaluation	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Plutonium-239/240	0.05370	0.0624	0.0437-0.0811	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Strontium-90	1.07	1.39	0.97-1.81	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Uranium-234/233	0.1270	0.1150	0.081-0.150	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Uranium-238	0.1260	0.1200	0.084-0.156	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Zinc-65	7.04	6.38	4.47-8.29	Acceptable
EZA	4th/2020	2/1/2021	E13179	Cartridge	pCi	Iodine-131	7.58E+01	7.81E+01	0.97	Acceptable
EZA	4th/2020	2/1/2021	E13180	Milk	pCi/L	Strontium-89	8.41E+01	8.97E+01	0.94	Acceptable
EZA	4th/2020	2/1/2021	E13180	Milk	pCi/L	Strontium-90	1.13E+01	1.30E+01	0.87	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cerium-141	9.76E+01	1.00E+01	0.98	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cobalt-58	8.58E+01	8.43E+01	1.02	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cobalt-60	1.66E+02	1.52E+02	1.09	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Chromium-51	2.68E+02	2.53E+02	1.06	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cesium-134	1.03E+02	1.08E+02	0.96	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cesium-137	1.33E+02	1.27E+02	1.04	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Iron-59	1.28E+02	1.12E+02	1.14	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Iodine-131	9.44E+01	9.19E+01	1.08	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Manganese-54	1.49E+02	1.43E+02	1.04	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Zinc-65	2.17E+02	1.90E+02	1.14	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cerium-141	1.18E+02	1.06E+02	1.11	Acceptable

EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cobalt-58	9.54E+01	8.92E+01	1.07	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cobalt-60	1.74E+02	1.61E+02	1.08	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Chromium-51	3.05E+02	2.68E+02	1.14	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cesium-134	1.14E+02	1.14E+02	1.00	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cesium-137	1.37E+02	1.35E+02	1.02	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Iron-59	1.37E+02	1.19E+02	1.16	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Iodine-131	9.72E+01	9.57E+01	1.02	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Manganese-54	1.65E+02	1.51E+02	1.09	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Zinc-65	2.29E+02	2.01E+02	1.14	Acceptable

TABLE 2
2020 ECKERT & ZIEGLER ANALYTICS PERFORMANCE EVALUATION RESULTS

PT Provider	Quarter / Year	Report Received Date	Sample Number	Sample Media	Unit	Analyte / Nuclide	GEL Value	Known value	Acceptance Range/ Ratio	Evaluation
EZA	1st/2020	05/08/20	E13167	Cartridge	pCi	Iodine-131	9.37E+01	9.12E+01	1.03	Acceptable
EZA	1st/2020	05/08/20	E13168	Milk	pCi/L	Strontium-89	9.15E+01	9.55E+01	0.96	Acceptable
EZA	1st/2020	05/08/20	E13168	Milk	pCi/L	Strontium-90	1.51E+02	1.43E+02	0.62	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cerium-141	1.99E+02	1.84E+02	1.08	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cobalt-58	1.96E+02	1.89E+02	1.03	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cobalt-60	2.33E+02	2.29E+02	1.02	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Chromium-51	3.84E+02	3.76E+02	1.02	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cesium-134	1.36E+02	1.49E+02	0.91	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Cesium-137	1.91E+02	1.80E+02	1.06	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Manganese-54	2.31E+02	2.10E+02	1.1	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Iron-59	1.82E+02	1.63E+02	1.12	Acceptable
EZA	1st/2020	05/08/20	E13169	Milk	pCi/L	Zinc-65	2.69E+02	2.52E+02	1.07	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cerium-141	2.11E+02	1.90E+02	1.11	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cesium-134	1.53E+02	1.54E+02	0.99	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cesium-137	2.08E+02	1.85E+02	1.12	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Chromium-51	4.34E+02	3.88E+02	1.12	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cobalt-58	2.21E+02	1.96E+02	1.13	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Cobalt-60	2.59E+02	2.36E+02	1.10	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Iodine-131	1.02E+02	9.29E+01	1.1	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Iron-59	1.79E+02	1.68E+02	1.06	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Manganese-54	2.48E+02	2.16E+02	1.15	Acceptable
EZA	1st/2020	05/08/20	E13170	Water	pCi/L	Zinc-65	3.05E+02	2.61E+02	1.17	Acceptable
EZA	2nd/2020	07/31/20	E13171	Cartridge	pCi	Iodine-131	9.68E+01	9.19E+01	1.05	Acceptable
EZA	2nd/2020	07/31/20	E13172	Milk	pCi/L	Strontium-89	8.67E+01	8.81E+01	0.98	Acceptable
EZA	2nd/2020	07/31/20	E13172	Milk	pCi/L	Strontium-90	1.06E+01	1.27E+01	0.83	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cerium-141	1.29E+02	1.16E+02	1.11	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cobalt-58	1.04E+02	1.00E+02	1.03	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cobalt-60	2.00E+02	1.95E+02	1.02	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Chromium-51	2.91E+02	2.56E+02	1.14	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cesium-134	1.40E+02	1.46E+02	0.96	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Cesium-137	1.09E+02	1.04E+02	1.05	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Iron-59	1.09E+02	1.01E+02	1.08	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Iodine-131	8.31E+01	8.15E+01	1.02	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Manganese-54	1.41E+02	1.34E+02	1.05	Acceptable
EZA	2nd/2020	07/31/20	E13173	Milk	pCi/L	Zinc-65	2.48E+02	2.25E+02	1.10	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cerium-141	1.23E+02	1.17E+02	1.05	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cobalt-58	1.05E+02	1.02E+02	1.03	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cobalt-60	2.05E+02	1.98E+02	1.04	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Chromium-51	2.76E+02	2.59E+02	1.06	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cesium-134	1.36E+02	1.48E+02	0.92	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Cesium-137	1.04E+02	1.05E+02	0.99	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Iron-59	1.05E+02	1.02E+02	1.03	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Iodine-131	9.10E+01	8.05E+01	1.13	Acceptable
EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Manganese-54	1.47E+02	1.35E+02	1.09	Acceptable

EZA	2nd/2020	07/31/20	E13174	Water	pCi/L	Zinc-65	2.49E+02	2.27E+02	1.10	Acceptable
EZA	3rd/2020	11/10/20	E13175	Cartridge	pCi	Iodine-131	7.96E+01	7.67E+01	1.04	Acceptable
EZA	3rd/2020	11/10/20	E13176	Milk	pCi/L	Strontium-89	1.13E+02	9.54E+01	1.18	Acceptable
EZA	3rd/2020	11/10/20	E13176	Milk	pCi/L	Strontium-90	9.47E+01	1.28E+02	0.74	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cerium-141	1.47E+02	1.50E+02	0.98	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cobalt-58	1.81E+02	1.80E+02	1.01	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cobalt-60	3.85E+02	3.79E+02	1.02	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Chromium-51	4.11E+02	3.72E+02	1.10	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cesium-134	1.82E+02	2.00E+02	0.91	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Cesium-137	2.58E+02	2.50E+02	1.03	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Iron-59	2.29E+02	2.00E+02	1.14	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Iodine-131	9.49E+01	9.50E+01	1.00	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Manganese-54	1.96E+02	1.80E+02	1.09	Acceptable
EZA	3rd/2020	11/10/20	E13177	Milk	pCi/L	Zinc-65	3.04E+02	2.70E+02	1.13	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cerium-141	1.58E+02	1.51E+02	1.05	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cobalt-58	1.90E+02	1.80E+02	1.05	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cobalt-60	4.04E+02	3.80E+02	1.06	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Chromium-51	3.45E+02	3.73E+02	0.92	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cesium-134	1.81E+02	2.01E+02	0.9	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Cesium-137	2.63E+02	2.51E+02	1.05	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Iron-59	2.26E+02	2.01E+02	1.12	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Iodine-131	9.80E+01	9.82E+01	1.00	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Manganese-54	2.06E+02	1.81E+02	1.14	Acceptable
EZA	3rd/2020	11/10/20	E13178	Water	pCi/L	Zinc-65	3.02E+02	2.71E+02	1.12	Acceptable
EZA	4th/2020	2/1/2021	E13179	Cartridge	pCi	Iodine-131	7.58E+01	7.81E+01	0.97	Acceptable
EZA	4th/2020	2/1/2021	E13180	Milk	pCi/L	Strontium-89	8.41E+01	8.97E+01	0.94	Acceptable
EZA	4th/2020	2/1/2021	E13180	Milk	pCi/L	Strontium-90	1.13E+01	1.30E+01	0.87	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cerium-141	9.76E+01	1.00E+01	0.98	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cobalt-58	8.58E+01	8.43E+01	1.02	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cobalt-60	1.66E+02	1.52E+02	1.09	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Chromium-51	2.68E+02	2.53E+02	1.06	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cesium-134	1.03E+02	1.08E+02	0.96	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Cesium-137	1.33E+02	1.27E+02	1.04	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Iron-59	1.28E+02	1.12E+02	1.14	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Iodine-131	9.44E+01	9.19E+01	1.08	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Manganese-54	1.49E+02	1.43E+02	1.04	Acceptable
EZA	4th/2020	2/1/2021	E13181	Milk	pCi/L	Zinc-65	2.17E+02	1.90E+02	1.14	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cerium-141	1.18E+02	1.06E+02	1.11	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cobalt-58	9.54E+01	8.92E+01	1.07	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cobalt-60	1.74E+02	1.61E+02	1.08	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Chromium-51	3.05E+02	2.68E+02	1.14	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cesium-134	1.14E+02	1.14E+02	1.00	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Cesium-137	1.37E+02	1.35E+02	1.02	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Iron-59	1.37E+02	1.19E+02	1.16	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Iodine-131	9.72E+01	9.57E+01	1.02	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Manganese-54	1.65E+02	1.51E+02	1.09	Acceptable
EZA	4th/2020	2/1/2021	E13182	Water	pCi/L	Zinc-65	2.29E+02	2.01E+02	1.14	Acceptable

TABLE 3
2020 DEPARTMENT OF ENERGY MIXED ANALYTE PERFORMANCE EVALUATION PROGRAM
(MAPEP) RESULTS

PT Provider	Quarter / Year	Report Received Date	Sample Number	Sample Media	Unit	Analyte / Nuclide	GEL Value	Known value	Acceptance Range/ Ratio	Evaluation
MAPEP	2nd/2020	07/02/20	MAPEP-20-GrF42	Filter	Bq/sample	Gross alpha	0.79	1.24	0.37-2.11	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-GrF42	Filter	Bq/sample	Gross beta	1.84	2.00	1.00-3.00	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-GrW42	Water	Bq/L	Gross alpha	1.01	1.03	0.31-1.75	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-GrW42	Water	Bq/L	Gross beta	4.18	4.24	2.12-6.36	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Americium-241	43.0	40.9	28.6-53.2	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Cesium-134	984	1114	780-1448	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Cesium-137	1060	1020	714-1326	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Cobalt-57	1200.000	1071	750-1392	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Cobalt-60	0.366		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Iron-55	950.0	1096	767-1425	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Manganese-54	961	945	662-1229	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Nickel-63	-0.727		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Plutonium-238	38.0	41.8	29.3-54.3	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Plutonium-239/240	38.0	41.8	29.3-54.3	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Potassium-40	618	625	438-813	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Strontium-90	286	340	238-442	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Technetium-99	728	706	494-918	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	U-234/233	43.2	40.3	28.2-52.4	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Uranium-238	64.6	68.0	48-88	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaS42	Soil	Bq/Kg	Zinc-65	784	751	526-976	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Americium-241	0.545	0.547	0.383-0.711	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Cesium-134	17.0	18.5	13.0-24.1	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Cesium-137	12.0	11.3	7.9-14.7	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Cobalt-57	19.7	19.7	13.8-25.6	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Cobalt-60	11.0	10.6	7.4-13.8	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Hydrogen-3	193	196	137-255	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Iron-55	18.2	17.8	12.5-23.1	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Manganese-54	20.6	19.6	13.7-25.5	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Nickel-63	14.1	11.1	7.8-14.4	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Plutonium-238	0.822	0.940	0.66-1.22	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Plutonium-239/240	0.686	0.737	0.516-0.958	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Potassium-40	-0.0485		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Radium-226	0.366	0.365	0.256-0.475	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Strontium-90	0.0122		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Technetium-99	3.72	3.63	2.54-4.72	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Uranium-234	1.02	0.97	0.68-1.26	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Uranium-238	0.98	0.95	0.67-1.24	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-MaW42	Water	Bq/L	Zinc-65	23.9	22.2	15.5-28.9	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-XaW42	Alk. Water	Bq/L	Iodine-129	1.01	1.001	0.701-1.301	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	ug/sample	Uranium-235	0.0438	0.0460	0.0322-0.0598	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	ug/sample	Uranium-238	6.39	6.3	4.4-8.2	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	ug/sample	Uranium-Total	6.43	6.3	4.4-8.2	Acceptable

MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Americium-241	0.0671	0.0675	0.0473-0.0878	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Cesium-134	0.626	0.600	0.420-0.780	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Cesium-137	0.802	0.735	0.515-0.956	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Cobalt-57	1.54	1.50	1.05-1.95	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Cobalt-60	1.29	1.23	0.86-1.60	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Manganese-54	0.0065		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Plutonium-238	0.0341	0.0348	0.0244-0.0452	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Plutonium-239/240	0.0395	0.0379	0.0265-0.0493	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Strontium-90	0.884	0.97	0.68-1.26	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Uranium-234	0.0788	0.075	0.053-0.098	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Uranium-238	0.0801	0.078	0.055-0.101	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdF42	Filter	Bq/sample	Zinc-65	1.43	1.18	0.83-1.53	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Americium-241	0.0761	0.075	0.053-0.098	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Cesium-134	3.55	3.82	2.67-4.97	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Cesium-137	2.83	2.77	1.94-3.60	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Cobalt-57	0.00561		False Pos Test	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Cobalt-60	2.84	2.79	1.95-3.63	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Manganese-54	4.74	4.58	3.21-5.95	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Plutonium-238	0.0447	0.0472	0.0330-0.0614	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Plutonium-239/240	0.06950	0.0772	0.0540-0.1004	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Strontium-90	0.361	0.492	0.344-0.640	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Uranium-234	0.1070	0.102	0.071-0.133	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Uranium-238	0.1150	0.103	0.072-0.134	Acceptable
MAPEP	2nd/2020	07/02/20	MAPEP-20-RdV42	Vegetation	Bq/sample	Zinc-65	4.14	3.79	2.65-4.93	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Americium-241	1.2		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Cesium-134	625	710	497-923	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Cesium-137	0.87		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Cobalt-57	1260	1100	770-1430	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Cobalt-60	998	1000	700-1300	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Iron-55	811	577	404-750	Not Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Manganese-54	661	610	427-793	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Nickel-63	840	980	686-1274	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Plutonium-238	53.1	57.7	40.4-75	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Plutonium-239/240	68.1	79.0	55-103	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Potassium-40	704	622	435-809	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Strontium-90	434	487	341-633	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Technetium-99	5		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	U-234/233	51	48	33.7-62.5	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Uranium-238	126	128	90-166	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaS43	Soil	Bq/Kg	Zinc-65	531	470	329-611	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Americium-241	0.942	0.922	0.645-1.199	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Cesium-134	13.9	15.2	10.6-19.8	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Cesium-137	15.10	14.3	10.0-18.6	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Cobalt-57	-0.0072		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Cobalt-60	12.90	12.2	8.5-15.9	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Hydrogen-3	330	360	252-468	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Iron-55	29.20	32.9	23.0-42.8	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Manganese-54	-0.0032		False Pos Test	Acceptable

MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Nickel-63	-0.93		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Plutonium-238	0.6430	0.7040	0.493-0.915	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Plutonium-239/240	0.001	0.009	Sens. Evaluation	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Potassium-40	-0.763		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Radium-226	1.020	1.250	0.88-1.63	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Strontium-90	9.97	11.60	8.1-15.1	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Technetium-99	8.720	9.40	6.6-12.2	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Uranium-234/233	1.27	1.26	0.88-1.64	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Uranium-238	1.31	1.30	0.9-1.7	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-MaW43	Water	Bq/L	Zinc-65	18.9	16.9	11.8-22	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	ug/sample	Uranium-235	0.0920	0.1020	0.071-0.133	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	ug/sample	Uranium-238	13.1	14.6	10.2-19	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	ug/sample	Uranium-Total	13.2	14.7	10.3-19.1	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Americium-241	0.129	0.134	0.094-0.174	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Cesium-134	1.72	1.83	1.28-2.38	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Cesium-137	1.04	0.996	0.697-1.295	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Cobalt-57	0.00126		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Cobalt-60	1.85	1.73	1.21-2.25	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Manganese-54	1.64	1.40	0.98-1.82	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Plutonium-238	0.0917	0.0867	0.0607-0.1127	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Plutonium-239/240	0.0019	0.0017	Sens. Evaluation	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Strontium-90	1.790	2.080	1.46-2.70	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Uranium-234/233	0.1820	0.175	0.123-0.228	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Uranium-238	0.1860	0.182	0.127-0.237	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdF43	Filter	Bq/sample	Zinc-65	2.29	2.00	1.40-2.60	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Americium-241	0.1040	0.103	0.072-0.134	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Cesium-134	4.5	4.94	3.46-6.42	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Cesium-137	0.0134		False Pos Test	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Cobalt-57	6.70	6.67	4.67-8.67	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Cobalt-60	4.27	4.13	2.89-5.37	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Manganese-54	6.04	5.84	4.09-7.59	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Plutonium-238	0.0002	0.001	Sens. Evaluation	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Plutonium-239/240	0.05370	0.0624	0.0437-0.0811	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Strontium-90	1.07	1.39	0.97-1.81	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Uranium-234/233	0.1270	0.1150	0.081-0.150	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Uranium-238	0.1260	0.1200	0.084-0.156	Acceptable
MAPEP	4th/2020	12/14/20	MAPEP-20-RdV43	Vegetation	Bq/sample	Zinc-65	7.04	6.38	4.47-8.29	Acceptable

TABLE 4
2020 ERA PROGRAM PERFORMANCE EVALUATION RESULTS

PT Provider	Quarter / Year	Report Received Date	Sample Number	Sample Media	Unit	Analyte / Nuclide	GEL Value	Known value	Acceptance Range	Evaluation
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Barium-133	59.2	64.5	53.7 - 71.0	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Cesium-134	21.5	22.9	17.5 - 25.6	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Cesium-137	217	220	198 - 244	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Cobalt-60	97.7	91.2	82.1 - 103	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Zinc-65	332	298	268 - 348	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Gross Alpha	67.1	58.9	30.8 - 73.3	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Gross Alpha	55.4	58.9	30.8 - 73.3	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Gross Beta	20	21	12.6 - 29.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Radium-226	15.6	17.4	12.9 - 19.9	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Radium-228	5.71	7.95	5.06 - 10.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Radium-228	5.68	7.95	5.06 - 10.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Uranium (Nat)	64.8	68.2	55.7 - 75.0	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Tritium	15200	17800	15600 - 19600	Not Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Tritium	17700	17800	15600 - 19600	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Strontium-89	73.3	59.3	47.6 - 67.1	Not Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Strontium-89	70.8	59.3	47.6 - 67.1	Not Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Strontium-90	38.3	36.5	26.8 - 42.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Strontium-90	30.6	36.5	26.8 - 42.1	Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Iodine-131	23.7*	29.9	24.9 - 34.9	Not Acceptable
ERA	1st/2020	2/24/20	RAD-120	Water	pCi/L	Iodine-131	31.8	29.9	24.9 - 34.9	Acceptable
ERA	2nd/2020	05/26/20	RAD-121	Water	pCi/L	Tritium	13100	14100	12300 - 15500	Acceptable
ERA	2nd/2020	05/26/20	RAD-121	Water	pCi/L	Strontium-89	68.8	60.1	48.3 - 67.9	Not Acceptable
ERA	2nd/2020	05/26/20	RAD-121	Water	pCi/L	Strontium-89	71.6	60.1	48.3 - 67.9	Not Acceptable
ERA	2nd/2020	05/26/20	RAD-121	Water	pCi/L	Iodine-131	27.5	28.9	24.1 - 33.8	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Barium-133	64.7	58.6	48.6 - 64.6	Not Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Cesium-134	23	22.3	17.0 - 25.0	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Cesium-137	76.5	73	65.7 - 83.0	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Cobalt-60	97.9	86.1	77.5 - 97.0	Not Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Zinc-65	96.3	82.9	74.6 - 99.6	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Gross Alpha	54.3	52.4	27.3 - 65.6	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Gross Beta	24.7	24.3	15.0 - 32.3	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Radium-226	9.42	10.8	8.08 - 12.5	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Radium-228	5.55	5.42	3.28 - 7.19	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Uranium (Nat)	28.9	29.3	23.7 - 32.5	Acceptable

ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Uranium (Nat) mass	41.3	42.7	34.5 - 47.4	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Tritium	17800	20300	17800 - 22300	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	µg/L	Tritium	20200	20300	17800 - 22300	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Strontium-89	61.7	68.9	56.2 - 77.1	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Strontium-90	18.2	19.5	13.9 - 23.1	Acceptable
ERA	3rd /2020	08/24/20	RAD - 122	Water	pCi/L	Iodine-131	29.9	26.1	21.7 - 30.8	Acceptable

TABLE 5
2020 ERA PROGRAM (MRAD) PERFORMANCE EVALUATION RESULTS

PT Provider	Quarter / Year	Report Received Date	Sample Number	Sample Media	Unit	Analyte / Nuclide	GEL Value	Known value	Acceptance Range/ Ratio	Evaluation
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Actinium-228	3200	3170	2090 - 3990	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Actinium-228	3200	3170	2090 - 3990	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Americium-241	1410	1730	934 - 2450	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Bismuth-212	3160	3280	939 - 4890	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Bismuth-212	3160	3280	939 - 4890	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Bismuth-214	1870	2270	1090 - 3380	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Bismuth-214	1870	2270	1090 - 3380	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cesium-134	5040	6200	4240 - 7410	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cesium-134	5040	6200	4240 - 7410	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cesium-137	6830	7280	5510 - 9210	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cesium-137	6830	7280	5510 - 9210	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cobalt-60	4840	5170	4070 - 6380	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Cobalt-60	4840	5170	4070 - 6380	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Lead-212	3580	3280	2290 - 4150	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Lead-212	3580	3280	2290 - 4150	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Lead-214	2380	2330	979 - 3660	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Lead-214	2380	2330	979 - 3660	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Manganese-54	<25.4	<1000	<1000	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Manganese-54	<25.4	<1000	<1000	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Plutonium-238	951	1010	504 - 1540	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Plutonium-239	1020	1240	676 - 1780	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Potassium-40	26000	24700	17000 - 29500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Potassium-40	26000	24700	17000 - 29500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Strontium-90	1980	2550	794 - 3970	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Strontium-90	1980	2550	794 - 3970	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Strontium-90	1980	2550	794 - 3970	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Thorium-234	5090	4010	1510 - 6870	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Thorium-234	5090	4010	1510 - 6870	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-234	3330	3600	1690 - 4720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-234	3910	3600	1690 - 4720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-238	3490	3570	1960 - 4790	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-238	2950	3570	1960 - 4790	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-Total	6980	7340	4070 - 9490	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Uranium-Total	6995	7340	4070 - 9490	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	µg/kg	Uranium-Total (mass)	10500	10700	4830 - 14400	Acceptable

ERA	2nd/2020	05/19/20	MRAD-32	Soil	µg/kg	Uranium-Total (mass)	8830	10700	4830 - 14400	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Zinc-65	1070	1100	879 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Soil	pCi/kg	Zinc-65	1070	1100	879 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Americium-241	3470	3950	2440 - 5580	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cesium-134	1780	2150	1430 - 2860	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cesium-134	1780	2150	1430 - 2860	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cesium-137	942	1030	792 - 1390	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cesium-137	942	1030	792 - 1390	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cobalt-60	987	997	783 - 1300	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Cobalt-60	987	997	783 - 1300	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Curium-244	881	1050	592 - 1310	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Manganese-54	<39.6	<300	<300	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Manganese-54	<39.6	<300	<300	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Plutonium-238	1070	1150	796 - 1480	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Plutonium-239	227	232	160 - 294	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Potassium-40	35700	39300	29500 - 49800	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Potassium-40	35700	39300	29500 - 49800	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Strontium-90	1720	1720	970 - 2240	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Strontium-90	1720	1720	970 - 2240	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Strontium-90	1720	1720	970 - 2240	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Uranium-234	1750	1900	1330 - 2420	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Uranium-238	1780	1880	1330 - 2350	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Uranium-Total	3620	3870	2470 - 5220	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	µg/kg	Uranium-Total (mass)	5330	5640	4330 - 6990	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Zinc-65	2740	2750	2050 - 4080	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Vegetation	pCi/kg	Zinc-65	2740	2750	2050 - 4080	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Americium-241	64.9	74.7	53.3 - 99.6	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cesium-134	1360	1390	902 - 1700	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cesium-134	1360	1390	902 - 1700	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cesium-137	370	351	288 - 460	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cesium-137	370	351	288 - 460	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cobalt-60	459	422	359 - 536	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Cobalt-60	459	422	359 - 536	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Iron-55	1150	1260	460 - 2010	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Manganese-54	<3.87	<50.0	<50.0	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Manganese-54	<3.87	<50.0	<50.0	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Plutonium-238	21.9	28	21.1 - 34.4	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Plutonium-239	30.6	40.1	30.0 - 48.4	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Strontium-90	181	175	111 - 238	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-234	45.7	56.2	41.7 - 65.9	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-234	46.7	56.2	41.7 - 65.9	Acceptable

ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-238	46	55.7	42.1 - 66.5	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-238	39.6	55.7	42.1 - 66.5	Not Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-Total	94.5	114	83.2 - 135	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Uranium-Total	88.1	114	83.2 - 135	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	µg/Filter	Uranium-Total (mass)	138	167	134 - 196	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	µg/Filter	Uranium-Total (mass)	118	167	134 - 196	Not Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Zinc-65	798	694	569 - 1060	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Zinc-65	798	694	569 - 1060	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Gross Alpha	34.4	29.3	15.3 - 48.3	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Air Filter	pCi/Filter	Gross Beta	61.1	66.4	40.3 - 100	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Americium-241	47.9	45.3	31.1 - 57.9	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-134	1420	1520	1150 - 1670	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-134	1420	1520	1150 - 1670	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-134	1420	1520	1150 - 1670	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-137	2440	2390	2050 - 2720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-137	2440	2390	2050 - 2720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cesium-137	2440	2390	2050 - 2720	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cobalt-60	2890	2760	2380 - 3170	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cobalt-60	2890	2760	2380 - 3170	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Cobalt-60	2890	2760	2380 - 3170	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Iron-55	140	152	89.3 - 221	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Manganese-54	<6.25	<100	<100	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Manganese-54	<6.25	<100	<100	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Manganese-54	<6.25	<100	<100	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Plutonium-238	32.5	36.4	21.9 - 47.2	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Plutonium-239	29.7	33.6	20.8 - 41.4	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Strontium-90	426	447	322 - 552	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-234	187	186	142 - 213	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-234	226*	186	142 - 213	Not Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-238	191	184	143 - 217	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-238	199	184	143 - 217	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-Total	387	378	295 - 431	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Uranium-Total	434.3*	378	295 - 431	Not Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	µg/L	Uranium-Total (mass)	572	551	446 - 625	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	µg/L	Uranium-Total (mass)	595	551	446 - 625	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Zinc-65	1330	1190	1060 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Zinc-65	1330	1190	1060 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Zinc-65	1330	1190	1060 - 1500	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Gross Alpha	67.6	165	60.2 - 228	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Gross Alpha	67.6	165	60.2 - 228	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Gross Beta	143	158	79.0 - 217	Acceptable

ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Gross Beta	143	158	79.0 - 217	Acceptable
ERA	2nd/2020	05/19/20	MRAD-32	Water	pCi/L	Tritium	5990	6280	4730 - 7640	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Actinium-228	3530	3290	2170 - 4150	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Americium-241	780	677	366 - 959	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Bismuth-212	3780	3290	942 - 4900	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Bismuth-214	2970	3790	1820 - 5640	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Cesium-134	3760	4180	2860 - 5000	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Cesium-137	6890	6940	5250 - 8780	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Cobalt-60	2280	2520	1980 - 3110	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Lead-214	3680	4080	1710 - 6410	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Lead-214	3720	4080	1710 - 6410	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Manganese-54	<23.9	<1000	<1000	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Plutonium-238	1460	1670	833 - 2540	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Potassium-40	24600	24700	17000 - 29500	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Strontium-90	5110	4980	1550 - 7760	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Thorium-234	5370	4740	1790 - 8120	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-234	4550	4780	2240 - 6260	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-234	5100	4780	2240 - 6260	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-238	4800	4740	2600 - 6360	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-238	4870	4740	2600 - 6360	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-Total	9590	9730	5400 - 12600	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Uranium-Total	10189	9730	5400 - 12600	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	µg/kg	Uranium-Total (mass)	14400	14200	6410 - 19200	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	µg/kg	Uranium-Total (mass)	14600	14200	6410 - 19200	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Soil	pCi/kg	Zinc-65	1220	1120	895 - 1530	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Americium-241	2680	2940	1820 - 4150	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Cesium-134	862	945	627 - 1260	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Cesium-137	735	823	633 - 1110	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Cobalt-60	663	691	542 - 903	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Curium-244	3100	3400	1920 - 4230	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Manganese-54	<47.5	<300	<300	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Plutonium-238	4470	4590	3180 - 5920	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Plutonium-239	838	768	531 - 972	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Potassium-40	33500	34500	25900 - 43700	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Strontium-90	8790	8690	4900 - 11300	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Uranium-234	2650	2920	2050 - 3720	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Uranium-238	2720	2900	2050 - 3630	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Uranium-Total	5510	5950	3800 - 8020	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	µg/kg	Uranium-Total (mass)	8150	8680	6660 - 10800	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Vegetation	pCi/kg	Zinc-65	1640	1580	1180 - 2340	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Americium-241	22.3	22.2	15.8 - 29.6	Acceptable

ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Cesium-134	268	296	192 - 363	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Cesium-137	407	413	339 - 542	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Cobalt-60	507	497	422 - 631	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Iron-55	361	407	149 - 649	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Manganese-54	<3.82	<50.0	<50.0	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Plutonium-238	25.3	28.8	21.7 - 35.4	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Plutonium-239	31	33.7	25.2 - 40.7	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Strontium-90	30.5	36.2	22.9 - 49.3	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-234	16.5	18.3	13.6 - 21.4	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-234	19.5	18.3	13.6 - 21.4	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-238	18.5	18.1	13.7 - 21.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-238	18.2	18.1	13.7 - 21.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Uranium-Total	35.8	37.2	27.2 - 44.1	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	µg/Filter	Uranium-Total (mass)	55.3	54.3	43.6 - 63.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	µg/Filter	Uranium-Total (mass)	54.4	54.3	43.6 - 63.6	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Zinc-65	540	500	410 - 764	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Gross Alpha	32.2	26.1	13.6 - 43.0	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Air Filter	pCi/Filter	Gross Beta	94.2	85.9	52.1 - 130	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Americium-241	185	176	121 - 225	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Cesium-134	849	911	688 - 1000	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Cesium-137	1540	1510	1290 - 1720	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Cobalt-60	1660	1560	1350 - 1790	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Iron-55	267	298	175 - 433	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Manganese-54	<4.61	<100	<100	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Plutonium-238	160	191	115 - 247	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Plutonium-239	81.7	100	61.9 - 123	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Strontium-90	917	787	567 - 973	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-234	33.8	35.2	26.8 - 40.3	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-234	39.2	35.2	26.8 - 40.3	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-238	34.7	34.9	27.0 - 41.1	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-238	32.7	34.9	27.0 - 41.1	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-238	37.3	34.9	27.0 - 41.1	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-Total	70.4	71.8	56.0 - 81.9	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Uranium-Total	78.2	71.8	56.0 - 81.9	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	µg/L	Uranium-Total (mass)	104	105	85.0 - 119	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	µg/L	Uranium-Total (mass)	112	105	85.0 - 119	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Zinc-65	1010	917	816 - 1160	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Gross Alpha	100	111	40.5 - 153	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Gross Beta	181	194	97.0 - 267	Acceptable
ERA	4th/2020	11/16/20	MRAD-33	Water	pCi/L	Tritium	11600	12000	9040 - 14600	Acceptable

FIGURE 1

COBALT-60 PERFORMANCE EVALUATION RESULTS AND % BIAS

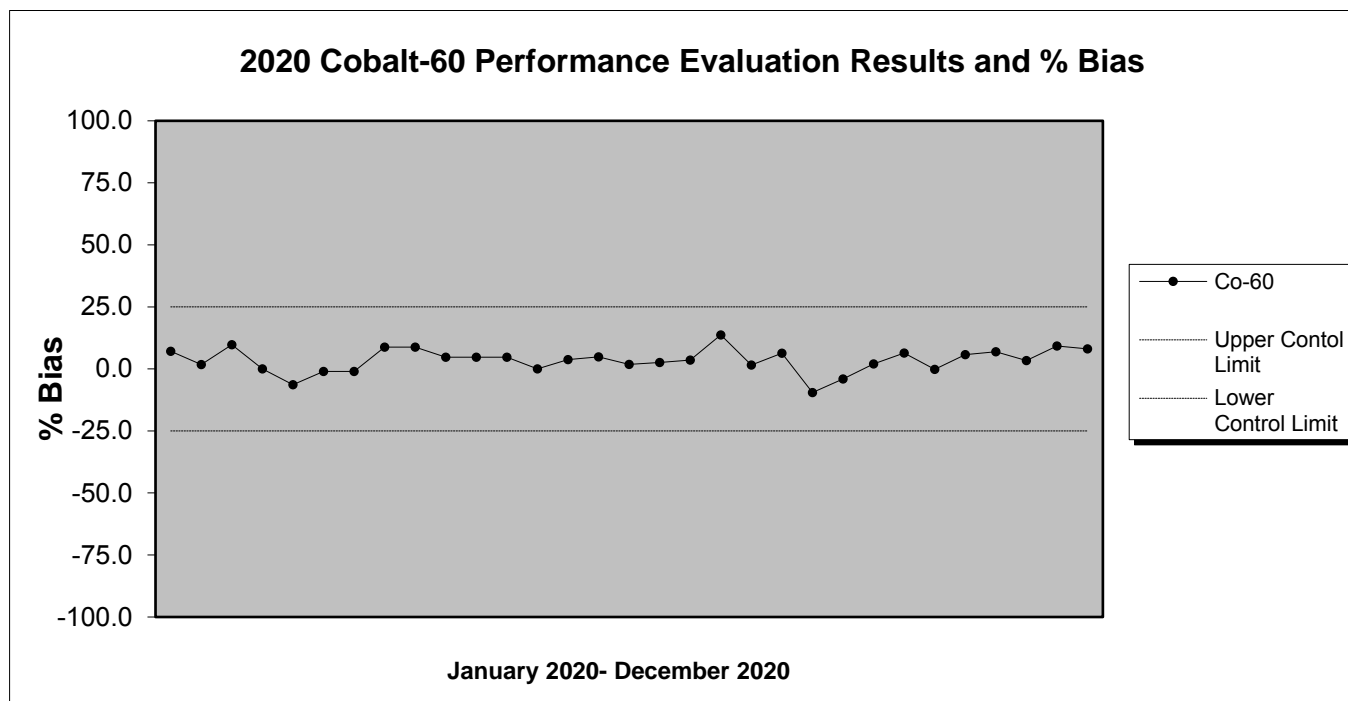


FIGURE 2

CESIUM-137 PERFORMANCE EVALUATION RESULTS AND % BIAS

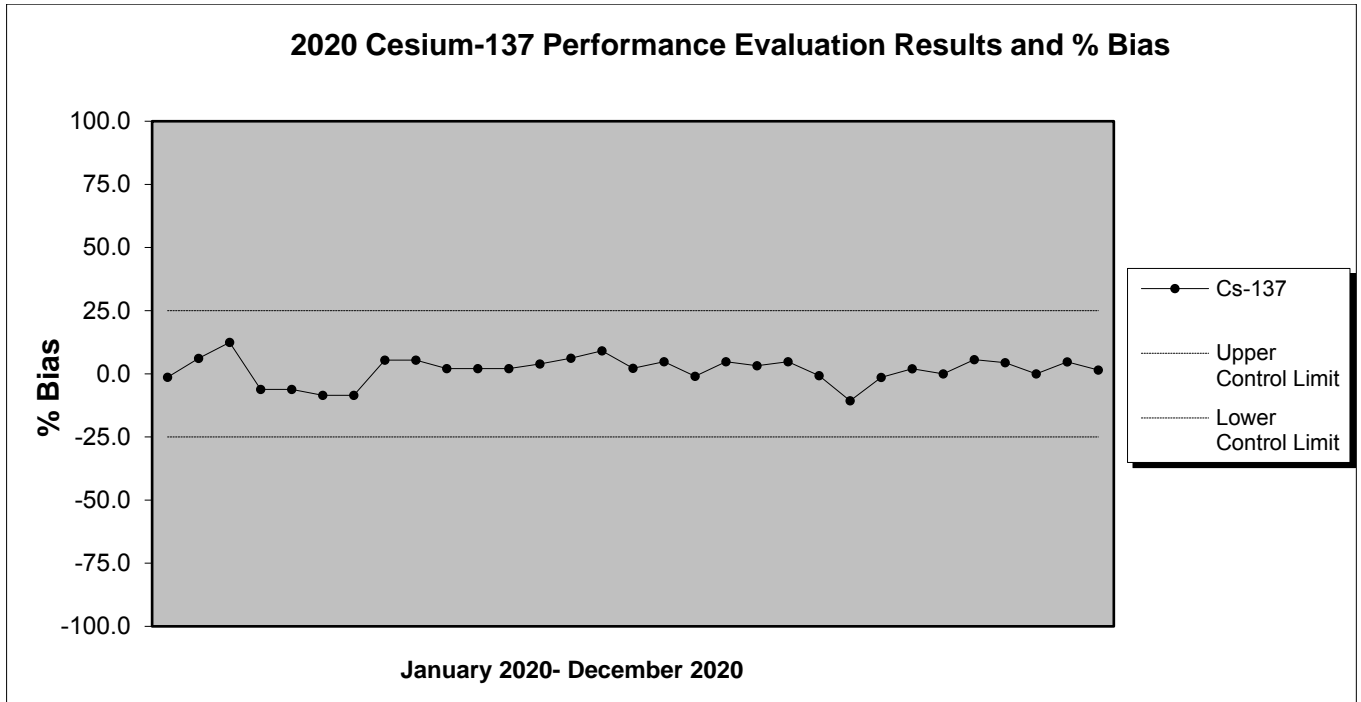


FIGURE 3

TRITIUM PERFORMANCE EVALUATION RESULTS AND % BIAS

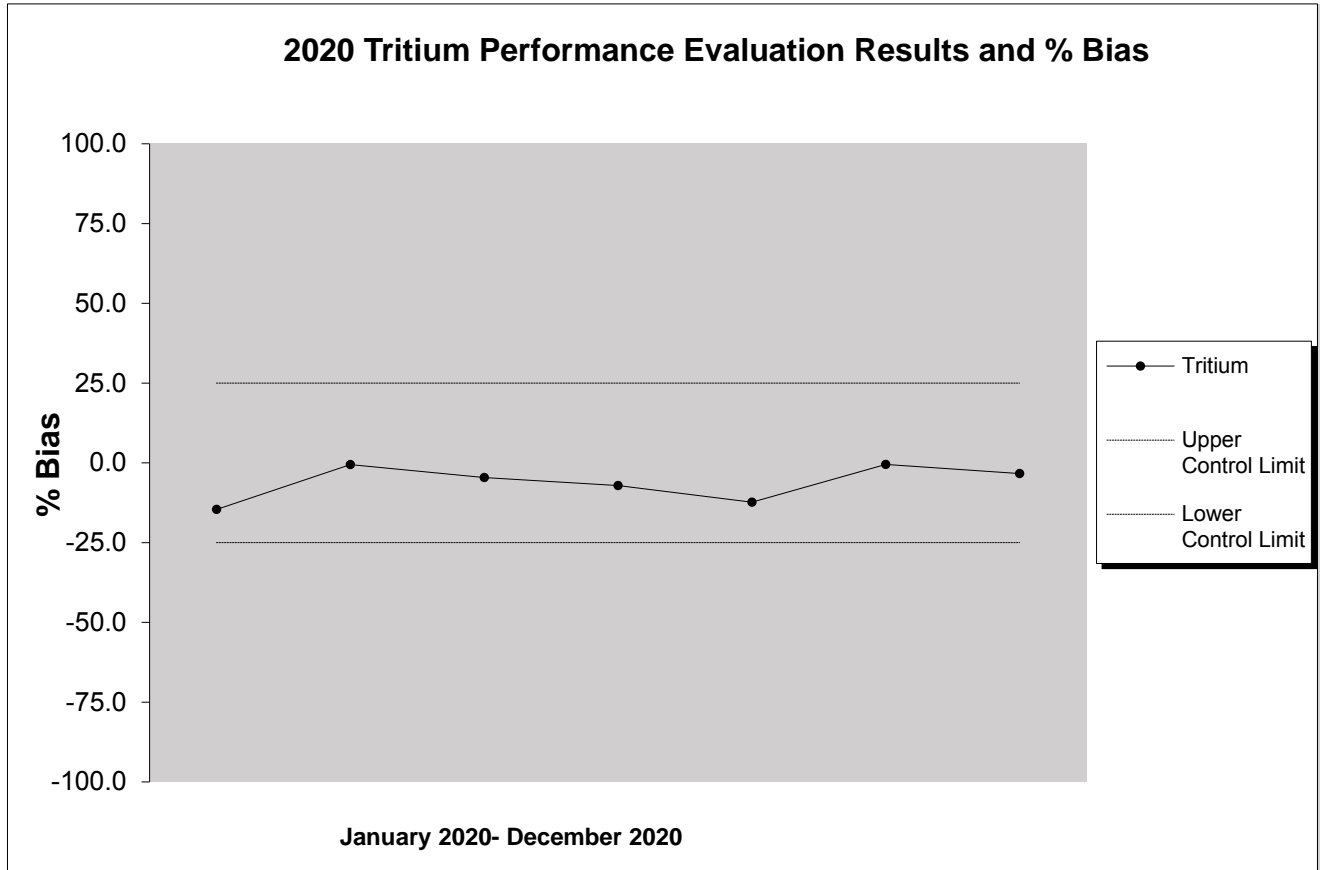


FIGURE 4

STRONTIUM-90 PERFORMANCE EVALUATION RESULTS AND % BIAS

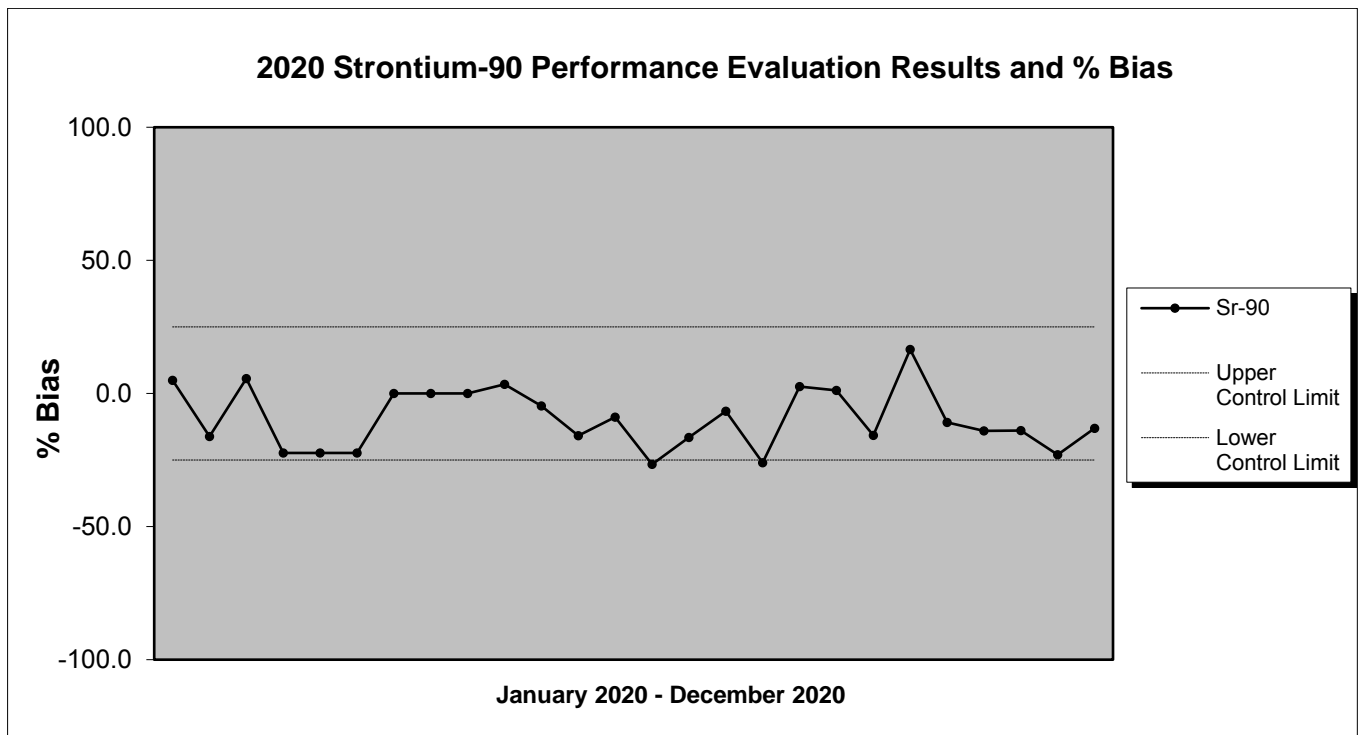


FIGURE 5

GROSS ALPHA PERFORMANCE EVALUATION RESULTS AND % BIAS

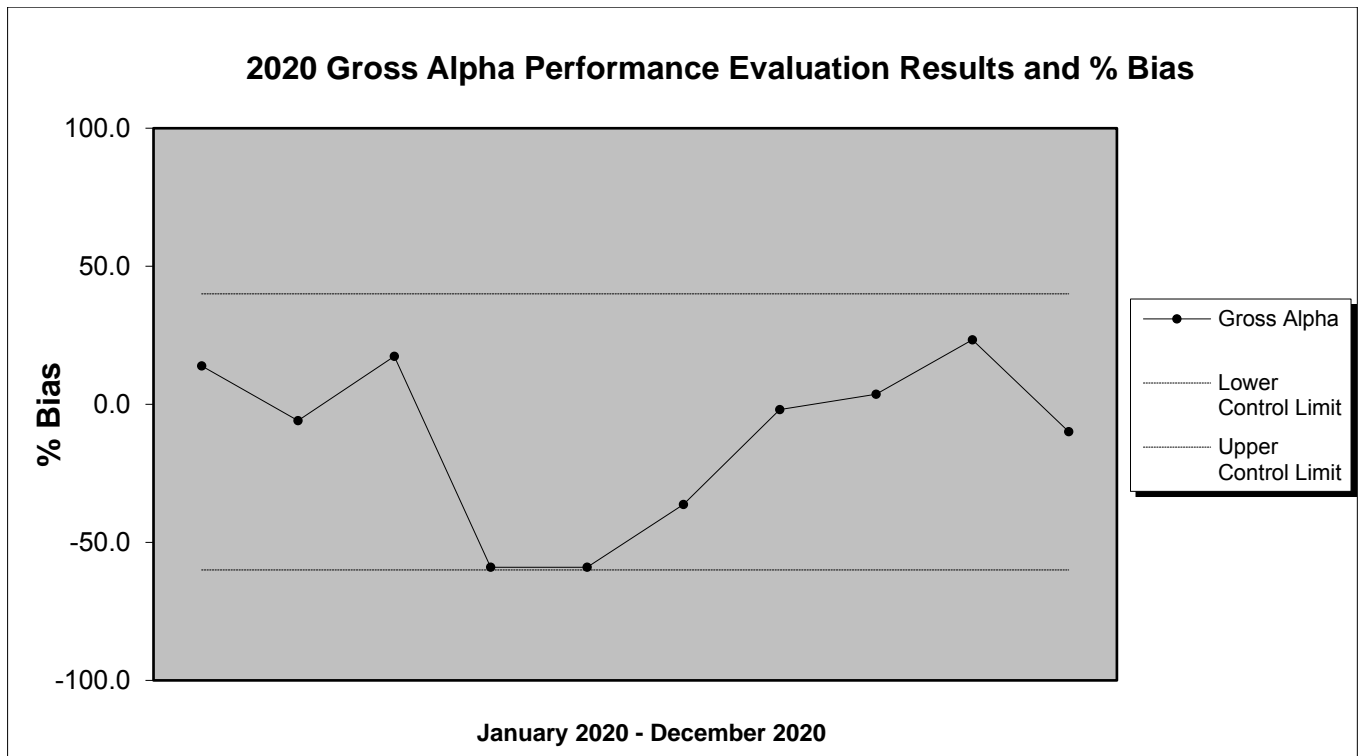


FIGURE 6

GROSS BETA PERFORMANCE EVALUATION RESULTS AND % BIAS

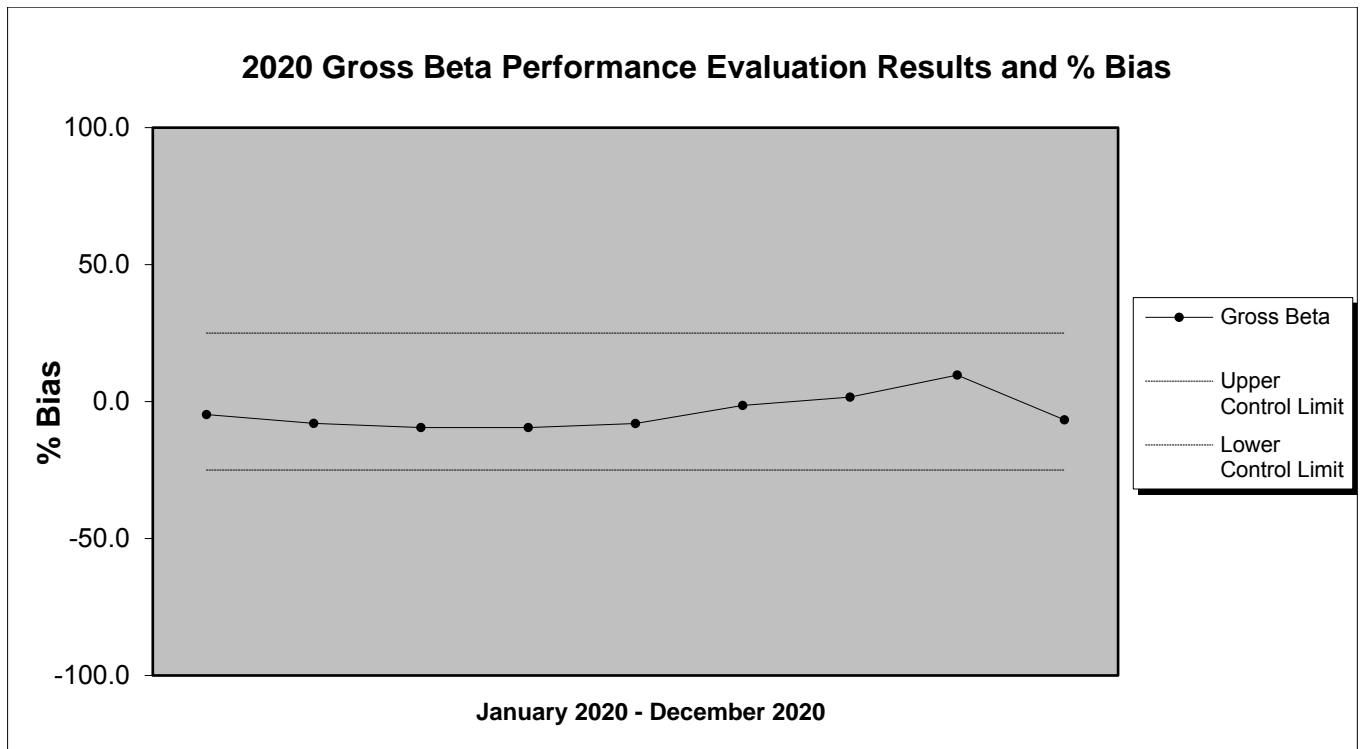


FIGURE 7

IODINE-131 PERFORMANCE EVALUATION RESULTS AND % BIAS

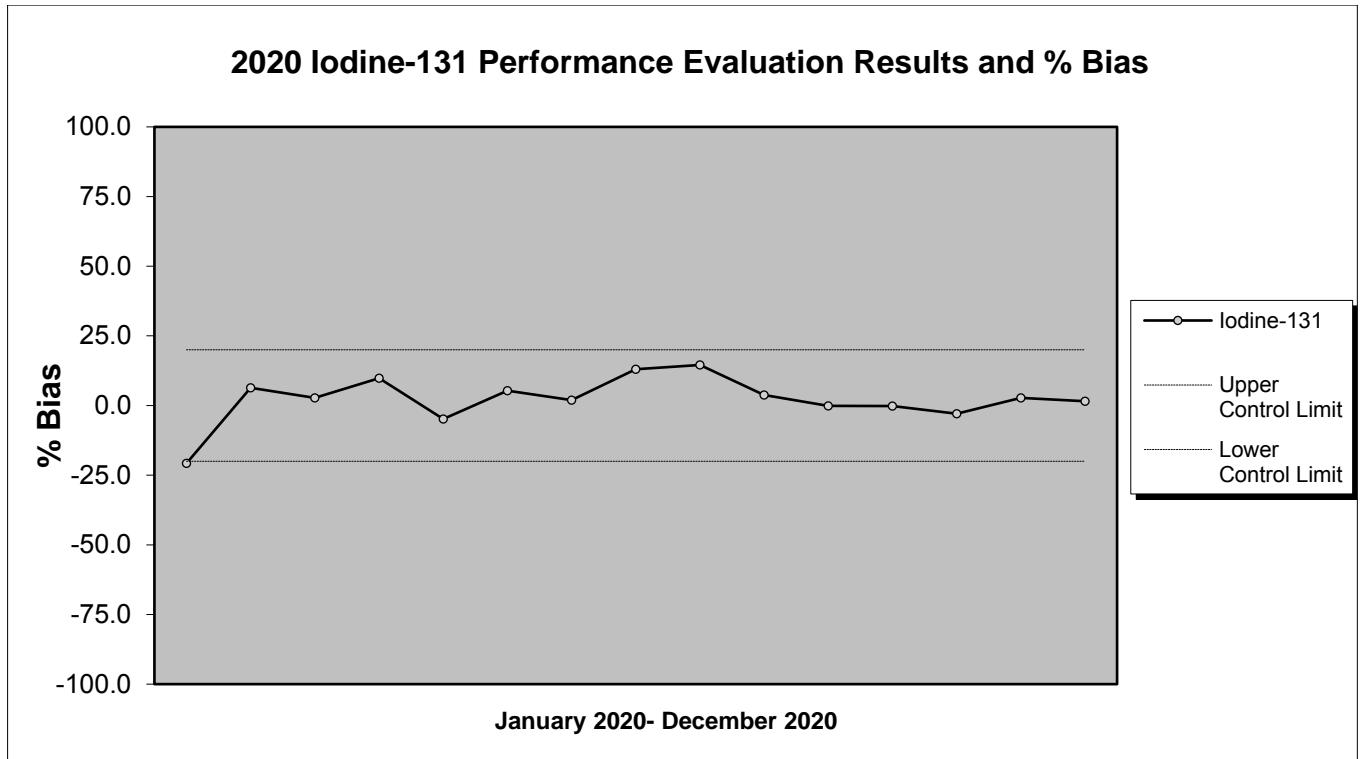


FIGURE 8

AMERICIUM-241 PERFORMANCE EVALUATION RESULTS AND % BIAS

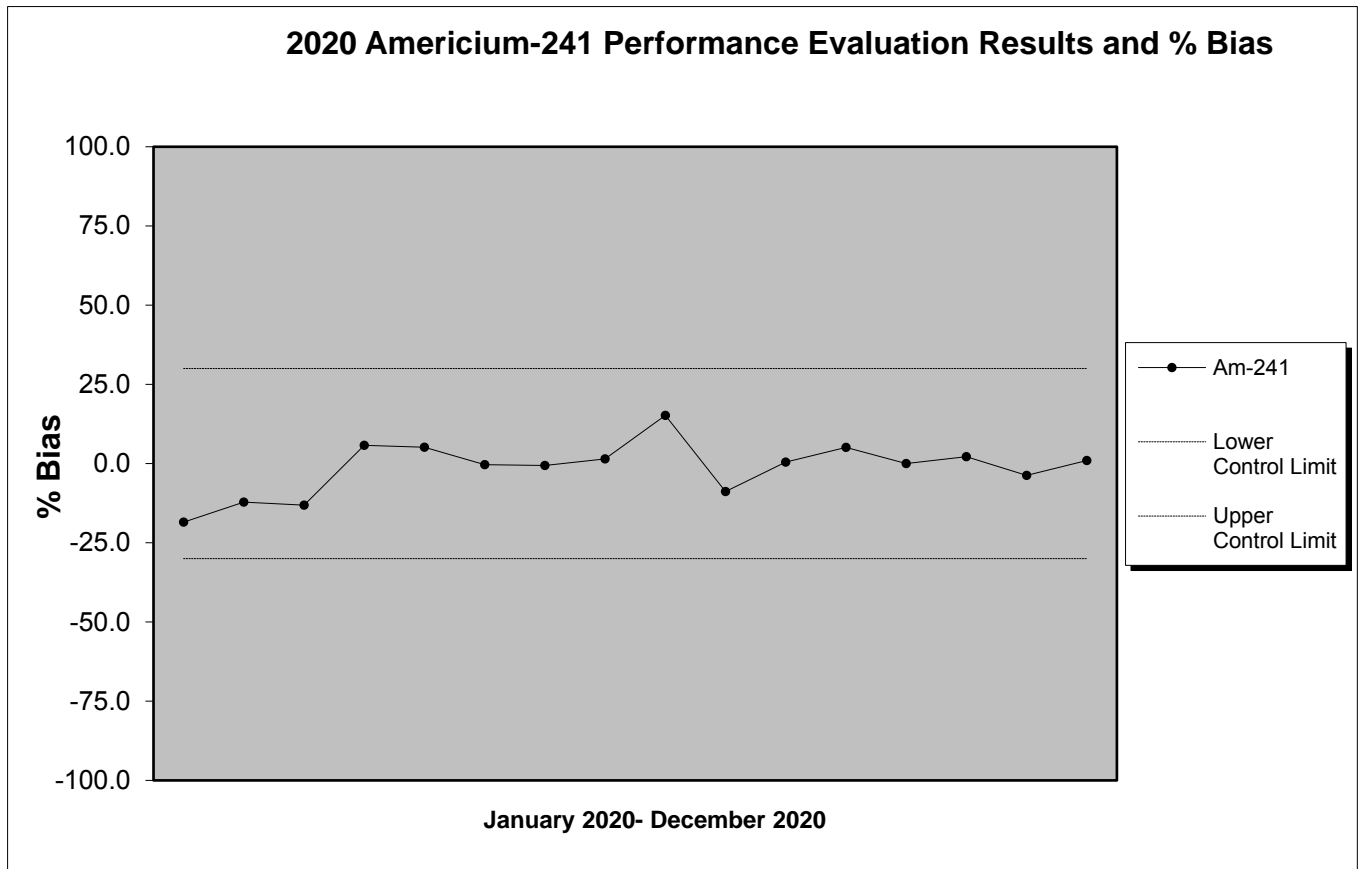


FIGURE 9

PLUTONIUM-238 PERFORMANCE EVALUATION RESULTS AND % BIAS

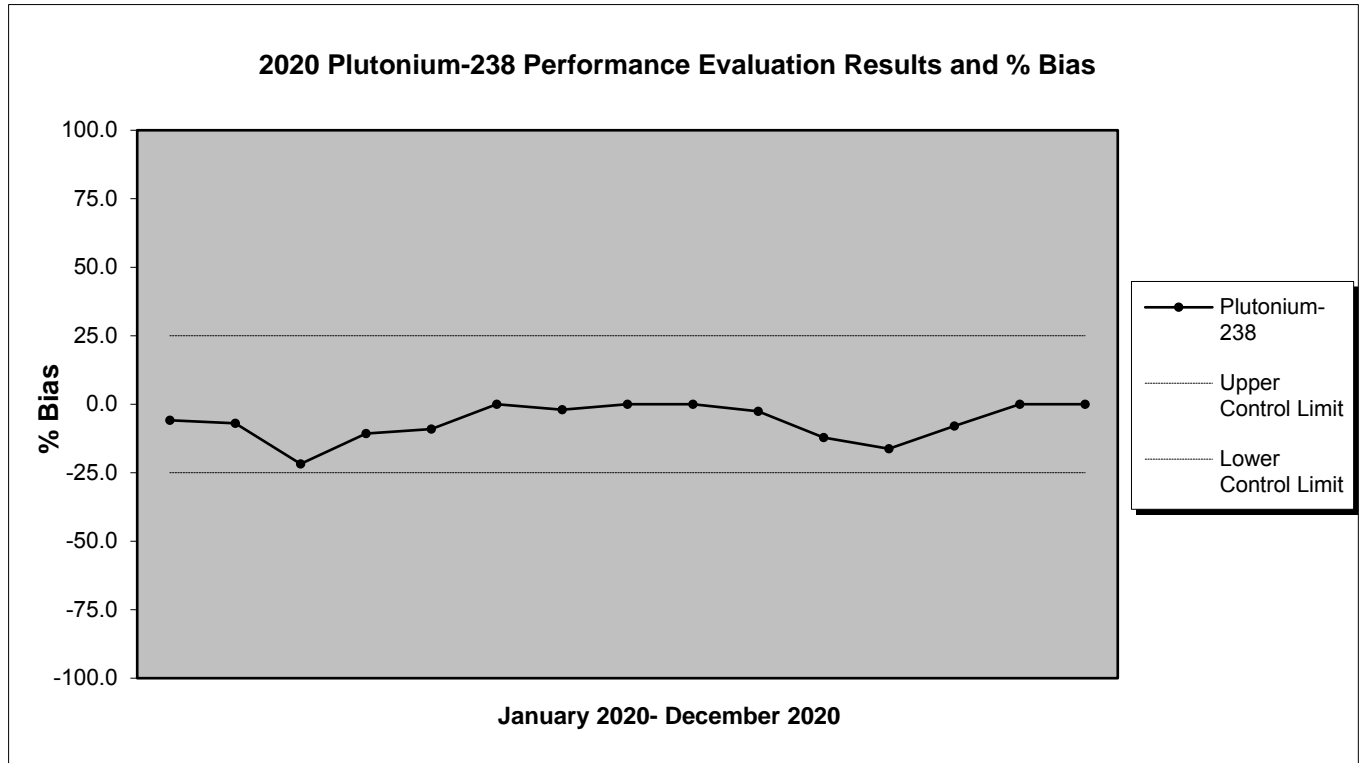


TABLE 6
REMP INTRA-LABORATORY DATA SUMMARY: BIAS AND PRECISION BY MATRIX

2020 Total REMP Intra-Laboratory Data	Bias Criteria (+ / - 25%)		Precision Criteria (Note 1)	
	WITHIN CRITERIA	OUTSIDE CRITERIA	WITHIN CRITERIA	OUTSIDE CRITERIA
MILK				
Gas Flow Sr 2nd count	46	0	57	0
Gas Flow Total Strontium	16	0	16	0
Gamma Spec Liquid RAD A-013 with Ba, La	28	0	82	0
Gamma Spec Liquid RAD A-013 with Iodine	0	0	3	0
SOLID				
Gamma Spec Solid RAD A-013	9	0	12	0
LSC Nickel 63	4	0	4	0
Gas Flow Sr 2nd count	4	0	7	0
Gas Flow Total Strontium	3	0	4	0
Gamma Spec Solid RAD A-013 with Iodine	22	0	48	0
FILTER				
Gross A & B	512	0	362	0
Gamma Spec Filter	43	0	83	0
LIQUID				
Alpha Spec Uranium	1	0	1	0
Tritium	212	0	271	0
LSC Iron-55	17	0	15	0
LSC Nickel 63	17	0	15	0
Gamma Iodine-131	6	0	7	0
Alpha Spec Plutonium	1	0	1	0
Gas Flow Sr 2nd count	2	0	3	0
Alpha Spec Am241 Curium	1	0	1	0
Gas Flow Total Strontium	16	0	14	0
Gross Alpha Non Vol Beta	33	0	71	0
Gamma Spec Liquid RAD A-013 with Ba, La	76	0	191	0
Gamma Spec Liquid RAD A-013 with Iodine	25	0	80	0
TISSUE				
Gamma Spec Solid RAD A-013	40	0	49	0
Gas Flow Sr 2nd count	12	0	10	0
Gas Flow Total Strontium	8	0	7	0
Gamma Spec Solid RAD A-013 with Iodine	21	0	21	0
VEGETATION				
Gamma Spec Solid RAD A-013	13	0	13	0
Gas Flow Sr 2nd count	10	0	11	0
Gamma Spec Solid RAD A-013 with Iodine	83	0	110	0
AIR CHARCOAL				
Carbon-14 (Ascarite/Soda Lime Filter per Liter)	35	0	35	0

DRINKING WATER				
Tritium	36	0	39	0
LSC Iron-55	14	0	16	0
LSC Nickel 63	14	0	16	0
Gamma Iodine-131	31	0	22	0
Gas Flow Sr 2nd count	15	0	14	0
Gas Flow Total Strontium	13	0	15	0
Gross Alpha Non Vol Beta	77	0	82	0
Gamma Spec Liquid RAD A-013 with Ba, La	21	0	73	0
Gamma Spec Liquid RAD A-013 with Iodine	0	0	6	0
Total	1537		1887	

Note 1: The RPD must be 20 percent or less, if both samples are greater than 5 times the MDC. If both results are less than 5 times MDC, then the RPD must be equal to or less than 100%. If one result is above the MDC and the other is below the MDC, then the RPD can be calculated using the MDC for the result of the one below the MDC. The RPD must be 100% or less. In the situation where both results are above the MDC but one result is greater than 5 times the MDC and the other is less than 5 times the MDC, the RPD must be less than or equal to 20%. If both results are below MDC, then the limits on % RPD are not applicable.

TABLE 7
ALL RADIOLOGICAL INTRA-LABORATORY DATA SUMMARY:
BIAS AND PRECISION BY MATRIX:

2020 Total All Intra-Laboratory Data	Bias Criteria (+ / - 25%)		Precision Criteria (Note 1)	
	WITHIN CRITERIA	OUTSIDE CRITERIA	WITHIN CRITERIA	OUTSIDE CRITERIA
MILK				
Gamma Spec Liquid RAD A-013	5	0	5	0
Gamma Iodine-129	6	0	6	0
Gamma Iodine-131	5	0	116	0
Gas Flow Sr 2nd count	46	0	57	0
Gas Flow Strontium 90	10	0	11	0
Gas Flow Total Strontium	16	0	16	0
Gamma Spec Liquid RAD A-013 with Ba, La	28	0	82	0
Gamma Spec Liquid RAD A-013 with Iodine	5	0	7	0
SOLID				
Gas Flow Radium 228	71	0	75	0
Alpha Spec Neptunium	471	0	455	0
Tritium	345	0	406	0
Tritium by Pyrolysis	0	0	1	0
Carbon-14	232	0	283	0
Carbon-14 by Pyrolysis	0	0	1	0
LSC Iron-55	135	0	146	0
Alpha Spec Polonium Solid	37	0	52	0
Gamma Nickel 59 RAD A-022	140	0	156	0
LSC Chlorine-36 in Solids	1	0	2	0
Gamma Spec Ra226 RAD A-013	22	0	25	0
Gamma Spec Solid RAD A-013	1122	0	1398	0
LSC Nickel 63	201	0	215	0
LSC Plutonium	219	0	234	0
Technetium-99	543	0	564	0
Gamma Spec Liquid RAD A-013	1	0	1	0
Gross Alpha Beta Soil Leach	31	0	31	0
ICP-MS Technetium-99 in Soil	6	0	3	0
LSC Selenium 79	15	0	19	0
Total Activity,	8	0	13	0
Tritium	26	0	27	0
Alpha Spec Am243	89	0	108	0
Gamma Iodine-129	93	0	160	0
Gas Flow Lead 210	19	0	23	0
Alpha Spec Uranium	746	0	900	0
LSC Promethium 147	1	0	4	0
LSC, Rapid Strontium 89 and 90	67	0	74	0

Alpha Spec Thorium	470	0	567	0
ICP-MS Uranium-233, 234 in Solid	55	0	57	0
LSC Sulfur 35	2	0	3	0
Alpha Spec Neptunium (pCi/Sample)	3	0	3	0
Alpha Spec Plutonium	509	0	486	0
ICP-MS Technetium-99 Prep in Soil	6	0	3	0
LSC Calcium 45	0	0	1	0
Alpha Spec Plutonium	158	0	232	0
Alpha Spec Radium 226	34	0	45	0
Dissolution Soil Prep	4	0	4	0
Gas Flow Sr 2nd count	27	0	35	0
Gas Flow Strontium 90	335	0	308	0
Gas Flow Total Radium	2	0	2	0
Lucas Cell Radium 226	98	0	116	0
Alpha Spec Am241 Curium	438	0	483	0
Alpha Spec Total Uranium	62	0	64	0
Gas Flow Total Strontium	51	0	53	0
ICP-MS Uranium-233, 234 Prep in Solid	57	0	59	0
ICP-MS Uranium-235, 236, 238 in Solid	57	0	65	0
Alpha Spec Polonium Solid	3	0	3	0
Gamma Spec Solid RAD A-013 with Iodine	22	0	48	0
GFC Chlorine-36 in Solids	13	0	19	0
Gamma Spec Solid RAD A-013 (pCi/Sample)	6	0	5	0
Technetium-99	3	0	3	0
Tritium	1	0	3	0
Alpha Spec Am241 (pCi/Sample)	3	0	3	0
ICP-MS Uranium-234, 235, 236, 238 in Solid	223	0	264	0
ICP-MS Uranium-235, 236, 238 Prep in Solid	65	0	81	0
Alpha Spec Thorium	2	0	3	0
Gross Alpha/Beta (Am/Cs Calibration) Solid	0	0	2	0
ICP-MS U-234, 235, 236, 238 Prep per sample	13	0	13	0
Gross Alpha/Beta	403	0	502	0
Alpha Spec Plutonium	3	0	3	0
Gas Flow Strontium 90	3	0	3	0
Gross Alpha/Beta (Americium Calibration) Solid	1	0	1	0
ICP-MS Uranium-234, 235, 236, 238 Prep in Solid	93	0	149	0
Gross Alpha Beta (F,U)	30	0	33	0
FILTER				
Alpha Spec Polonium	0	0	8	0
Gamma I-131, filter	5	0	5	0
Alpha Spec Neptunium	69	0	109	0
LSC Plutonium Filter	74	0	129	0
Tritium	34	0	242	0

Carbon-14 Direct Count	0	0	54	0
Carbon-14	1	0	97	0
ICP-MS Tc-99 in Filter	0	0	5	0
Nickel-63	0	0	25	0
LSC Iron-55	76	0	94	0
Gamma Nickel 59 RAD A-022	84	0	110	0
Alpha Spec Californium FPL	12	0	12	0
LSC Nickel 63	71	0	98	0
Technetium-99	7	0	103	0
Gamma Spec Filter RAD A-013	158	0	246	0
ICP-MS Tc-99 Prep in Filter	0	0	9	0
Alphaspec Np Filter per Liter	19	0	24	0
Alphaspec Pu Filter per Liter	19	0	33	0
Gamma Iodine-129	1	0	79	0
Alpha Spec Am243	17	0	38	0
Gas Flow Lead 210	1	0	6	0
Alpha Spec Uranium	49	0	118	0
LSC Promethium 147	0	0	1	0
LSC, Rapid Strontium 89 and 90	89	0	107	0
Alpha Spec Thorium	34	0	91	0
Gas Flow Radium 228	2	0	16	0
Alpha Spec Plutonium	48	0	121	0
ICP-MS Uranium-233, 234 in Filter	1	0	10	0
LSC Sulfur 35	0	0	1	0
Alpha Spec Plutonium	96	0	176	0
Alpha Spec Plutonium	11	0	11	0
Alpha Spec Polonium,(Filter/Liter)	0	0	2	0
Alpha Spec Radium 226	0	0	13	0
Gas Flow Sr 2nd Count	34	0	60	0
Gas Flow Strontium 90	57	0	101	0
Gas Flow Total Radium	1	0	5	0
LSC Plutonium 241 Filter per Liter	20	0	45	0
Lucas Cell Radium-226	0	0	12	0
Alpha Spec Am241Curium	101	0	181	0
ICP-MS Uranium-233, 234 Prep in Filter	1	0	9	0
ICP-MS Uranium-235, 236, 238 in Filter	4	0	13	0
Total Activity in Filter,	0	0	51	0
Alphaspec Am241 Curium Filter per Liter	33	0	76	0
Tritium	96	0	130	0
GFC Chlorine-36 in Filters	0	0	1	0
Gamma Spec Filter RAD A-013 Direct Count	3	0	9	0
Carbon-14	22	0	35	0
GFC Chlorine-36 in Filters PL	1	0	1	0
Gross A & B (Americium Calibration) Liquid	1	0	42	0
Direct Count-Gross Alpha/Beta	89	0	0	0
Gross Alpha/Beta	41	0	57	0

ICP-MS Uranium-234, 235, 236, 238 in Filter	7	0	55	0
ICP-MS Uranium-235, 236, 238 Prep in Filter	4	0	12	0
Alpha Spec U	33	0	77	0
Gross A & B	568	0	443	0
LSC Iron-55	8	0	17	0
Technetium-99	29	0	49	0
Gas Flow Sr-90	19	0	45	0
LSC Nickel 63	37	0	45	0
Gamma Spec Charcoal	11	0	11	0
Gas Flow Pb-210	13	0	34	0
Gas Flow Ra-228	13	0	28	0
Gross Alpha Beta (Flame, Unflame)	10	0	10	0
Direct Count- Alpha/Beta (Americium Calibration)	21	0	0	0
Gamma Iodine 129	8	0	8	0
ICP-MS Uranium-234, 235, 236, 238 Prep in Filter	3	0	27	0
Gamma Spec Filter	99	0	154	0
Lucas Cell Ra-226	8	0	38	0
Alpha Spec Thorium	23	0	47	0
LIQUID				
Alpha Spec Uranium	496	0	756	0
Alpha Spec Polonium	19	0	20	0
Alpha Spec Neptunium	172	0	236	0
Tritium	1276	0	1383	0
Carbon-14	186	0	219	0
Plutonium	131	0	151	0
Chlorine-36 in Liquids	4	0	5	0
Iodine-131	6	0	4	0
LSC Iron-55	100	0	167	0
Gamma Nickel 59 RAD A-022	27	0	43	0
Gamma Iodine 131 RAD A-013	2	0	2	0
LSC Nickel 63	144	0	197	0
LSC Radon 222	18	0	22	0
Technetium-99	673	0	720	0
Gamma Spec Liquid RAD A-013	859	0	970	0
Alpha Spec Total U RAD A-011	24	0	40	0
LSC Selenium 79	38	0	38	0
Total Activity,	15	0	20	0
Alpha Spec Am243	20	0	26	0
Gamma Iodine-129	145	0	182	0
Gamma Iodine-131	6	0	7	0
ICP-MS Technetium-99 in Water	8	0	9	0
Gas Flow Lead 210	11	0	16	0
Gross Alpha, Beta	5	0	5	0
LSC Promethium 147	22	0	22	0
LSC, Rapid Strontium 89 and 90	9	0	15	0

Alpha Spec Thorium	237	0	316	0
Gas Flow Radium 228	14	0	7	0
Gas Flow Radium 228	682	0	728	0
Alpha Spec Plutonium	354	0	482	0
LSC Sulfur 35	17	0	17	0
Alpha Spec Plutonium	41	0	51	0
Alpha Spec Radium 226	32	0	37	0
Gas Flow Sr 2nd count	102	0	161	0
Gas Flow Strontium 90	511	0	584	0
Gas Flow Strontium 90	5	0	5	0
Gas Flow Total Radium	428	0	328	0
ICP-MS Technetium-99 Prep in Water	8	0	9	0
ICP-MS Uranium-233, 234 in Liquid	7	0	11	0
LSC Calcium 45	15	0	15	0
Lucas Cell Radium 226	372	0	597	0
Lucas Cell Radium-226	12	0	13	0
Chlorine-36 in Liquids	19	0	21	0
Alpha Spec Am241 Curium	317	0	427	0
Gas Flow Total Strontium	100	0	103	0
Gross Alpha Non Vol Beta	868	0	1213	0
LSC Phosphorus-32	4	0	4	0
ICP-MS Uranium-233, 234 Prep in Liquid	5	0	9	0
Tritium in Drinking Water by EPA 906.0	5	0	5	0
Gamma Spec Liquid RAD A-013 with Ba, La	78	0	203	0
Gamma Spec Liquid RAD A-013 with Iodine	97	0	174	0
Gas Flow Strontium 89 & 90	2	0	3	0
ICP-MS Uranium-235, 236, 238 in Liquid	11	0	13	0
Gas Flow Total Alpha Radium	15	0	15	0
Gross Alpha Co-precipitation	3	0	28	0
ICP-MS Uranium-235, 236, 238 Prep in Liquid	7	0	11	0
Gross Alpha/Beta	0	0	1	0
ICP-MS Uranium-234, 235, 236, 238 in Liquid	147	0	132	0
Gross Alpha Beta (Flame, Unflame)	284	0	303	0
Gross Alpha Beta (Americium Calibration) Liquid	47	0	95	0
ICP-MS Uranium-234, 235, 236, 238 Prep in Liquid	69	0	66	0
Alpha/Beta (Americium Calibration) Drinking Water	38	0	37	0
TISSUE				
Gamma Spec Solid RAD A-013	48	0	63	0
Alpha Spec Uranium	5	0	6	0
Alpha Spec Plutonium	5	0	5	0
Gas Flow Sr 2nd count	12	0	10	0
Gas Flow Strontium 90	7	0	6	0
Alpha Spec Am241 Curium	3	0	3	0

Gas Flow Total Strontium	8	0	7	0
Gamma Spec Solid RAD A-013 with Iodine	21	0	21	0
Gross Alpha/Beta	3	0	3	0
VEGETATION				
Carbon-14	3	0	2	0
Gamma Spec Solid RAD A-013	39	0	36	0
Tritium	2	0	1	0
Gas Flow Lead 210	0	0	5	0
Alpha Spec Uranium	25	0	21	0
Alpha Spec Thorium	10	0	10	0
Alpha Spec Plutonium	24	0	17	0
Gas Flow Sr 2nd count	10	0	11	0
Gas Flow Strontium 90	21	0	14	0
Gas Flow Total Radium	3	0	5	0
Alpha Spec Am241 Curium	6	0	5	0
Gamma Spec Solid RAD A-013 with Iodine	83	0	110	0
Gamma Spec Solid RAD A-013 (pCi/Sample)	3	0	3	0
Alpha Spec Am241 (pCi/Sample)	3	0	3	0
Alpha Spec Uranium	0	0	3	0
Gross Alpha/Beta	5	0	8	0
Alpha Spec Plutonium	0	0	3	0
Gas Flow Strontium 90	6	0	3	0
AIR CHARCOAL				
Gamma Iodine-129	19	0	8	0
Carbon-14	15	0	15	0
Carbon-14 (Ascarite/Soda Lime Filter per Liter)	35	0	35	0
Gamma Spec Charcoal	15	0	15	0
Gamma Iodine 129	15	0	15	0
DRINKING WATER				
Alpha Spec Uranium	2	0	1	0
Tritium	38	0	41	0
LSC Iron-55	14	0	16	0
LSC Nickel 63	14	0	16	0
LSC Radon 222	9	0	10	0
Gamma Spec Liquid RAD A-013	4	0	4	0
Gamma Iodine-129	3	0	5	0
Gamma Iodine-131	31	0	22	0
Gas Flow Lead 210	1	0	1	0
Gas Flow Radium 228	43	0	46	0
Gas Flow Radium 226	0	0	3	0
Gas Flow Sr 2nd count	15	0	14	0
Gas Flow Strontium 90	12	0	13	0
Gas Flow Total Radium	2	0	1	0
Lucas Cell Radium 226	3	0	3	0
Lucas Cell Radium-226	48	0	46	0

Gamma Spec Drinking Water RAD A-013	35	0	28	0
Gas Flow Total Strontium	13	0	15	0
Gross Alpha Non Vol Beta	175	0	188	0
Tritium in Drinking Water by EPA 906.0	44	0	44	0
Gamma Spec Liquid RAD A-013 with Ba, La	21	0	73	0
Gamma Spec Liquid RAD A-013 with Iodine	0	0	6	0
Gas Flow Strontium 89 & 90	18	0	4	0
Alpha/Beta (Americium Calibration) Drinking Water	13	0	11	0
ECLS-R-GA NJ 48 Hr Rapid Gross Alpha	5	0	5	0
Total	20799		26108	

Note 1: The RPD must be 20 percent or less, if both samples are greater than 5 times the MDC. If both results are less than 5 times MDC, then the RPD must be equal to or less than 100%. If one result is above the MDC and the other is below the MDC, then the RPD can be calculated using the MDC for the result of the one below the MDC. The RPD must be 100% or less. In the situation where both results are above the MDC but one result is greater than 5 times the MDC and the other is less than 5 times the MDC, the RPD must be less than or equal to 20%. If both results are below MDC, then the limits on % RPD are not applicable.

TABLE 8
2020 CORRECTIVE ACTION REPORT SUMMARY

CORRECTIVE ACTION ID# & PE FAILURE	DISPOSITION
CORRECTIVE ACTION ID# & PE FAILURE	DISPOSITION
<p>CARR 201214-1296</p> <p>ISO Documentation of PT Failure in MAPEP 43:</p> <ul style="list-style-type: none"> Fe-55 in soil 	<p>Root Cause Analysis</p> <p>Upon receipt of the PT report, an investigation was initiated by the Quality Department and a Corrective Action (CARR) team assembled. The team consisted of representatives from the affected areas. The sample preparation and analytical processes were reviewed. This included review of reagents and standards used in the sample preparation steps, calibration records, process control samples, and interviews with the analysts.</p> <p>The investigation determined that the laboratory met all quality control criteria specified in the method. Additionally, all internal procedures and policies were performed as required. These failures were tracked through GEL's internal non-conformance system.</p> <p>Iron-55:</p> <p>The laboratory reviewed the data and noted that the tracer recoveries for this analysis were lower than typical soil tracer recoveries. The lower tracer recoveries contributed to an uncertainty of approximately 25%.</p> <p>The sample was recounted and recovered at 97% of the known value.</p> <p>Permanent Corrective/Preventive Actions or Improvements</p> <p>None at this time. The laboratory will continue to monitor the recoveries of these parameters to ensure that there are no continued issues in the processes.</p>
<p>CARR 200902-1287</p> <p>ISO Documentation of PT Failure in RAD-122 in drinking water for:</p> <ul style="list-style-type: none"> Ba-133 Co-60 	<p>Root Cause Analysis</p> <p>The data was reviewed and no anomalies were noted. The batch duplicate result from the original analysis met the acceptance criteria of the study and replication criteria of the laboratory with RPDs of <10% for both isotopes. Laboratory processes were evaluated and no gross errors were found. The other reported analytes for this method were within the limits of the study. A definitive contributor to the slightly high bias could not be identified concluding that this was an isolated occurrence for these isotopes.</p> <p>Permanent Corrective/Preventive Actions or Improvements</p>

	<p>None at this time. The laboratory will continue to monitor the recoveries of these parameters to ensure that there are no continued issues in the processes</p>
<p>CARR 200902-1278</p> <p>ISO Documentation of PT Failure in MRAD – 32 for</p> <ul style="list-style-type: none"> • U-238 filter • Total U (mass) filter • U-234 water • Total U water 	<p>Root Cause Analysis</p> <p>Filter: The sample was analyzed at 20X. As part of the investigation, the sample was reanalyzed at 5X and the results were within acceptance limits.</p> <p>Water: The samples were reanalyzed, and the results were within the acceptance limits. In reviewing the data, the laboratory suspects a possible bias in the lower end of the calibration.</p> <p>Permanent Corrective/Preventive Actions or Improvements</p> <p>Filter: The laboratory will be analyzing the sample without dilutions. The dilutions will only be performed when necessary.</p> <p>Water: The laboratory will be adding another point to the lower end of the calibration to remove potential bias in that section of the calibration.</p> <p>The laboratory successfully analyzed these isotopes during the next round of MRAD samples.</p>
<p>CARR 200224-1274</p> <p>ISO Documentation of PT failures in drinking water of RAD-120 for</p> <ul style="list-style-type: none"> • Sr-89 • Tritium • I - 131 	<p>Root Cause Analysis</p> <p>Strontium-89-A review of the data and the preparation processes did not reveal any errors or possible contributors to the high bias. In addition, the reported values are 117% and 114% of the reference value which are with the laboratory's standard acceptance criteria of +/- 25% for Laboratory Control Samples.</p> <p>Tritium-All data and laboratory processes were evaluated, and no errors were found. The Laboratory has concluded that this low bias was an isolated occurrence and that the overall process is within control.</p> <p>Iodine-131- The laboratory has reviewed the data and found no errors. All batch QC samples including a duplicate, met acceptability criteria. The laboratory will continue to investigate all steps of the analytical process.</p> <p>Permanent Corrective/Preventive Actions or Improvements</p> <p>None needed at this time. The laboratory must assume unidentified random errors caused the biases because all quality control criteria were met in the batch.</p> <p>Subsequent analyses of these isotopes for drinking water were acceptable in other PT samples during the year.</p>

This page intentionally left blank.

8.0 DCPD LAND USE CENSUS

2020 DCPD Land Use Census

Diablo Canyon Power Plant (DCPP) was owned and operated by Pacific Gas & Electric (PG&E) Company. PG&E owned and provided environmental stewardship to approximately 14 miles of Pacific Ocean coastline and approximately 13,000 acres surrounding the 1,000 acre DCPD site boundary. The PG&E property extended roughly from Avila Beach to Montana de Oro State Park. DCPD was located approximately seven miles WNW of Avila Beach and approximately four miles SSE of Montana de Oro State Park.

DCPD Radiological Environmental Monitoring Program (REMP) personnel conducted a Land Use Census (LUC) in the vicinity of DCPD for 2020. The LUC was based on Nuclear Regulatory Commission (NRC) Regulatory Guide 4.8, "Environmental Technical Specifications for Nuclear Power Plants". The LUC also provided compliance with 10 CFR 50 Appendix I Section IV (B)(3); "Identify changes in the use of unrestricted areas (e.g., for agricultural purposes) to permit modifications in monitoring programs for evaluating doses to individuals from principal pathways of exposure".

DCPD Program Directive CY2, "Radiological Monitoring and Controls Program" required performance of a LUC. DCPD procedure RP1.ID11, "Environmental Radiological Monitoring Procedure", required identification of the nearest milk animal, nearest residence, and the nearest broadleaf producing garden greater than 50 square meters (500 square feet) in each of the landward meteorological sectors within a radial distance of 8 kilometers (5 miles) of the Unit One Containment (CTMT) structure. A LUC was conducted at least once per year during the growing season (between Feb 15 and Dec 1) for the Diablo Canyon environs.

The 2020 LUC was conducted via landowner telephone or email interviews. Interviews were conducted March 24th through March 30th 2020. Ten individual landowners or tenants were contacted.

Milk:

No milk animals were identified within the first 8 kilometers (5 miles) of any sector.

Residences:

The nearest residence, relative to all sectors, was a small trailer located in the NNW sector about 2.43 kilometers (1.51 miles) from the plant. One ranch worker occupied this BLANCHARD trailer approximately 5 days per year.

Twenty structures were identified within the 8-kilometer (5-mile) radius of the site, which were confirmed or appear to have been occupied in 2020. Twenty-two abandoned structures were identified within the 8-kilometer (5-mile) radius of the site during the LUC.

The nearest residence in each sector was summarized in Table 8.

Gardens:

The LUC identified two household gardens greater than 50 square meters (500 square feet) that produced broadleaf vegetation. The READ garden (REMP station 3C1) was approximately ¼ acre and located in the NNE sector at 7.12 kilometers (4.42 miles). The KOONZE garden (REMP station 6C1) was approximately 500 square feet and located in the E sector at 7.46 kilometers (4.63 miles).

Additional Land Use:

It should be noted that the term "site-boundary" referred to the area within a radius of approximately 1.2 km (0.74 mi) from the Unit One CTMT structure. The area outside the "site-boundary" was also referred to as the "unrestricted area". Much of the area outside the site-boundary was routinely used for rotational cattle grazing by five separate cattle operations. For purposes of this land use census, the five cattle operations were called BLANCHARD, SINSHEIMER, READ, ANDRE, and MELLO.

BLANCHARD allowed cattle to graze within the DCPD environs in 2020. BLANCHARD did not graze any goats or sheep within 8 km (5 miles) of DCPD in 2020 due to drought conditions in San Luis Obispo County.

BLANCHARD's livestock were sold under the "Old Creek Ranch" label at local farmer's markets in 2020. "Old Creek Ranch" labeled meats were sampled quarterly by REMP personnel in 2020. The REMP station codes were BCM, BGM, and BSM (if available).

SINSHEIMER had about 100 cattle outside the site-boundary in the NNE sector. The cows were allowed to breed and about 90 yearling calves were sold to mass market in 2020. SINSHEIMER did not slaughter any cattle in 2020 for personal consumption.

READ had about 94 cows, 4 bulls, and 82 yearling calves outside the site-boundary in the NNE sector. About 82 yearling calves were sold to mass market in 2020. READ did not slaughter any cattle in 2020 for personal consumption.

ANDRE had about 50 cattle outside the site-boundary in the ENE sector. About 50 yearling calves were sold to mass market in 2020. ANDRE did not slaughter any cattle in 2020 for personal consumption.

MELLO managed about 600 cattle outside the site-boundary in the E, ESE, and SE sectors. A commercial cattle corporation owned these cattle and sold all of them to mass market in 2020. MELLO did not slaughter any cattle in 2020 for personal consumption.

Two landowners (JOHE and ANDRE) harvested wild game for personal consumption outside the site-boundary in the NNE, NE, and ENE sectors. This wild game consisted of approximately 2-4 deer per landowner.

There was a California State Park Ranger Office in the NNW sector at 7.48 kilometers (4.65 miles) from the site. Approximately three State Parks staff personnel occupied this office from 1000 to 1500 each day (365 days per year).

There was a public campground (Islay Creek Campground) located in the NNW sector at Montana de Oro State Park at 7.31 kilometers (4.54 miles). This campground was near Spooner's Cove. Approximately 713,000 people visited Montana de Oro State Park via day-use permit. Approximately 22,000 people spent the night at Islay Creek Campground.

There was public access to hiking trails at the north and south ends of the PG&E property in 2020.

The Point Buchon Trail was located at the north end of PG&E property and had about 18,000 visitors in 2020. The trail traversed about 3.4 miles of coastline from Coon Creek to Lion Rock overlook. The trail was open to the public for day hikes Thursday thru Monday from approximately 0800-1700. Two to three people from California Land Management occupied the trail head booth near Coon Creek during operational days from 0700 to 1730. This trail was originally opened to the public on July 13, 2007.

The Pecho Coast Trail was located at the south end of PG&E property and had about 3,000 visitors in 2020. The trail was approximately 3.8 miles long and led from the Avila Beach DCPD entrance gate to the Point San Luis Lighthouse property. Pecho Coast Trail hikes were only available on Wednesdays (about 20 people) and Saturdays (about 40 people). An extension of the trail up the coastline to Rattlesnake Canyon made the trail 8 miles roundtrip and was only available on Mondays (about 20 people each trip). This trail extension was improved in October 2017 to allow controlled vehicle access on the trail. Access was controlled (via web-site reservation permission only) and conducted by docents from approximately 0900 to 1500. This trail was just slightly outside the 5 mile radius of the DCPD site. This Pecho Coast Trail has been open for docent-guided hikes since 1993.

Thirty to forty Port San Luis Lighthouse keepers occupied the lighthouse grounds on Tuesdays, Thursdays, and Saturdays from 0800-1600. Special events were also held at the lighthouse throughout the year (e.g. weddings, fundraisers, reunions, etc). The lighthouse property was owned by the Port San Luis Harbor District.

NEI 07-07 Groundwater Protection Initiative (GPI) Review:

There were no site construction activities or radioactive spills that warranted changes to GPI monitoring frequencies, monitoring locations, lab analytical capabilities, or analytical detection thresholds in 2020.

There were no changes in on-site or near site groundwater usage.

Groundwater beneath the site power block was not used as a source of drinking water.

Old Steam Generator Storage Facility (OSGSF):

The OSGSF vault was located within the site-boundary in the ENE sector (68.3 degrees) at 0.99 km (0.61 mi) from Unit One CTMT.

The following plant equipment was placed into the OSGSF for the duration of the site operating license on the dates indicated below.

Unit One old steam generators (4 total) : 2/14/2009

Unit Two old steam generators (4 total) : 3/2/2008

Unit One old reactor head (1 total) : 10/23/2010

Unit Two old reactor head (1 total) : 11/6/2009

Independent Spent Fuel Storage Installation (ISFSI):

The on-site dry cask ISFSI pad was located within the site-boundary in the ENE sector (58.47 degrees) at 0.36 km (0.22 mi) from Unit One CTMT.

DCPP loaded it's first ISFSI dry cask onto the pad on 6/23/2009.

There were no dry cask loading campaigns in 2020.

At the end of 2020, a total of 58 dry casks occupy the ISFSI pad.

Table 8 summarizes the nearest residence location in each meteorological sector.

The Land Use Figure shows the location of the residences and gardens in the vicinity of DCPP.


Table 8**Land Use Census 2020**

**Distance in kilometers (and miles) from the center point of U-1 CTMT
Nearest Milk Animal, Residence, and Vegetable Garden**

22½ Degree ^(a) Radial Sector	Nearest Milk Animal	Nearest Residence km (mi)	Residence Azimuth Degree	Nearest Vegetable Garden km (mi)
NW	None	5.76 (3.58)	325.18	None
NNW	None	2.43 (1.51) ^(b)	332.01	None
N	None	None	—	None
NNE	None	5.18 (3.22)	21.43	7.12 (4.42) ^(c)
NE	None	7.94 (4.93)	35.33	None
ENE	None	7.15 (4.45)	63.84	None
E	None	5.96 (3.71)	89.89	7.46 (4.63) ^(d)
ESE	None	None	—	None
SE	None	None	—	None

Table Notation:

- ^(a) Sectors not shown were over water and contained no land (other than islets not used for the purposes indicated in this table) beyond the site-boundary.
- ^(b) BLANCHARD trailer was the residence used for critical receptor calculations.
- ^(c) The READ (REMP station 3C1) vegetable garden was located in the NNE sector and the 19.89 azimuth degree. There was also a limited use residence at this location.
- ^(d) The KOONZE (REMP station 6C1) vegetable garden was located in the E sector and the 97.26 azimuth degree. There was also a full-time residence at this location.

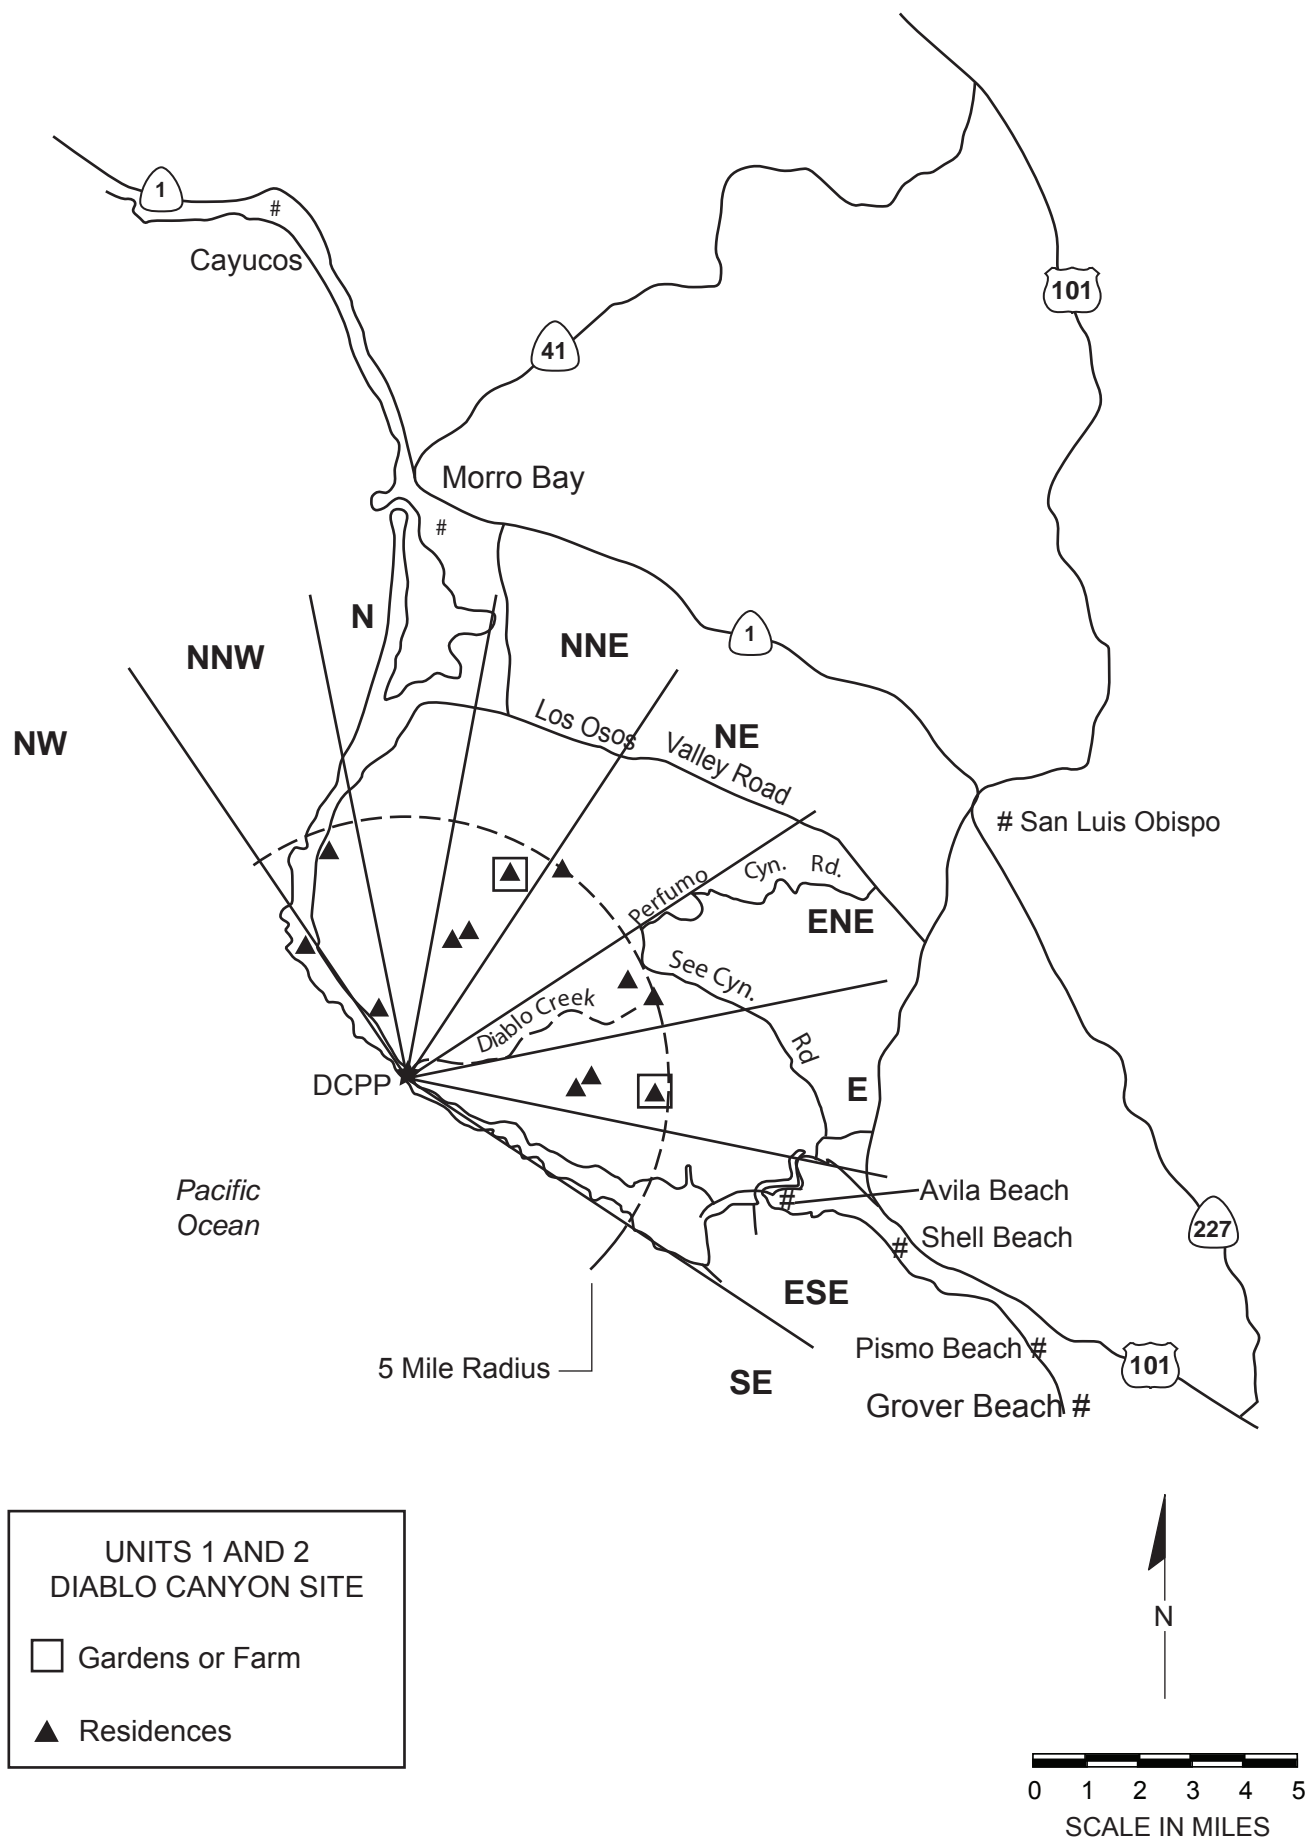


Units 1 and 2 Diablo Canyon Power Plant Land Use Census.

This page intentionally left blank.

9.0 DCPD WIND ROSE CHART

This page intentionally left blank.

**Joint Frequency Distribution
Wind Speed and Wind Direction
Diablo Canyon Power Plant
10 Meter Level Year 2020**

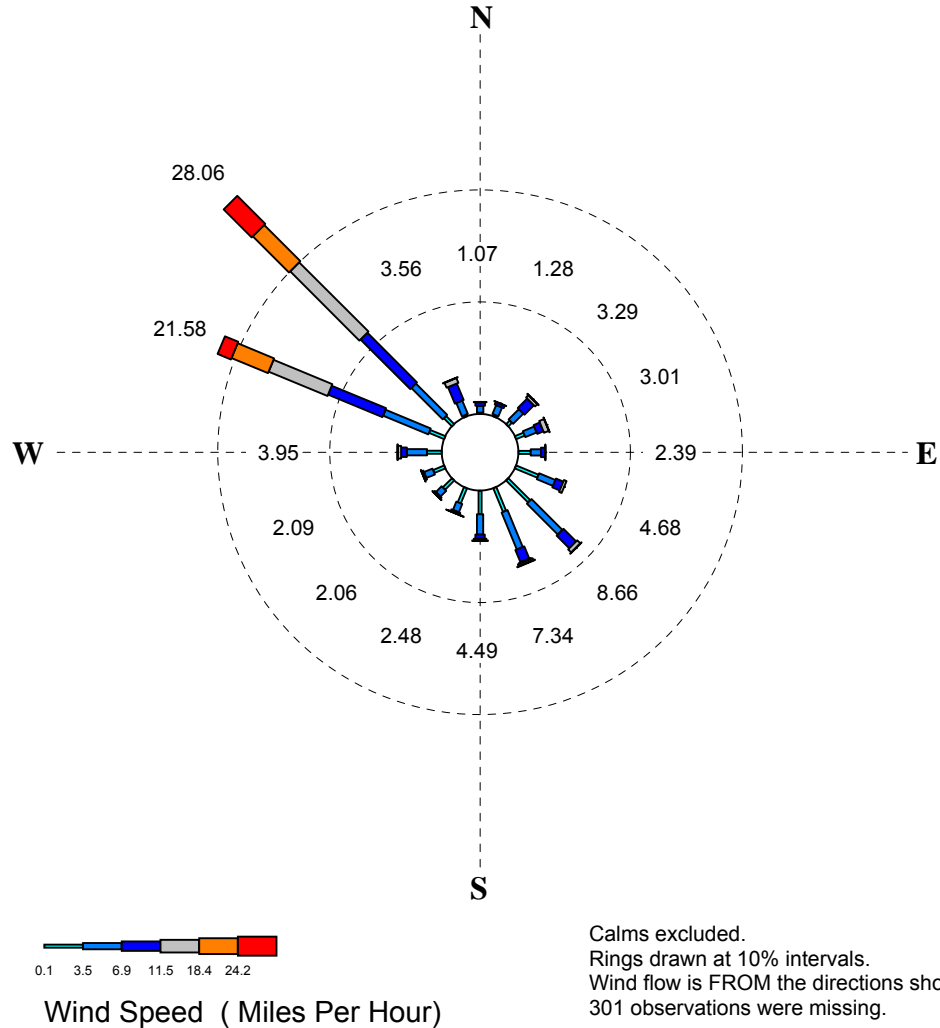

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)

LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	0.12	0.61	0.32	0.02	0.00	0.00
NNE	0.16	0.86	0.24	0.02	0.00	0.00
NE	0.46	1.30	1.19	0.31	0.04	0.00
ENE	0.83	1.08	0.60	0.47	0.02	0.00
E	1.08	0.91	0.35	0.04	0.01	0.00
ESE	2.17	1.56	0.72	0.24	0.00	0.00
SE	2.77	3.89	1.59	0.39	0.02	0.00
SSE	2.29	3.55	1.19	0.08	0.19	0.05

TOTAL OBS = 8483 MISSING OBS = 301

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)



LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	2.10	1.82	0.38	0.15	0.05	0.00
SSW	1.46	0.80	0.18	0.02	0.00	0.01
SW	1.16	0.72	0.15	0.04	0.00	0.00
WSW	1.07	0.81	0.19	0.01	0.00	0.00
W	1.31	1.79	0.52	0.29	0.04	0.00
WNW	1.47	4.37	5.25	5.68	3.52	1.28
NW	1.03	3.95	6.26	8.74	4.56	3.52
NNW	0.16	1.28	1.60	0.47	0.04	0.00

CALM OBS = 0

This page intentionally left blank.

**Joint Frequency Distribution
Wind Speed and Wind Direction
Diablo Canyon Power Plant
10 Meter Level 2016-2020**

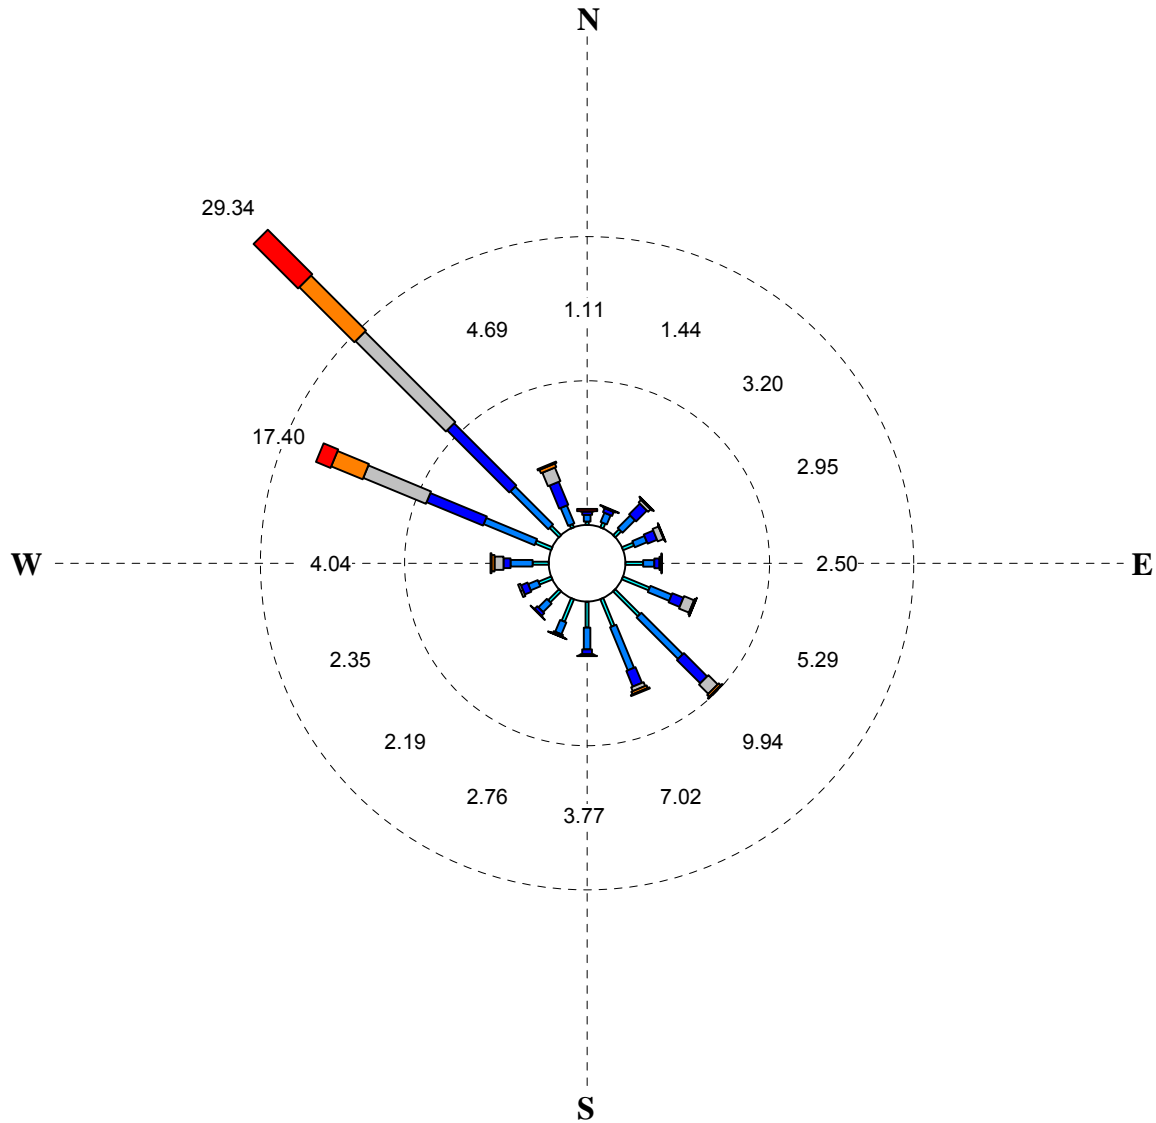

Wind Speed (Miles Per Hour)

Calms excluded.
Rings drawn at 10% intervals.
Wind flow is FROM the directions shown.
503 observations were missing.

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)

LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
N	0.24	0.46	0.23	0.02	0.00	0.16
NNE	0.36	0.69	0.30	0.05	0.00	0.05
NE	0.58	1.22	1.07	0.25	0.05	0.03
ENE	0.82	0.92	0.72	0.44	0.03	0.02
E	1.22	0.78	0.35	0.13	0.00	0.02
ESE	1.99	1.60	0.83	0.75	0.12	0.01
SE	2.43	4.06	2.29	0.91	0.18	0.07
SSE	2.05	3.23	1.18	0.29	0.20	0.07

TOTAL OBS = 43345 MISSING OBS = 503

PERCENT OCCURRENCE: Wind Speed (Miles Per Hour)

LOWER BOUND OF CATEGORY

DIR	0.1	3.5	6.9	11.5	18.4	24.2
S	1.79	1.51	0.33	0.08	0.03	0.02
SSW	1.69	0.88	0.14	0.03	0.01	0.02
SW	1.07	0.84	0.26	0.02	0.00	0.01
WSW	0.96	0.72	0.50	0.17	0.00	0.00
W	1.12	1.53	0.49	0.62	0.21	0.06
WNW	1.19	3.81	4.24	4.70	2.36	1.09
NW	0.93	3.72	6.10	8.86	5.38	4.36
NNW	0.25	1.36	1.73	1.01	0.25	0.10

CALM OBS = 0

This page intentionally left blank.

10.0 REFERENCES

1. NRC Radiological Assessment Branch Technical Position on Environmental Monitoring, Revision 1, November 1979
2. NUREG-1301 "Offsite Dose Calculation Manual Guidance: Standard Radiological Effluent Controls for Pressurized Water Reactors"
3. REG GUIDE 4.1 (Rev 1) "Programs for Monitoring Radioactivity in the Environs of Nuclear Power Plants"
4. REG GUIDE 4.15 (Rev 1) "Quality Assurance for Radiological Monitoring Programs (Normal Operations) – Effluent Streams and the Environment"
5. NRC Regulatory Issue Summary 2008-03, "Return/Re-use of Previously Discharged Radioactive Effluents"; February 13, 2008
6. ANSI/HPS N13.37-2014, "Environmental Dosimetry - Criteria for System Design and Implementation"
7. NEI 07-07, "Industry Groundwater Protection Initiative – Final Guidance Document, Rev 1", March 2019
8. DCPD Program Directive, CY2, "Radiological Monitoring and Controls Program."
9. DCPD Interdepartmental Administrative Procedure (IDAP), RP1.ID11, "Environmental Radiological Monitoring Procedure."
10. DCPD Interdepartmental Administrative Procedure (IDAP), RP1.ID13, "DCPD Groundwater Protection Initiative Program."
11. "Groundwater Gradient Analysis", by Entrix Corporation, March 2010
12. "Groundwater Gradient Analysis", by Cardno/Entrix Corporation, June 2012
13. "Diablo Canyon Power Plant Site Conceptual Model Report", by ERM July 30, 2014

This page intentionally left blank.

APPENDIX A

ANALYTICAL SAMPLE RESULTS

2020 DCPD REMP Analysis Results Appendix A

OS2 North Gate - Air Cartridge

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
OS2 North Gate(500231017) - AC	4-Jan-20	Iodine-131	-3.13E-03	5.38E-03	3.98E-03	pCi/m3
OS2 North Gate(500490008) - AC	11-Jan-20	Iodine-131	1.91E-03	1.05E-02	6.18E-03	pCi/m3
OS2 North Gate(501031013) - AC	18-Jan-20	Iodine-131	3.05E-03	1.07E-02	5.99E-03	pCi/m3
OS2 North Gate(502000015) - AC	25-Jan-20	Iodine-131	-3.32E-03	6.65E-03	4.62E-03	pCi/m3
OS2 North Gate(502411013) - AC	1-Feb-20	Iodine-131	2.92E-03	7.47E-03	4.13E-03	pCi/m3
OS2 North Gate(503155015) - AC	8-Feb-20	Iodine-131	9.77E-04	9.77E-03	5.70E-03	pCi/m3
OS2 North Gate(503851013) - AC	15-Feb-20	Iodine-131	-2.78E-03	6.21E-03	4.43E-03	pCi/m3
OS2 North Gate(504528013) - AC	22-Feb-20	Iodine-131	5.29E-04	7.55E-03	4.27E-03	pCi/m3
OS2 North Gate(505332008) - AC	29-Feb-20	Iodine-131	1.94E-03	8.10E-03	4.49E-03	pCi/m3
OS2 North Gate(505759015) - AC	7-Mar-20	Iodine-131	2.09E-04	8.91E-03	5.13E-03	pCi/m3
OS2 North Gate(506435015) - AC	14-Mar-20	Iodine-131	1.58E-03	8.32E-03	4.73E-03	pCi/m3
OS2 North Gate(507015013) - AC	21-Mar-20	Iodine-131	2.11E-03	9.55E-03	5.47E-03	pCi/m3
OS2 North Gate(507592008) - AC	27-Mar-20	Iodine-131	1.22E-03	7.34E-03	4.07E-03	pCi/m3
OS2 North Gate(508867013) - AC	4-Apr-20	Iodine-131	2.56E-03	8.77E-03	4.83E-03	pCi/m3
OS2 North Gate(508984017) - AC	11-Apr-20	Iodine-131	1.31E-04	9.52E-03	6.09E-03	pCi/m3
OS2 North Gate(509370017) - AC	18-Apr-20	Iodine-131	1.75E-03	9.42E-03	5.22E-03	pCi/m3
OS2 North Gate(509745008) - AC	25-Apr-20	Iodine-131	1.16E-03	1.08E-02	6.37E-03	pCi/m3
OS2 North Gate(510179013) - AC	2-May-20	Iodine-131	-1.86E-03	8.52E-03	5.58E-03	pCi/m3
OS2 North Gate(510640013) - AC	9-May-20	Iodine-131	-4.79E-03	6.86E-03	5.19E-03	pCi/m3
OS2 North Gate(510747015) - AC	16-May-20	Iodine-131	3.15E-03	7.90E-03	4.48E-03	pCi/m3
OS2 North Gate(511437013) - AC	23-May-20	Iodine-131	-6.29E-04	8.07E-03	4.80E-03	pCi/m3
OS2 North Gate(512099013) - AC	30-May-20	Iodine-131	2.55E-05	6.88E-03	4.58E-03	pCi/m3
OS2 North Gate(512380013) - AC	6-Jun-20	Iodine-131	-3.95E-03	9.20E-03	6.38E-03	pCi/m3
OS2 North Gate(513083017) - AC	13-Jun-20	Iodine-131	1.84E-03	1.21E-02	6.80E-03	pCi/m3
OS2 North Gate(513584013) - AC	20-Jun-20	Iodine-131	1.12E-03	1.23E-02	7.10E-03	pCi/m3
OS2 North Gate(514894011) - AC	27-Jun-20	Iodine-131	-4.15E-03	5.86E-03	4.86E-03	pCi/m3
OS2 North Gate(514398015) - AC	4-Jul-20	Iodine-131	-8.39E-04	8.75E-03	5.24E-03	pCi/m3
OS2 North Gate(514716021) - AC	11-Jul-20	Iodine-131	4.39E-03	1.04E-02	5.65E-03	pCi/m3
OS2 North Gate(515649017) - AC	18-Jul-20	Iodine-131	3.28E-04	9.38E-03	5.48E-03	pCi/m3
OS2 North Gate(517082013) - AC	25-Jul-20	Iodine-131	-1.04E-03	7.95E-03	4.76E-03	pCi/m3
OS2 North Gate(516773013) - AC	1-Aug-20	Iodine-131	-5.19E-03	6.96E-03	5.95E-03	pCi/m3
OS2 North Gate(517339038) - AC	8-Aug-20	Iodine-131	-1.07E-03	8.43E-03	5.02E-03	pCi/m3
OS2 North Gate(517997017) - AC	15-Aug-20	Iodine-131	3.40E-03	8.86E-03	5.05E-03	pCi/m3
OS2 North Gate(518816027) - AC	22-Aug-20	Iodine-131	-2.55E-05	1.21E-02	7.23E-03	pCi/m3
OS2 North Gate(518822025) - AC	29-Aug-20	Iodine-131	2.54E-03	1.15E-02	6.32E-03	pCi/m3
OS2 North Gate(520288015) - AC	5-Sep-20	Iodine-131	1.39E-03	6.16E-03	3.29E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

OS2 North Gate(520368013) - AC	12-Sep-20	Iodine-131	1.13E-02	1.35E-02	1.44E-02	pCi/m3
OS2 North Gate(521272013) - AC	19-Sep-20	Iodine-131	9.10E-04	1.42E-02	8.15E-03	pCi/m3
OS2 North Gate(521863013) - AC	26-Sep-20	Iodine-131	-6.68E-03	9.45E-03	7.59E-03	pCi/m3
OS2 North Gate(522576017) - AC	3-Oct-20	Iodine-131	4.46E-03	1.48E-02	8.15E-03	pCi/m3
OS2 North Gate(524007015) - AC	10-Oct-20	Iodine-131	-3.22E-03	9.23E-03	6.12E-03	pCi/m3
OS2 North Gate(524009008) - AC	17-Oct-20	Iodine-131	3.89E-04	7.56E-03	4.29E-03	pCi/m3
OS2 North Gate(524695013) - AC	24-Oct-20	Iodine-131	1.89E-03	9.78E-03	5.39E-03	pCi/m3
OS2 North Gate(525830015) - AC	31-Oct-20	Iodine-131	3.75E-03	9.78E-03	5.78E-03	pCi/m3
OS2 North Gate(526380008) - AC	7-Nov-20	Iodine-131	-9.61E-04	1.01E-02	6.04E-03	pCi/m3
OS2 North Gate(527613015) - AC	14-Nov-20	Iodine-131	-1.54E-03	6.83E-03	4.36E-03	pCi/m3
OS2 North Gate(527712015) - AC	21-Nov-20	Iodine-131	1.74E-03	1.26E-02	7.20E-03	pCi/m3
OS2 North Gate(528790008) - AC	28-Nov-20	Iodine-131	-8.15E-04	8.42E-03	4.98E-03	pCi/m3
OS2 North Gate(528845017) - AC	5-Dec-20	Iodine-131	1.94E-03	1.62E-02	9.67E-03	pCi/m3
OS2 North Gate(529341015) - AC	12-Dec-20	Iodine-131	2.41E-04	6.19E-03	3.90E-03	pCi/m3
OS2 North Gate(530196017) - AC	19-Dec-20	Iodine-131	-6.13E-04	7.97E-03	4.72E-03	pCi/m3
OS2 North Gate(530951015) - AC	25-Dec-20	Iodine-131	-1.32E-03	8.19E-03	5.05E-03	pCi/m3

OS2 North Gate - Air Carbon-14

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
OS2 North Gate(500231019) - AC14	4-Jan-20	Carbon-14	8.31E-08	9.99E-08	6.10E-08	uCi/m3
OS2 North Gate(500490010) - AC14	11-Jan-20	Carbon-14	6.12E-08	1.17E-07	7.10E-08	uCi/m3
OS2 North Gate(501031015) - AC14	18-Jan-20	Carbon-14	1.02E-07	1.16E-07	7.12E-08	uCi/m3
OS2 North Gate(502000017) - AC14	25-Jan-20	Carbon-14	1.04E-07	1.23E-07	7.53E-08	uCi/m3
OS2 North Gate(502411015) - AC14	1-Feb-20	Carbon-14	4.88E-08	1.39E-07	8.34E-08	uCi/m3
OS2 North Gate(503155019) - AC14	8-Feb-20	Carbon-14	4.27E-09	1.17E-07	7.00E-08	uCi/m3
OS2 North Gate(503851015) - AC14	15-Feb-20	Carbon-14	1.04E-07	1.32E-07	8.08E-08	uCi/m3
OS2 North Gate(504528015) - AC14	22-Feb-20	Carbon-14	2.10E-08	1.27E-07	7.61E-08	uCi/m3
OS2 North Gate(505332010) - AC14	29-Feb-20	Carbon-14	9.41E-08	1.27E-07	7.72E-08	uCi/m3
OS2 North Gate(505759017) - AC14	7-Mar-20	Carbon-14	2.87E-08	1.43E-07	8.55E-08	uCi/m3
OS2 North Gate(506435017) - AC14	14-Mar-20	Carbon-14	9.99E-08	1.25E-07	7.65E-08	uCi/m3
OS2 North Gate(507015015) - AC14	21-Mar-20	Carbon-14	5.12E-08	1.54E-07	9.26E-08	uCi/m3
OS2 North Gate(507592010) - AC14	27-Mar-20	Carbon-14	6.09E-08	1.22E-07	7.35E-08	uCi/m3
OS2 North Gate(508867015) - AC14	4-Apr-20	Carbon-14	6.12E-08	1.13E-07	6.85E-08	uCi/m3
OS2 North Gate(508984019) - AC14	11-Apr-20	Carbon-14	4.79E-08	1.52E-07	9.16E-08	uCi/m3
OS2 North Gate(509370019) - AC14	18-Apr-20	Carbon-14	-4.73E-10	1.21E-07	7.20E-08	uCi/m3
OS2 North Gate(509745010) - AC14	25-Apr-20	Carbon-14	3.05E-09	1.25E-07	7.43E-08	uCi/m3
OS2 North Gate(510179015) - AC14	2-May-20	Carbon-14	-1.04E-08	1.32E-07	7.85E-08	uCi/m3
OS2 North Gate(510640015) - AC14	9-May-20	Carbon-14	9.12E-08	1.20E-07	7.32E-08	uCi/m3

2020 DCPD REMP Analysis Results Appendix A

OS2 North Gate(510747017) - AC14	16-May-20	Carbon-14	7.31E-08	1.32E-07	8.03E-08	uCi/m3
OS2 North Gate(511437015) - AC14	23-May-20	Carbon-14	1.28E-07	1.58E-07	9.68E-08	uCi/m3
OS2 North Gate(512099015) - AC14	30-May-20	Carbon-14	3.93E-08	1.24E-07	7.43E-08	uCi/m3
OS2 North Gate(512380015) - AC14	6-Jun-20	Carbon-14	1.05E-07	1.45E-07	8.85E-08	uCi/m3
OS2 North Gate(513083019) - AC14	13-Jun-20	Carbon-14	1.84E-08	1.25E-07	7.47E-08	uCi/m3
OS2 North Gate(513584015) - AC14	20-Jun-20	Carbon-14	3.04E-08	1.19E-07	7.15E-08	uCi/m3
OS2 North Gate(514894008) - AC14	27-Jun-20	Carbon-14	1.94E-08	1.51E-07	9.01E-08	uCi/m3
OS2 North Gate(514398017) - AC14	4-Jul-20	Carbon-14	-5.71E-08	1.40E-07	8.22E-08	uCi/m3
OS2 North Gate(514716023) - AC14	11-Jul-20	Carbon-14	-3.62E-08	1.54E-07	9.12E-08	uCi/m3
OS2 North Gate(515649019) - AC14	18-Jul-20	Carbon-14	8.87E-08	1.91E-07	1.16E-07	uCi/m3
OS2 North Gate(517082015) - AC14	25-Jul-20	Carbon-14	3.78E-08	1.31E-07	7.90E-08	uCi/m3
OS2 North Gate(516773015) - AC14	1-Aug-20	Carbon-14	1.57E-07	1.67E-07	1.02E-07	uCi/m3
OS2 North Gate(517339040) - AC14	8-Aug-20	Carbon-14	1.30E-07	1.48E-07	9.03E-08	uCi/m3
OS2 North Gate(517997021) - AC14	15-Aug-20	Carbon-14	2.24E-08	1.40E-07	8.39E-08	uCi/m3
OS2 North Gate(518816029) - AC14	22-Aug-20	Carbon-14	7.77E-08	1.37E-07	8.28E-08	uCi/m3
OS2 North Gate(518822027) - AC14	29-Aug-20	Carbon-14	5.29E-08	1.37E-07	8.22E-08	uCi/m3
OS2 North Gate(520288017) - AC14	5-Sep-20	Carbon-14	6.30E-08	1.39E-07	8.41E-08	uCi/m3
OS2 North Gate(520368015) - AC14	12-Sep-20	Carbon-14	1.38E-07	1.49E-07	9.09E-08	uCi/m3
OS2 North Gate(521272015) - AC14	19-Sep-20	Carbon-14	9.54E-08	1.42E-07	8.59E-08	uCi/m3
OS2 North Gate(521863015) - AC14	26-Sep-20	Carbon-14	1.66E-08	1.30E-07	7.75E-08	uCi/m3
OS2 North Gate(522576019) - AC14	3-Oct-20	Carbon-14	-1.62E-08	1.25E-07	7.43E-08	uCi/m3
OS2 North Gate(524007017) - AC14	10-Oct-20	Carbon-14	1.96E-07	2.18E-07	1.31E-07	uCi/m3
OS2 North Gate(524009010) - AC14	17-Oct-20	Carbon-14	2.07E-07	1.28E-07	8.07E-08	uCi/m3
OS2 North Gate(524695015) - AC14	24-Oct-20	Carbon-14	-8.93E-09	1.34E-07	7.98E-08	uCi/m3
OS2 North Gate(525830017) - AC14	31-Oct-20	Carbon-14	1.71E-08	1.28E-07	7.62E-08	uCi/m3
OS2 North Gate(526380010) - AC14	7-Nov-20	Carbon-14	-9.10E-08	1.74E-07	1.02E-07	uCi/m3
OS2 North Gate(527613017) - AC14	14-Nov-20	Carbon-14	-6.09E-08	1.19E-07	6.98E-08	uCi/m3
OS2 North Gate(527712017) - AC14	21-Nov-20	Carbon-14	-9.88E-08	1.55E-07	9.06E-08	uCi/m3
OS2 North Gate(528790010) - AC14	28-Nov-20	Carbon-14	-2.73E-08	1.16E-07	6.87E-08	uCi/m3
OS2 North Gate(528845019) - AC14	5-Dec-20	Carbon-14	-2.04E-08	1.35E-07	8.01E-08	uCi/m3
OS2 North Gate(529341017) - AC14	12-Dec-20	Carbon-14	-1.88E-08	1.36E-07	8.08E-08	uCi/m3
OS2 North Gate(530196019) - AC14	19-Dec-20	Carbon-14	-6.49E-08	1.58E-07	9.29E-08	uCi/m3
OS2 North Gate(530951017) - AC14	25-Dec-20	Carbon-14	-3.59E-08	1.32E-07	7.82E-08	uCi/m3

OS2 North Gate - Air Particulate

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
OS2 North Gate(500231018) - AP	4-Jan-20	BETA	2.44E-02	2.32E-03	1.00E-02	pCi/m3
OS2 North Gate(500490009) - AP	11-Jan-20	BETA	6.61E-03	2.17E-03	1.12E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

OS2 North Gate(501031014) - AP	18-Jan-20	BETA	1.72E-02	2.20E-03	1.03E-02	pCi/m3
OS2 North Gate(502000016) - AP	25-Jan-20	BETA	1.32E-02	2.25E-03	1.36E-02	pCi/m3
OS2 North Gate(502411014) - AP	1-Feb-20	BETA	1.26E-02	2.15E-03	1.15E-02	pCi/m3
OS2 North Gate(503155016) - AP	8-Feb-20	BETA	1.75E-02	2.18E-03	9.94E-03	pCi/m3
OS2 North Gate(503851014) - AP	15-Feb-20	BETA	3.09E-02	2.13E-03	1.09E-02	pCi/m3
OS2 North Gate(504528014) - AP	22-Feb-20	BETA	3.21E-02	2.08E-03	1.10E-02	pCi/m3
OS2 North Gate(505332009) - AP	29-Feb-20	BETA	2.01E-02	2.15E-03	1.40E-02	pCi/m3
OS2 North Gate(505759016) - AP	7-Mar-20	BETA	1.18E-02	2.21E-03	1.19E-02	pCi/m3
OS2 North Gate(506435016) - AP	14-Mar-20	BETA	1.17E-02	2.16E-03	9.49E-03	pCi/m3
OS2 North Gate(507015014) - AP	21-Mar-20	BETA	1.60E-02	2.70E-03	1.13E-02	pCi/m3
OS2 North Gate(507592009) - AP	27-Mar-20	BETA	1.80E-02	2.17E-03	1.04E-02	pCi/m3
OS2 North Gate(508867014) - AP	4-Apr-20	BETA	9.07E-03	2.28E-03	8.83E-03	pCi/m3
OS2 North Gate(508984018) - AP	11-Apr-20	BETA	7.46E-03	2.65E-03	1.52E-02	pCi/m3
OS2 North Gate(509370018) - AP	18-Apr-20	BETA	1.90E-02	2.17E-03	1.02E-02	pCi/m3
OS2 North Gate(509745009) - AP	25-Apr-20	BETA	1.09E-02	2.50E-03	1.30E-02	pCi/m3
OS2 North Gate(510179014) - AP	2-May-20	BETA	1.26E-02	2.19E-03	1.24E-02	pCi/m3
OS2 North Gate(510640014) - AP	9-May-20	BETA	1.28E-02	2.64E-03	1.13E-02	pCi/m3
OS2 North Gate(510747016) - AP	16-May-20	BETA	1.02E-02	2.59E-03	1.07E-02	pCi/m3
OS2 North Gate(511437014) - AP	23-May-20	BETA	1.05E-02	2.54E-03	1.13E-02	pCi/m3
OS2 North Gate(512099014) - AP	30-May-20	BETA	9.34E-03	1.96E-03	1.03E-02	pCi/m3
OS2 North Gate(512380014) - AP	6-Jun-20	BETA	1.01E-02	2.24E-03	1.08E-02	pCi/m3
OS2 North Gate(513083018) - AP	13-Jun-20	BETA	6.26E-03	2.23E-03	1.06E-02	pCi/m3
OS2 North Gate(513584014) - AP	20-Jun-20	BETA	5.85E-03	2.18E-03	1.12E-02	pCi/m3
OS2 North Gate(514894001) - AP	27-Jun-20	BETA	3.55E-03	2.79E-03	1.25E-02	pCi/m3
OS2 North Gate(514398016) - AP	4-Jul-20	BETA	5.71E-03	1.93E-03	8.49E-03	pCi/m3
OS2 North Gate(514716022) - AP	11-Jul-20	BETA	1.00E-02	2.43E-03	9.98E-03	pCi/m3
OS2 North Gate(515649018) - AP	18-Jul-20	BETA	9.43E-03	2.42E-03	1.26E-02	pCi/m3
OS2 North Gate(517082014) - AP	25-Jul-20	BETA	9.70E-03	2.03E-03	9.32E-03	pCi/m3
OS2 North Gate(516773014) - AP	1-Aug-20	BETA	6.22E-03	2.21E-03	1.01E-02	pCi/m3
OS2 North Gate(517339039) - AP	8-Aug-20	BETA	1.04E-02	2.30E-03	1.15E-02	pCi/m3
OS2 North Gate(517997018) - AP	15-Aug-20	BETA	1.44E-02	2.30E-03	1.20E-02	pCi/m3
OS2 North Gate(518816028) - AP	22-Aug-20	BETA	7.52E-03	2.84E-03	1.31E-02	pCi/m3
OS2 North Gate(518822026) - AP	29-Aug-20	BETA	1.47E-02	2.21E-03	1.01E-02	pCi/m3
OS2 North Gate(520288016) - AP	5-Sep-20	BETA	2.61E-02	2.34E-03	1.05E-02	pCi/m3
OS2 North Gate(520368014) - AP	12-Sep-20	BETA	2.51E-02	3.00E-03	1.63E-02	pCi/m3
OS2 North Gate(521272014) - AP	19-Sep-20	BETA	9.38E-03	2.96E-03	1.57E-02	pCi/m3
OS2 North Gate(521863014) - AP	26-Sep-20	BETA	9.27E-03	2.87E-03	1.66E-02	pCi/m3
OS2 North Gate(522576018) - AP	3-Oct-20	BETA	2.90E-02	3.11E-03	1.84E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

OS2 North Gate(524007016) - AP	10-Oct-20	BETA	2.33E-02	2.25E-03	1.10E-02	pCi/m3
OS2 North Gate(524009009) - AP	17-Oct-20	BETA	2.76E-02	1.98E-03	1.02E-02	pCi/m3
OS2 North Gate(524695014) - AP	24-Oct-20	BETA	3.96E-02	2.29E-03	1.21E-02	pCi/m3
OS2 North Gate(525830016) - AP	31-Oct-20	BETA	7.49E-02	2.24E-03	1.25E-02	pCi/m3
OS2 North Gate(526380009) - AP	7-Nov-20	BETA	2.57E-02	2.30E-03	1.18E-02	pCi/m3
OS2 North Gate(527613016) - AP	14-Nov-20	BETA	2.39E-02	2.07E-03	1.02E-02	pCi/m3
OS2 North Gate(527712016) - AP	21-Nov-20	BETA	2.69E-02	2.55E-03	1.33E-02	pCi/m3
OS2 North Gate(528790009) - AP	28-Nov-20	BETA	3.33E-02	1.98E-03	9.47E-03	pCi/m3
OS2 North Gate(528845018) - AP	5-Dec-20	BETA	6.45E-02	2.08E-03	1.13E-02	pCi/m3
OS2 North Gate(529341016) - AP	12-Dec-20	BETA	2.37E-02	2.07E-03	1.07E-02	pCi/m3
OS2 North Gate(530196018) - AP	19-Dec-20	BETA	3.14E-02	2.82E-03	1.58E-02	pCi/m3
OS2 North Gate(530951016) - AP	25-Dec-20	BETA	2.90E-02	2.21E-03	1.03E-02	pCi/m3
OS2 North Gate(509974004) - AP	14-Feb-20	Cesium-134	1.63E-04	6.92E-04	3.83E-04	pCi/m3
OS2 North Gate(516372001) - AP	15-May-20	Cesium-134	1.72E-04	7.19E-04	3.92E-04	pCi/m3
OS2 North Gate(525316002) - AP	15-Aug-20	Cesium-134	2.93E-04	8.07E-04	4.54E-04	pCi/m3
OS2 North Gate(532027002) - AP	14-Nov-20	Cesium-134	-5.60E-05	4.23E-04	2.74E-04	pCi/m3
OS2 North Gate(509974004) - AP	14-Feb-20	Cesium-137	2.42E-04	6.42E-04	3.48E-04	pCi/m3
OS2 North Gate(516372001) - AP	15-May-20	Cesium-137	1.39E-04	5.52E-04	3.24E-04	pCi/m3
OS2 North Gate(525316002) - AP	15-Aug-20	Cesium-137	1.44E-04	6.31E-04	3.57E-04	pCi/m3
OS2 North Gate(532027002) - AP	14-Nov-20	Cesium-137	7.94E-05	4.86E-04	2.90E-04	pCi/m3

1A2 Blanchard Spring - Drinking Water

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	BETA	1.11E+00	3.58E+00	2.24E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	BETA	2.52E+00	2.57E+00	1.66E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	BETA	7.40E+00	2.75E+00	2.24E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	BETA	4.17E+00	1.88E+00	1.47E+00	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Barium-140	5.16E+00	9.90E+00	6.10E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Barium-140	-1.31E+00	8.18E+00	4.96E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Barium-140	-2.10E+00	8.89E+00	5.54E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Barium-140	-1.62E+00	8.50E+00	5.41E+00	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Cesium-134	2.52E-01	2.08E+00	1.25E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Cesium-134	-2.07E-01	2.02E+00	1.40E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Cesium-134	1.25E+00	2.25E+00	1.54E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Cesium-134	-2.48E-01	1.57E+00	9.46E-01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Cesium-137	4.30E-01	1.97E+00	1.31E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Cesium-137	4.28E-01	2.07E+00	1.23E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Cesium-137	-1.13E-01	1.81E+00	1.25E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Cesium-137	-1.04E-01	1.44E+00	8.44E-01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Cobalt-58	1.43E+00	2.00E+00	1.38E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Cobalt-58	-4.75E-01	1.80E+00	1.15E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Cobalt-58	-1.05E+00	1.99E+00	1.57E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Cobalt-58	7.45E-02	1.46E+00	9.73E-01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Cobalt-60	-1.10E+00	2.30E+00	2.09E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Cobalt-60	-1.16E-01	2.09E+00	1.24E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Cobalt-60	-2.48E-01	2.18E+00	1.34E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Cobalt-60	7.48E-01	1.62E+00	9.80E-01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Iodine-131	4.67E-02	8.03E-01	4.70E-01	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Iodine-131	-7.69E-02	5.74E-01	3.36E-01	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Iodine-131	7.20E-02	5.72E-01	3.35E-01	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Iodine-131	-2.59E-01	5.71E-01	3.77E-01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Iron-55	8.33E+00	6.41E+01	4.78E+01	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Iron-55	-2.28E+00	8.91E+01	6.54E+01	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Iron-55	1.05E+01	5.24E+01	3.42E+01	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Iron-55	4.54E+01	1.19E+02	8.24E+01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Iron-59	-2.00E+00	3.37E+00	2.46E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Iron-59	1.17E-01	3.86E+00	2.22E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Iron-59	1.07E+00	4.25E+00	2.48E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Iron-59	-1.15E+00	2.73E+00	1.82E+00	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Lanthanum-140	7.00E-01	3.17E+00	1.80E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Lanthanum-140	-2.27E-01	2.94E+00	1.78E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Lanthanum-140	-1.05E+00	3.48E+00	2.29E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Lanthanum-140	9.57E-01	3.05E+00	1.75E+00	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Manganese-54	-1.25E-01	2.01E+00	1.24E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Manganese-54	-1.84E-01	1.96E+00	1.21E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Manganese-54	9.96E-01	1.97E+00	1.27E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Manganese-54	-5.89E-01	1.36E+00	8.86E-01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Nickel-63	1.44E+01	3.00E+01	1.87E+01	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Nickel-63	-2.08E+00	3.26E+01	1.93E+01	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Nickel-63	-9.72E+00	4.20E+01	2.46E+01	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Nickel-63	6.77E+00	2.01E+01	1.23E+01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Niobium-95	1.70E+00	1.70E+00	1.23E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Niobium-95	5.97E-01	2.08E+00	1.38E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Niobium-95	3.36E-01	2.11E+00	1.44E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Niobium-95	3.36E-02	1.50E+00	9.97E-01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Total Strontium	-1.20E-02	8.40E-01	4.99E-01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Total Strontium	3.09E-01	1.03E+00	6.52E-01	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Total Strontium	-6.41E-01	1.26E+00	6.98E-01	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Total Strontium	-9.28E-01	1.51E+00	7.48E-01	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Tritium	5.18E+01	2.80E+02	1.70E+02	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Tritium	4.40E+01	2.44E+02	1.48E+02	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Tritium	-3.02E+01	3.26E+02	1.92E+02	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Tritium	8.74E+01	3.47E+02	2.12E+02	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Zinc-65	1.47E+00	4.18E+00	2.53E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Zinc-65	-6.85E-01	3.78E+00	2.58E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Zinc-65	5.37E-02	3.91E+00	2.63E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Zinc-65	-7.77E-01	2.90E+00	2.12E+00	pCi/L
1A2 Blanchard Spring(500502006) - DW	14-Jan-20	Zirconium-95	-8.48E-01	3.27E+00	2.09E+00	pCi/L
1A2 Blanchard Spring(508985001) - DW	14-Apr-20	Zirconium-95	-6.74E-01	3.15E+00	1.99E+00	pCi/L
1A2 Blanchard Spring(514713002) - DW	7-Jul-20	Zirconium-95	-1.31E-01	3.57E+00	2.21E+00	pCi/L
1A2 Blanchard Spring(523234001) - DW	6-Oct-20	Zirconium-95	-3.59E-01	2.81E+00	1.68E+00	pCi/L

1S1 Wastewater Pond - Air Cartridge

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
1S1 Wastewater Pond(500231015) - AC	4-Jan-20	Iodine-131	-3.74E-03	8.09E-03	5.79E-03	pCi/m3
1S1 Wastewater Pond(500490006) - AC	11-Jan-20	Iodine-131	2.72E-03	8.97E-03	4.87E-03	pCi/m3
1S1 Wastewater Pond(501031011) - AC	18-Jan-20	Iodine-131	-8.34E-04	7.76E-03	4.61E-03	pCi/m3
1S1 Wastewater Pond(502000013) - AC	25-Jan-20	Iodine-131	-1.92E-04	7.21E-03	4.32E-03	pCi/m3
1S1 Wastewater Pond(502411011) - AC	1-Feb-20	Iodine-131	2.67E-03	8.23E-03	4.69E-03	pCi/m3
1S1 Wastewater Pond(503155013) - AC	8-Feb-20	Iodine-131	-7.36E-04	7.50E-03	4.90E-03	pCi/m3
1S1 Wastewater Pond(503851011) - AC	15-Feb-20	Iodine-131	1.84E-03	1.07E-02	5.95E-03	pCi/m3
1S1 Wastewater Pond(504528011) - AC	22-Feb-20	Iodine-131	1.90E-03	8.39E-03	4.75E-03	pCi/m3
1S1 Wastewater Pond(505332006) - AC	29-Feb-20	Iodine-131	-1.33E-03	8.54E-03	5.12E-03	pCi/m3
1S1 Wastewater Pond(505759013) - AC	7-Mar-20	Iodine-131	2.08E-04	7.40E-03	4.22E-03	pCi/m3
1S1 Wastewater Pond(506435013) - AC	14-Mar-20	Iodine-131	-1.92E-03	6.25E-03	4.23E-03	pCi/m3
1S1 Wastewater Pond(507015011) - AC	21-Mar-20	Iodine-131	1.83E-03	1.10E-02	6.07E-03	pCi/m3
1S1 Wastewater Pond(507592006) - AC	27-Mar-20	Iodine-131	4.62E-03	8.31E-03	4.53E-03	pCi/m3
1S1 Wastewater Pond(508867011) - AC	4-Apr-20	Iodine-131	1.15E-04	6.64E-03	3.80E-03	pCi/m3
1S1 Wastewater Pond(508984015) - AC	11-Apr-20	Iodine-131	3.71E-03	8.77E-03	4.67E-03	pCi/m3
1S1 Wastewater Pond(509370015) - AC	18-Apr-20	Iodine-131	2.02E-03	9.54E-03	5.38E-03	pCi/m3
1S1 Wastewater Pond(509745006) - AC	25-Apr-20	Iodine-131	1.59E-03	8.72E-03	4.84E-03	pCi/m3
1S1 Wastewater Pond(510179011) - AC	2-May-20	Iodine-131	-5.07E-03	8.17E-03	6.15E-03	pCi/m3
1S1 Wastewater Pond(510640011) - AC	9-May-20	Iodine-131	-3.25E-03	6.92E-03	4.89E-03	pCi/m3
1S1 Wastewater Pond(510747013) - AC	16-May-20	Iodine-131	-2.04E-03	6.87E-03	4.38E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

1S1 Wastewater Pond(511437011) - AC	23-May-20	Iodine-131	7.92E-04	9.57E-03	5.40E-03	pCi/m3
1S1 Wastewater Pond(512099011) - AC	30-May-20	Iodine-131	4.27E-03	9.08E-03	4.95E-03	pCi/m3
1S1 Wastewater Pond(512380011) - AC	6-Jun-20	Iodine-131	-3.18E-03	7.78E-03	5.28E-03	pCi/m3
1S1 Wastewater Pond(513083015) - AC	13-Jun-20	Iodine-131	-1.11E-03	5.82E-03	3.58E-03	pCi/m3
1S1 Wastewater Pond(513584011) - AC	20-Jun-20	Iodine-131	-2.60E-03	1.37E-02	8.52E-03	pCi/m3
1S1 Wastewater Pond(514894012) - AC	27-Jun-20	Iodine-131	1.89E-03	8.35E-03	4.55E-03	pCi/m3
1S1 Wastewater Pond(514398013) - AC	4-Jul-20	Iodine-131	3.03E-03	9.23E-03	5.13E-03	pCi/m3
1S1 Wastewater Pond(514716019) - AC	11-Jul-20	Iodine-131	-2.97E-03	9.10E-03	6.02E-03	pCi/m3
1S1 Wastewater Pond(515649015) - AC	18-Jul-20	Iodine-131	3.91E-04	1.34E-02	7.81E-03	pCi/m3
1S1 Wastewater Pond(517082011) - AC	25-Jul-20	Iodine-131	2.22E-03	7.68E-03	4.27E-03	pCi/m3
1S1 Wastewater Pond(516773011) - AC	1-Aug-20	Iodine-131	-2.10E-03	9.56E-03	6.26E-03	pCi/m3
1S1 Wastewater Pond(517339030) - AC	8-Aug-20	Iodine-131	-1.77E-03	6.73E-03	4.44E-03	pCi/m3
1S1 Wastewater Pond(517997015) - AC	15-Aug-20	Iodine-131	3.63E-04	6.60E-03	3.78E-03	pCi/m3
1S1 Wastewater Pond(518816025) - AC	22-Aug-20	Iodine-131	-1.31E-03	1.17E-02	7.01E-03	pCi/m3
1S1 Wastewater Pond(518822023) - AC	29-Aug-20	Iodine-131	1.55E-03	1.18E-02	6.71E-03	pCi/m3
1S1 Wastewater Pond(520288013) - AC	5-Sep-20	Iodine-131	-1.53E-03	8.09E-03	5.08E-03	pCi/m3
1S1 Wastewater Pond(520368011) - AC	12-Sep-20	Iodine-131	3.03E-03	1.97E-02	1.12E-02	pCi/m3
1S1 Wastewater Pond(521272011) - AC	19-Sep-20	Iodine-131	-1.01E-02	2.14E-02	1.46E-02	pCi/m3
1S1 Wastewater Pond(521863011) - AC	26-Sep-20	Iodine-131	-9.17E-03	1.32E-02	1.49E-02	pCi/m3
1S1 Wastewater Pond(522576015) - AC	3-Oct-20	Iodine-131	-2.93E-03	1.56E-02	9.67E-03	pCi/m3
1S1 Wastewater Pond(524007013) - AC	10-Oct-20	Iodine-131	3.95E-03	1.09E-02	6.17E-03	pCi/m3
1S1 Wastewater Pond(524009006) - AC	17-Oct-20	Iodine-131	8.50E-03	1.37E-02	7.71E-03	pCi/m3
1S1 Wastewater Pond(524695011) - AC	24-Oct-20	Iodine-131	1.32E-03	1.27E-02	7.27E-03	pCi/m3
1S1 Wastewater Pond(525830013) - AC	31-Oct-20	Iodine-131	9.19E-03	9.19E-03	7.22E-03	pCi/m3
1S1 Wastewater Pond(526380006) - AC	7-Nov-20	Iodine-131	1.86E-03	1.35E-02	7.66E-03	pCi/m3
1S1 Wastewater Pond(527613013) - AC	14-Nov-20	Iodine-131	1.99E-03	8.66E-03	4.94E-03	pCi/m3
1S1 Wastewater Pond(527712013) - AC	21-Nov-20	Iodine-131	-3.01E-03	1.49E-02	1.02E-02	pCi/m3
1S1 Wastewater Pond(528790006) - AC	28-Nov-20	Iodine-131	-8.37E-04	6.13E-03	3.80E-03	pCi/m3
1S1 Wastewater Pond(528845015) - AC	5-Dec-20	Iodine-131	3.07E-03	1.21E-02	6.71E-03	pCi/m3
1S1 Wastewater Pond(529341013) - AC	12-Dec-20	Iodine-131	1.81E-04	6.93E-03	3.97E-03	pCi/m3
1S1 Wastewater Pond(530196015) - AC	19-Dec-20	Iodine-131	-6.10E-03	5.43E-03	5.29E-03	pCi/m3
1S1 Wastewater Pond(530951013) - AC	25-Dec-20	Iodine-131	-4.51E-03	8.35E-03	6.61E-03	pCi/m3

1S1 Wastewater Pond - Air Particulate

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
1S1 Wastewater Pond(500231016) - AP	4-Jan-20	BETA	2.16E-02	1.82E-03	9.68E-03	pCi/m3
1S1 Wastewater Pond(500490007) - AP	11-Jan-20	BETA	6.94E-03	2.06E-03	1.11E-02	pCi/m3
1S1 Wastewater Pond(501031012) - AP	18-Jan-20	BETA	1.80E-02	2.73E-03	1.06E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

1S1 Wastewater Pond(502000014) - AP	25-Jan-20	BETA	7.74E-03	2.20E-03	1.39E-02	pCi/m3
1S1 Wastewater Pond(502411012) - AP	1-Feb-20	BETA	1.08E-02	2.03E-03	1.17E-02	pCi/m3
1S1 Wastewater Pond(503155014) - AP	8-Feb-20	BETA	2.22E-02	2.02E-03	1.00E-02	pCi/m3
1S1 Wastewater Pond(503851012) - AP	15-Feb-20	BETA	3.11E-02	2.16E-03	1.09E-02	pCi/m3
1S1 Wastewater Pond(504528012) - AP	22-Feb-20	BETA	3.33E-02	2.33E-03	1.13E-02	pCi/m3
1S1 Wastewater Pond(505332007) - AP	29-Feb-20	BETA	1.80E-02	2.07E-03	1.39E-02	pCi/m3
1S1 Wastewater Pond(505759014) - AP	7-Mar-20	BETA	1.11E-02	2.04E-03	1.17E-02	pCi/m3
1S1 Wastewater Pond(506435014) - AP	14-Mar-20	BETA	1.48E-02	2.01E-03	9.55E-03	pCi/m3
1S1 Wastewater Pond(507015012) - AP	21-Mar-20	BETA	1.80E-02	3.14E-03	1.16E-02	pCi/m3
1S1 Wastewater Pond(507592007) - AP	27-Mar-20	BETA	2.01E-02	2.16E-03	1.05E-02	pCi/m3
1S1 Wastewater Pond(508867012) - AP	4-Apr-20	BETA	9.02E-03	1.96E-03	8.67E-03	pCi/m3
1S1 Wastewater Pond(508984016) - AP	11-Apr-20	BETA	8.91E-03	2.38E-03	1.50E-02	pCi/m3
1S1 Wastewater Pond(509370016) - AP	18-Apr-20	BETA	1.69E-02	1.90E-03	1.01E-02	pCi/m3
1S1 Wastewater Pond(509745007) - AP	25-Apr-20	BETA	9.96E-03	2.22E-03	1.30E-02	pCi/m3
1S1 Wastewater Pond(510179012) - AP	2-May-20	BETA	1.09E-02	2.70E-03	1.21E-02	pCi/m3
1S1 Wastewater Pond(510640012) - AP	9-May-20	BETA	2.13E-02	2.39E-03	1.16E-02	pCi/m3
1S1 Wastewater Pond(510747014) - AP	16-May-20	BETA	8.92E-03	2.27E-03	1.06E-02	pCi/m3
1S1 Wastewater Pond(511437012) - AP	23-May-20	BETA	1.32E-02	2.47E-03	1.13E-02	pCi/m3
1S1 Wastewater Pond(512099012) - AP	30-May-20	BETA	8.99E-03	2.01E-03	1.04E-02	pCi/m3
1S1 Wastewater Pond(512380012) - AP	6-Jun-20	BETA	1.08E-02	2.04E-03	1.06E-02	pCi/m3
1S1 Wastewater Pond(513083016) - AP	13-Jun-20	BETA	7.89E-03	1.96E-03	1.01E-02	pCi/m3
1S1 Wastewater Pond(513584012) - AP	20-Jun-20	BETA	4.43E-03	2.43E-03	1.11E-02	pCi/m3
1S1 Wastewater Pond(514894002) - AP	27-Jun-20	BETA	3.82E-03	2.50E-03	1.28E-02	pCi/m3
1S1 Wastewater Pond(514398014) - AP	4-Jul-20	BETA	7.38E-03	1.95E-03	8.64E-03	pCi/m3
1S1 Wastewater Pond(514716020) - AP	11-Jul-20	BETA	9.37E-03	2.18E-03	1.00E-02	pCi/m3
1S1 Wastewater Pond(515649016) - AP	18-Jul-20	BETA	8.52E-03	2.63E-03	1.36E-02	pCi/m3
1S1 Wastewater Pond(517082012) - AP	25-Jul-20	BETA	1.06E-02	2.27E-03	9.65E-03	pCi/m3
1S1 Wastewater Pond(516773012) - AP	1-Aug-20	BETA	2.86E-03	2.73E-03	1.06E-02	pCi/m3
1S1 Wastewater Pond(517339031) - AP	8-Aug-20	BETA	7.78E-03	2.88E-03	1.18E-02	pCi/m3
1S1 Wastewater Pond(517997016) - AP	15-Aug-20	BETA	1.33E-02	2.32E-03	1.21E-02	pCi/m3
1S1 Wastewater Pond(518816026) - AP	22-Aug-20	BETA	7.42E-03	3.70E-03	1.59E-02	pCi/m3
1S1 Wastewater Pond(518822024) - AP	29-Aug-20	BETA	1.68E-02	2.33E-03	1.03E-02	pCi/m3
1S1 Wastewater Pond(520288014) - AP	5-Sep-20	BETA	2.77E-02	2.60E-03	1.09E-02	pCi/m3
1S1 Wastewater Pond(520368012) - AP	12-Sep-20	BETA	1.99E-02	3.48E-03	1.77E-02	pCi/m3
1S1 Wastewater Pond(521272012) - AP	19-Sep-20	BETA	1.36E-02	3.01E-03	1.60E-02	pCi/m3
1S1 Wastewater Pond(521863012) - AP	26-Sep-20	BETA	8.65E-03	3.08E-03	1.65E-02	pCi/m3
1S1 Wastewater Pond(522576016) - AP	3-Oct-20	BETA	3.02E-02	3.87E-03	2.11E-02	pCi/m3
1S1 Wastewater Pond(524007014) - AP	10-Oct-20	BETA	2.68E-02	2.36E-03	1.15E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

1S1 Wastewater Pond(524009007) - AP	17-Oct-20	BETA	2.35E-02	2.36E-03	1.08E-02	pCi/m3
1S1 Wastewater Pond(524695012) - AP	24-Oct-20	BETA	3.85E-02	2.55E-03	1.26E-02	pCi/m3
1S1 Wastewater Pond(525830014) - AP	31-Oct-20	BETA	7.01E-02	2.43E-03	1.26E-02	pCi/m3
1S1 Wastewater Pond(526380007) - AP	7-Nov-20	BETA	2.66E-02	2.52E-03	1.21E-02	pCi/m3
1S1 Wastewater Pond(527613014) - AP	14-Nov-20	BETA	2.75E-02	1.95E-03	1.08E-02	pCi/m3
1S1 Wastewater Pond(527712014) - AP	21-Nov-20	BETA	2.67E-02	2.75E-03	1.32E-02	pCi/m3
1S1 Wastewater Pond(528790007) - AP	28-Nov-20	BETA	3.24E-02	1.86E-03	9.92E-03	pCi/m3
1S1 Wastewater Pond(528845016) - AP	5-Dec-20	BETA	7.99E-02	2.26E-03	1.23E-02	pCi/m3
1S1 Wastewater Pond(529341014) - AP	12-Dec-20	BETA	2.55E-02	2.38E-03	1.21E-02	pCi/m3
1S1 Wastewater Pond(530196016) - AP	19-Dec-20	BETA	2.66E-02	2.56E-03	1.39E-02	pCi/m3
1S1 Wastewater Pond(530951014) - AP	25-Dec-20	BETA	2.28E-02	2.16E-03	1.02E-02	pCi/m3
1S1 Wastewater Pond(509974003) - AP	14-Feb-20	Cesium-134	1.99E-04	7.25E-04	3.81E-04	pCi/m3
1S1 Wastewater Pond(516372002) - AP	15-May-20	Cesium-134	-3.32E-04	5.23E-04	3.91E-04	pCi/m3
1S1 Wastewater Pond(525316003) - AP	15-Aug-20	Cesium-134	1.46E-04	4.31E-04	2.39E-04	pCi/m3
1S1 Wastewater Pond(532027003) - AP	14-Nov-20	Cesium-134	7.95E-05	5.71E-04	3.25E-04	pCi/m3
1S1 Wastewater Pond(509974003) - AP	14-Feb-20	Cesium-137	1.69E-04	6.87E-04	3.58E-04	pCi/m3
1S1 Wastewater Pond(516372002) - AP	15-May-20	Cesium-137	-2.60E-04	4.96E-04	3.63E-04	pCi/m3
1S1 Wastewater Pond(525316003) - AP	15-Aug-20	Cesium-137	4.34E-05	3.69E-04	2.10E-04	pCi/m3
1S1 Wastewater Pond(532027003) - AP	14-Nov-20	Cesium-137	-2.83E-04	3.33E-04	3.19E-04	pCi/m3

2F1 Morro Bay - Market Fish

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
2F1 Morro Bay(509770005) - FH Market	13-Apr-20	Cesium-134	9.40E-01	3.67E+00	2.20E+00	pCi/kg
2F1 Morro Bay(511002001) - FH Market	14-May-20	Cesium-134	9.96E-01	3.76E+00	2.25E+00	pCi/kg
2F1 Morro Bay(517473002) - FH Market	30-Jul-20	Cesium-134	-3.09E+00	1.69E+01	1.07E+01	pCi/kg
2F1 Morro Bay(523223005) - FH Market	27-Oct-20	Cesium-134	4.45E+00	1.66E+01	9.75E+00	pCi/kg
2F1 Morro Bay(509770005) - FH Market	13-Apr-20	Cesium-137	8.41E+00	2.95E+00	3.82E+00	pCi/kg
2F1 Morro Bay(511002001) - FH Market	14-May-20	Cesium-137	1.40E+01	3.48E+00	3.82E+00	pCi/kg
2F1 Morro Bay(517473002) - FH Market	30-Jul-20	Cesium-137	-1.48E+01	1.84E+01	1.85E+01	pCi/kg
2F1 Morro Bay(523223005) - FH Market	27-Oct-20	Cesium-137	-2.91E+00	1.54E+01	1.20E+01	pCi/kg
2F1 Morro Bay(509770005) - FH Market	13-Apr-20	Cobalt-58	-1.19E+00	3.12E+00	2.08E+00	pCi/kg
2F1 Morro Bay(511002001) - FH Market	14-May-20	Cobalt-58	-1.67E+00	3.14E+00	2.20E+00	pCi/kg
2F1 Morro Bay(517473002) - FH Market	30-Jul-20	Cobalt-58	9.05E+00	1.82E+01	1.10E+01	pCi/kg
2F1 Morro Bay(523223005) - FH Market	27-Oct-20	Cobalt-58	-4.85E+00	1.45E+01	9.51E+00	pCi/kg
2F1 Morro Bay(509770005) - FH Market	13-Apr-20	Cobalt-60	9.69E-01	3.69E+00	2.13E+00	pCi/kg
2F1 Morro Bay(511002001) - FH Market	14-May-20	Cobalt-60	4.52E-02	4.08E+00	2.39E+00	pCi/kg
2F1 Morro Bay(517473002) - FH Market	30-Jul-20	Cobalt-60	3.48E+00	1.98E+01	1.13E+01	pCi/kg
2F1 Morro Bay(523223005) - FH Market	27-Oct-20	Cobalt-60	-1.19E+01	1.66E+01	1.48E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

2F1 Morro Bay(509770005) - FH Market	13-Apr-20	Iron-59	-1.46E+00	8.30E+00	4.98E+00	pCi/kg
2F1 Morro Bay(511002001) - FH Market	14-May-20	Iron-59	-6.89E+00	8.57E+00	7.11E+00	pCi/kg
2F1 Morro Bay(517473002) - FH Market	30-Jul-20	Iron-59	-1.12E+01	3.15E+01	2.17E+01	pCi/kg
2F1 Morro Bay(523223005) - FH Market	27-Oct-20	Iron-59	-9.70E+00	3.28E+01	2.20E+01	pCi/kg
2F1 Morro Bay(509770005) - FH Market	13-Apr-20	Manganese-54	1.15E+00	3.41E+00	2.06E+00	pCi/kg
2F1 Morro Bay(511002001) - FH Market	14-May-20	Manganese-54	3.58E-01	3.73E+00	2.25E+00	pCi/kg
2F1 Morro Bay(517473002) - FH Market	30-Jul-20	Manganese-54	1.34E+01	1.76E+01	1.62E+01	pCi/kg
2F1 Morro Bay(523223005) - FH Market	27-Oct-20	Manganese-54	1.94E+00	1.35E+01	7.99E+00	pCi/kg
2F1 Morro Bay(509770005) - FH Market	13-Apr-20	Zinc-65	3.05E-01	8.24E+00	4.77E+00	pCi/kg
2F1 Morro Bay(511002001) - FH Market	14-May-20	Zinc-65	2.22E-01	8.81E+00	5.10E+00	pCi/kg
2F1 Morro Bay(517473002) - FH Market	30-Jul-20	Zinc-65	-1.11E+00	3.87E+01	2.41E+01	pCi/kg
2F1 Morro Bay(523223005) - FH Market	27-Oct-20	Zinc-65	-9.10E+00	3.64E+01	2.39E+01	pCi/kg

3C1 Household Garden - Vegetation

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
3C1 Household Garden(504709001) - VG Brdleaf	27-Feb-20	Cesium-134	6.66E+00	1.45E+01	8.53E+00	pCi/kg
3C1 Household Garden(510173002) - VG Brdleaf	30-Apr-20	Cesium-134	1.65E-01	9.18E+00	5.41E+00	pCi/kg
3C1 Household Garden(515133002) - VG Brdleaf	16-Jul-20	Cesium-134	1.62E+00	1.10E+01	6.57E+00	pCi/kg
3C1 Household Garden(524337002) - VG Brdleaf	22-Oct-20	Cesium-134	-7.94E-01	5.33E+00	3.21E+00	pCi/kg
3C1 Household Garden(525421001) - VG Brdleaf	26-Oct-20	Cesium-134	-1.46E+00	9.38E+00	5.84E+00	pCi/kg
3C1 Household Garden(504709001) - VG Brdleaf	27-Feb-20	Cesium-137	5.39E+00	1.32E+01	8.12E+00	pCi/kg
3C1 Household Garden(510173002) - VG Brdleaf	30-Apr-20	Cesium-137	6.07E-01	8.41E+00	4.87E+00	pCi/kg
3C1 Household Garden(515133002) - VG Brdleaf	16-Jul-20	Cesium-137	4.50E+00	1.08E+01	6.40E+00	pCi/kg
3C1 Household Garden(524337002) - VG Brdleaf	22-Oct-20	Cesium-137	1.82E+00	4.79E+00	2.80E+00	pCi/kg
3C1 Household Garden(525421001) - VG Brdleaf	26-Oct-20	Cesium-137	-3.54E+00	8.32E+00	5.52E+00	pCi/kg
3C1 Household Garden(504709001) - VG Brdleaf	27-Feb-20	Iodine-131	-7.85E+00	1.86E+01	1.21E+01	pCi/kg
3C1 Household Garden(510173002) - VG Brdleaf	30-Apr-20	Iodine-131	-2.83E+00	1.17E+01	7.36E+00	pCi/kg
3C1 Household Garden(515133002) - VG Brdleaf	16-Jul-20	Iodine-131	-6.41E+00	1.74E+01	1.09E+01	pCi/kg
3C1 Household Garden(524337002) - VG Brdleaf	22-Oct-20	Iodine-131	-4.81E+00	6.31E+00	4.65E+00	pCi/kg
3C1 Household Garden(525421001) - VG Brdleaf	26-Oct-20	Iodine-131	2.98E+00	1.04E+01	5.97E+00	pCi/kg

3C1 Household Garden - Fruit

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
3C1 Household Garden(504709003) - VG Fruit	27-Feb-20	Cesium-134	-6.16E-01	4.70E+00	2.80E+00	pCi/kg
3C1 Household Garden(510173003) - VG Fruit	30-Apr-20	Cesium-134	1.46E+00	6.55E+00	3.89E+00	pCi/kg
3C1 Household Garden(515133003) - VG Fruit	16-Jul-20	Cesium-134	4.16E-01	5.90E+00	3.60E+00	pCi/kg
3C1 Household Garden(524337003) - VG Fruit	22-Oct-20	Cesium-134	2.34E+00	6.17E+00	3.72E+00	pCi/kg
3C1 Household Garden(525421002) - VG Fruit	26-Oct-20	Cesium-134	3.77E-01	4.95E+00	3.00E+00	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

3C1 Household Garden(504709003) - VG Fruit	27-Feb-20	Cesium-137	4.29E-01	4.89E+00	2.99E+00	pCi/kg
3C1 Household Garden(510173003) - VG Fruit	30-Apr-20	Cesium-137	1.45E-01	6.74E+00	4.04E+00	pCi/kg
3C1 Household Garden(515133003) - VG Fruit	16-Jul-20	Cesium-137	2.46E+00	5.33E+00	3.20E+00	pCi/kg
3C1 Household Garden(524337003) - VG Fruit	22-Oct-20	Cesium-137	1.00E+00	5.17E+00	3.06E+00	pCi/kg
3C1 Household Garden(525421002) - VG Fruit	26-Oct-20	Cesium-137	-6.02E-01	4.90E+00	3.03E+00	pCi/kg
3C1 Household Garden(504709003) - VG Fruit	27-Feb-20	Iodine-131	2.84E+00	8.01E+00	4.82E+00	pCi/kg
3C1 Household Garden(510173003) - VG Fruit	30-Apr-20	Iodine-131	-2.19E+00	1.13E+01	6.70E+00	pCi/kg
3C1 Household Garden(515133003) - VG Fruit	16-Jul-20	Iodine-131	-8.36E-01	9.15E+00	5.36E+00	pCi/kg
3C1 Household Garden(524337003) - VG Fruit	22-Oct-20	Iodine-131	1.72E+00	7.69E+00	4.41E+00	pCi/kg
3C1 Household Garden(525421002) - VG Fruit	26-Oct-20	Iodine-131	6.28E-01	6.13E+00	3.56E+00	pCi/kg

5F1 SLO OEL - Air Cartridge

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
5F1 SLO OEL(500231001) - AC	4-Jan-20	Iodine-131	-3.69E-03	7.33E-03	5.32E-03	pCi/m3
5F1 SLO OEL(500490015) - AC	11-Jan-20	Iodine-131	-9.22E-05	7.46E-03	4.29E-03	pCi/m3
5F1 SLO OEL(501031001) - AC	18-Jan-20	Iodine-131	-1.19E-03	8.20E-03	5.02E-03	pCi/m3
5F1 SLO OEL(502000001) - AC	25-Jan-20	Iodine-131	2.99E-03	8.21E-03	4.42E-03	pCi/m3
5F1 SLO OEL(502411001) - AC	1-Feb-20	Iodine-131	5.89E-04	9.65E-03	5.63E-03	pCi/m3
5F1 SLO OEL(503155001) - AC	8-Feb-20	Iodine-131	1.29E-03	8.38E-03	4.85E-03	pCi/m3
5F1 SLO OEL(503851001) - AC	15-Feb-20	Iodine-131	1.68E-03	8.22E-03	4.95E-03	pCi/m3
5F1 SLO OEL(504528001) - AC	22-Feb-20	Iodine-131	2.78E-03	1.10E-02	6.18E-03	pCi/m3
5F1 SLO OEL(505332015) - AC	29-Feb-20	Iodine-131	3.54E-03	8.71E-03	4.86E-03	pCi/m3
5F1 SLO OEL(505759001) - AC	7-Mar-20	Iodine-131	4.19E-03	1.14E-02	6.48E-03	pCi/m3
5F1 SLO OEL(506435001) - AC	14-Mar-20	Iodine-131	7.70E-03	8.88E-03	1.89E-02	pCi/m3
5F1 SLO OEL(507015001) - AC	21-Mar-20	Iodine-131	5.73E-04	1.05E-02	5.94E-03	pCi/m3
5F1 SLO OEL(507592015) - AC	27-Mar-20	Iodine-131	1.44E-03	6.49E-03	3.49E-03	pCi/m3
5F1 SLO OEL(508867001) - AC	4-Apr-20	Iodine-131	-2.42E-03	6.25E-03	4.24E-03	pCi/m3
5F1 SLO OEL(508984001) - AC	11-Apr-20	Iodine-131	-3.03E-03	1.11E-02	7.29E-03	pCi/m3
5F1 SLO OEL(509370001) - AC	18-Apr-20	Iodine-131	-5.93E-04	7.34E-03	4.44E-03	pCi/m3
5F1 SLO OEL(509745001) - AC	25-Apr-20	Iodine-131	6.71E-03	6.71E-03	6.55E-03	pCi/m3
5F1 SLO OEL(510179001) - AC	2-May-20	Iodine-131	-1.24E-03	7.08E-03	4.36E-03	pCi/m3
5F1 SLO OEL(510640001) - AC	9-May-20	Iodine-131	-6.67E-04	4.84E-03	2.96E-03	pCi/m3
5F1 SLO OEL(510747001) - AC	16-May-20	Iodine-131	3.95E-03	1.02E-02	5.76E-03	pCi/m3
5F1 SLO OEL(511437001) - AC	23-May-20	Iodine-131	-7.53E-03	9.76E-03	7.41E-03	pCi/m3
5F1 SLO OEL(512099001) - AC	30-May-20	Iodine-131	1.64E-03	7.76E-03	4.88E-03	pCi/m3
5F1 SLO OEL(512380001) - AC	6-Jun-20	Iodine-131	-2.92E-03	8.07E-03	5.40E-03	pCi/m3
5F1 SLO OEL(513083001) - AC	13-Jun-20	Iodine-131	-2.21E-03	5.74E-03	3.94E-03	pCi/m3
5F1 SLO OEL(513584001) - AC	20-Jun-20	Iodine-131	-8.28E-03	1.33E-02	9.84E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

5F1 SLO OEL(514894013) - AC	27-Jun-20	Iodine-131	5.88E-03	1.05E-02	5.86E-03	pCi/m3
5F1 SLO OEL(514398001) - AC	4-Jul-20	Iodine-131	7.26E-04	6.63E-03	3.69E-03	pCi/m3
5F1 SLO OEL(514716001) - AC	11-Jul-20	Iodine-131	1.38E-03	1.10E-02	6.30E-03	pCi/m3
5F1 SLO OEL(515649001) - AC	18-Jul-20	Iodine-131	-7.21E-03	1.35E-02	9.79E-03	pCi/m3
5F1 SLO OEL(517082001) - AC	25-Jul-20	Iodine-131	-1.41E-03	7.92E-03	5.10E-03	pCi/m3
5F1 SLO OEL(516773001) - AC	1-Aug-20	Iodine-131	3.05E-03	1.04E-02	5.72E-03	pCi/m3
5F1 SLO OEL(517339001) - AC	8-Aug-20	Iodine-131	1.06E-03	6.99E-03	3.89E-03	pCi/m3
5F1 SLO OEL(517997001) - AC	15-Aug-20	Iodine-131	-6.84E-04	9.23E-03	5.58E-03	pCi/m3
5F1 SLO OEL(518816001) - AC	22-Aug-20	Iodine-131	-9.24E-04	7.40E-03	4.58E-03	pCi/m3
5F1 SLO OEL(518822001) - AC	29-Aug-20	Iodine-131	1.16E-03	1.32E-02	7.59E-03	pCi/m3
5F1 SLO OEL(520288001) - AC	5-Sep-20	Iodine-131	-7.67E-03	1.27E-02	9.31E-03	pCi/m3
5F1 SLO OEL(520368001) - AC	12-Sep-20	Iodine-131	-1.55E-04	7.30E-03	4.26E-03	pCi/m3
5F1 SLO OEL(521272001) - AC	19-Sep-20	Iodine-131	5.47E-03	1.57E-02	1.22E-02	pCi/m3
5F1 SLO OEL(521863001) - AC	26-Sep-20	Iodine-131	-6.24E-03	1.32E-02	9.16E-03	pCi/m3
5F1 SLO OEL(522576001) - AC	3-Oct-20	Iodine-131	6.52E-03	1.23E-02	1.18E-02	pCi/m3
5F1 SLO OEL(524007001) - AC	10-Oct-20	Iodine-131	1.64E-03	1.69E-02	9.40E-03	pCi/m3
5F1 SLO OEL(524009015) - AC	17-Oct-20	Iodine-131	-2.79E-03	8.81E-03	5.78E-03	pCi/m3
5F1 SLO OEL(524695001) - AC	24-Oct-20	Iodine-131	-6.17E-04	8.04E-03	4.77E-03	pCi/m3
5F1 SLO OEL(525830001) - AC	31-Oct-20	Iodine-131	4.13E-05	1.72E-02	9.80E-03	pCi/m3
5F1 SLO OEL(526380015) - AC	7-Nov-20	Iodine-131	4.46E-03	1.26E-02	6.96E-03	pCi/m3
5F1 SLO OEL(527613001) - AC	14-Nov-20	Iodine-131	6.54E-03	6.62E-03	4.29E-03	pCi/m3
5F1 SLO OEL(527712001) - AC	21-Nov-20	Iodine-131	2.73E-04	1.18E-02	6.93E-03	pCi/m3
5F1 SLO OEL(528790015) - AC	28-Nov-20	Iodine-131	-2.84E-03	7.71E-03	5.29E-03	pCi/m3
5F1 SLO OEL(528845001) - AC	5-Dec-20	Iodine-131	-3.48E-03	1.26E-02	8.41E-03	pCi/m3
5F1 SLO OEL(529341001) - AC	12-Dec-20	Iodine-131	-4.56E-03	7.29E-03	5.47E-03	pCi/m3
5F1 SLO OEL(530196001) - AC	19-Dec-20	Iodine-131	4.72E-04	9.61E-03	5.59E-03	pCi/m3
5F1 SLO OEL(530951001) - AC	25-Dec-20	Iodine-131	-6.31E-04	8.82E-03	5.35E-03	pCi/m3

5F1 SLO OEL - Air Carbon-14

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
5F1 SLO OEL(500231007) - AC14	4-Jan-20	Carbon-14	4.68E-08	1.00E-07	6.05E-08	uCi/m3
5F1 SLO OEL(500490017) - AC14	11-Jan-20	Carbon-14	9.02E-08	1.24E-07	7.57E-08	uCi/m3
5F1 SLO OEL(501031003) - AC14	18-Jan-20	Carbon-14	8.60E-08	1.21E-07	7.38E-08	uCi/m3
5F1 SLO OEL(502000003) - AC14	25-Jan-20	Carbon-14	1.08E-07	1.25E-07	7.64E-08	uCi/m3
5F1 SLO OEL(502411003) - AC14	1-Feb-20	Carbon-14	3.17E-08	1.13E-07	6.79E-08	uCi/m3
5F1 SLO OEL(503155005) - AC14	8-Feb-20	Carbon-14	-2.21E-08	1.22E-07	7.19E-08	uCi/m3
5F1 SLO OEL(503851003) - AC14	15-Feb-20	Carbon-14	9.24E-08	1.17E-07	7.14E-08	uCi/m3
5F1 SLO OEL(504528003) - AC14	22-Feb-20	Carbon-14	1.02E-07	1.21E-07	7.37E-08	uCi/m3

2020 DCPD REMP Analysis Results Appendix A

5F1 SLO OEL(505332017) - AC14	29-Feb-20	Carbon-14	1.16E-07	1.45E-07	8.83E-08	uCi/m3
5F1 SLO OEL(505759005) - AC14	7-Mar-20	Carbon-14	1.23E-07	1.35E-07	8.25E-08	uCi/m3
5F1 SLO OEL(506435003) - AC14	14-Mar-20	Carbon-14	2.53E-08	1.38E-07	8.28E-08	uCi/m3
5F1 SLO OEL(507015003) - AC14	21-Mar-20	Carbon-14	1.25E-07	1.42E-07	8.73E-08	uCi/m3
5F1 SLO OEL(507592017) - AC14	27-Mar-20	Carbon-14	5.54E-08	1.18E-07	7.13E-08	uCi/m3
5F1 SLO OEL(508867003) - AC14	4-Apr-20	Carbon-14	7.80E-08	1.15E-07	7.02E-08	uCi/m3
5F1 SLO OEL(508984005) - AC14	11-Apr-20	Carbon-14	1.91E-08	1.65E-07	9.87E-08	uCi/m3
5F1 SLO OEL(509370005) - AC14	18-Apr-20	Carbon-14	6.11E-08	1.06E-07	6.43E-08	uCi/m3
5F1 SLO OEL(509745003) - AC14	25-Apr-20	Carbon-14	-9.71E-08	1.45E-07	8.45E-08	uCi/m3
5F1 SLO OEL(510179003) - AC14	2-May-20	Carbon-14	7.45E-08	1.25E-07	7.60E-08	uCi/m3
5F1 SLO OEL(510640003) - AC14	9-May-20	Carbon-14	1.06E-07	1.25E-07	7.62E-08	uCi/m3
5F1 SLO OEL(510747003) - AC14	16-May-20	Carbon-14	8.94E-08	1.20E-07	7.31E-08	uCi/m3
5F1 SLO OEL(511437003) - AC14	23-May-20	Carbon-14	6.62E-08	1.59E-07	9.61E-08	uCi/m3
5F1 SLO OEL(512099003) - AC14	30-May-20	Carbon-14	8.45E-08	1.08E-07	6.60E-08	uCi/m3
5F1 SLO OEL(512380003) - AC14	6-Jun-20	Carbon-14	5.23E-08	1.42E-07	8.57E-08	uCi/m3
5F1 SLO OEL(513083005) - AC14	13-Jun-20	Carbon-14	5.45E-08	1.27E-07	7.67E-08	uCi/m3
5F1 SLO OEL(513584003) - AC14	20-Jun-20	Carbon-14	1.14E-07	1.24E-07	7.60E-08	uCi/m3
5F1 SLO OEL(514894009) - AC14	27-Jun-20	Carbon-14	9.09E-08	1.53E-07	9.27E-08	uCi/m3
5F1 SLO OEL(514398003) - AC14	4-Jul-20	Carbon-14	5.72E-08	1.18E-07	7.13E-08	uCi/m3
5F1 SLO OEL(514716011) - AC14	11-Jul-20	Carbon-14	9.95E-10	1.44E-07	8.56E-08	uCi/m3
5F1 SLO OEL(515649005) - AC14	18-Jul-20	Carbon-14	-4.03E-08	1.39E-07	8.18E-08	uCi/m3
5F1 SLO OEL(517082003) - AC14	25-Jul-20	Carbon-14	-4.69E-08	1.22E-07	7.19E-08	uCi/m3
5F1 SLO OEL(516773003) - AC14	1-Aug-20	Carbon-14	1.13E-07	1.37E-07	8.32E-08	uCi/m3
5F1 SLO OEL(517339019) - AC14	8-Aug-20	Carbon-14	1.53E-07	1.54E-07	9.41E-08	uCi/m3
5F1 SLO OEL(517997005) - AC14	15-Aug-20	Carbon-14	-6.38E-08	1.27E-07	7.48E-08	uCi/m3
5F1 SLO OEL(518816015) - AC14	22-Aug-20	Carbon-14	-8.65E-08	1.30E-07	7.61E-08	uCi/m3
5F1 SLO OEL(518822015) - AC14	29-Aug-20	Carbon-14	6.51E-08	1.35E-07	8.12E-08	uCi/m3
5F1 SLO OEL(520288003) - AC14	5-Sep-20	Carbon-14	9.50E-09	1.31E-07	7.84E-08	uCi/m3
5F1 SLO OEL(520368003) - AC14	12-Sep-20	Carbon-14	2.34E-09	1.31E-07	7.83E-08	uCi/m3
5F1 SLO OEL(521272003) - AC14	19-Sep-20	Carbon-14	8.19E-08	1.37E-07	8.30E-08	uCi/m3
5F1 SLO OEL(521863003) - AC14	26-Sep-20	Carbon-14	-6.71E-08	1.27E-07	7.44E-08	uCi/m3
5F1 SLO OEL(522576005) - AC14	3-Oct-20	Carbon-14	4.42E-08	1.26E-07	7.56E-08	uCi/m3
5F1 SLO OEL(524007005) - AC14	10-Oct-20	Carbon-14	1.74E-07	2.39E-07	1.44E-07	uCi/m3
5F1 SLO OEL(524009017) - AC14	17-Oct-20	Carbon-14	8.25E-08	2.12E-07	1.27E-07	uCi/m3
5F1 SLO OEL(524695003) - AC14	24-Oct-20	Carbon-14	-1.12E-09	1.30E-07	7.76E-08	uCi/m3
5F1 SLO OEL(525830003) - AC14	31-Oct-20	Carbon-14	3.00E-08	1.29E-07	7.75E-08	uCi/m3
5F1 SLO OEL(526380017) - AC14	7-Nov-20	Carbon-14	-4.94E-08	1.54E-07	9.07E-08	uCi/m3
5F1 SLO OEL(527613003) - AC14	14-Nov-20	Carbon-14	-9.04E-08	1.16E-07	6.75E-08	uCi/m3

2020 DCPD REMP Analysis Results Appendix A

5F1 SLO OEL(527712003) - AC14	21-Nov-20	Carbon-14	-3.78E-08	1.60E-07	9.44E-08	uCi/m3
5F1 SLO OEL(528790017) - AC14	28-Nov-20	Carbon-14	-9.06E-09	1.11E-07	6.61E-08	uCi/m3
5F1 SLO OEL(528845005) - AC14	5-Dec-20	Carbon-14	-6.50E-08	1.35E-07	7.96E-08	uCi/m3
5F1 SLO OEL(529341003) - AC14	12-Dec-20	Carbon-14	7.19E-09	1.31E-07	7.81E-08	uCi/m3
5F1 SLO OEL(530196005) - AC14	19-Dec-20	Carbon-14	1.28E-08	1.53E-07	9.14E-08	uCi/m3
5F1 SLO OEL(530951003) - AC14	25-Dec-20	Carbon-14	-4.52E-08	1.52E-07	8.98E-08	uCi/m3

5F1 SLO OEL - Air Particulate

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
5F1 SLO OEL(500231002) - AP	4-Jan-20	BETA	2.98E-02	1.83E-03	9.89E-03	pCi/m3
5F1 SLO OEL(500490016) - AP	11-Jan-20	BETA	7.70E-03	2.07E-03	1.12E-02	pCi/m3
5F1 SLO OEL(501031002) - AP	18-Jan-20	BETA	2.39E-02	2.71E-03	1.07E-02	pCi/m3
5F1 SLO OEL(502000002) - AP	25-Jan-20	BETA	1.93E-02	2.35E-03	1.43E-02	pCi/m3
5F1 SLO OEL(502411002) - AP	1-Feb-20	BETA	1.32E-02	2.03E-03	1.17E-02	pCi/m3
5F1 SLO OEL(503155002) - AP	8-Feb-20	BETA	2.29E-02	2.06E-03	1.02E-02	pCi/m3
5F1 SLO OEL(503851002) - AP	15-Feb-20	BETA	2.76E-02	2.25E-03	1.13E-02	pCi/m3
5F1 SLO OEL(504528002) - AP	22-Feb-20	BETA	3.76E-02	2.31E-03	1.13E-02	pCi/m3
5F1 SLO OEL(505332016) - AP	29-Feb-20	BETA	2.49E-02	2.14E-03	1.44E-02	pCi/m3
5F1 SLO OEL(505759002) - AP	7-Mar-20	BETA	1.56E-02	2.04E-03	1.18E-02	pCi/m3
5F1 SLO OEL(506435002) - AP	14-Mar-20	BETA	1.55E-02	2.28E-03	9.61E-03	pCi/m3
5F1 SLO OEL(507015002) - AP	21-Mar-20	BETA	1.54E-02	3.13E-03	1.15E-02	pCi/m3
5F1 SLO OEL(507592016) - AP	27-Mar-20	BETA	1.90E-02	2.14E-03	1.04E-02	pCi/m3
5F1 SLO OEL(508867002) - AP	4-Apr-20	BETA	1.16E-02	1.98E-03	8.84E-03	pCi/m3
5F1 SLO OEL(508984002) - AP	11-Apr-20	BETA	9.29E-03	2.93E-03	1.55E-02	pCi/m3
5F1 SLO OEL(509370002) - AP	18-Apr-20	BETA	1.51E-02	1.98E-03	1.03E-02	pCi/m3
5F1 SLO OEL(509745002) - AP	25-Apr-20	BETA	1.62E-02	2.49E-03	1.33E-02	pCi/m3
5F1 SLO OEL(510179002) - AP	2-May-20	BETA	8.81E-03	2.62E-03	1.22E-02	pCi/m3
5F1 SLO OEL(510640002) - AP	9-May-20	BETA	2.73E-02	2.39E-03	1.18E-02	pCi/m3
5F1 SLO OEL(510747002) - AP	16-May-20	BETA	1.06E-02	2.13E-03	1.06E-02	pCi/m3
5F1 SLO OEL(511437002) - AP	23-May-20	BETA	1.29E-02	2.51E-03	1.15E-02	pCi/m3
5F1 SLO OEL(512099002) - AP	30-May-20	BETA	9.06E-03	1.98E-03	1.03E-02	pCi/m3
5F1 SLO OEL(512380002) - AP	6-Jun-20	BETA	1.02E-02	2.14E-03	1.11E-02	pCi/m3
5F1 SLO OEL(513083002) - AP	13-Jun-20	BETA	1.11E-02	2.18E-03	1.07E-02	pCi/m3
5F1 SLO OEL(513584002) - AP	20-Jun-20	BETA	7.43E-03	2.47E-03	1.14E-02	pCi/m3
5F1 SLO OEL(514894003) - AP	27-Jun-20	BETA	4.58E-03	2.98E-03	1.27E-02	pCi/m3
5F1 SLO OEL(514398002) - AP	4-Jul-20	BETA	1.21E-02	2.04E-03	8.48E-03	pCi/m3
5F1 SLO OEL(514716002) - AP	11-Jul-20	BETA	1.26E-02	2.15E-03	9.95E-03	pCi/m3
5F1 SLO OEL(515649002) - AP	18-Jul-20	BETA	7.77E-03	2.55E-03	1.25E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

5F1 SLO OEL(517082002) - AP	25-Jul-20	BETA	9.58E-03	2.18E-03	9.27E-03	pCi/m3
5F1 SLO OEL(516773002) - AP	1-Aug-20	BETA	6.28E-03	2.62E-03	1.03E-02	pCi/m3
5F1 SLO OEL(517339002) - AP	8-Aug-20	BETA	1.03E-02	2.77E-03	1.14E-02	pCi/m3
5F1 SLO OEL(517997002) - AP	15-Aug-20	BETA	1.99E-02	2.25E-03	1.19E-02	pCi/m3
5F1 SLO OEL(518816002) - AP	22-Aug-20	BETA	1.76E-02	2.83E-03	1.24E-02	pCi/m3
5F1 SLO OEL(518822002) - AP	29-Aug-20	BETA	1.41E-02	2.46E-03	1.08E-02	pCi/m3
5F1 SLO OEL(520288002) - AP	5-Sep-20	BETA	3.31E-02	2.51E-03	1.07E-02	pCi/m3
5F1 SLO OEL(520368002) - AP	12-Sep-20	BETA	3.08E-02	2.46E-03	1.29E-02	pCi/m3
5F1 SLO OEL(521272002) - AP	19-Sep-20	BETA	1.15E-02	2.95E-03	1.57E-02	pCi/m3
5F1 SLO OEL(521863002) - AP	26-Sep-20	BETA	1.23E-02	3.07E-03	1.65E-02	pCi/m3
5F1 SLO OEL(522576002) - AP	3-Oct-20	BETA	3.88E-02	3.19E-03	1.77E-02	pCi/m3
5F1 SLO OEL(524007002) - AP	10-Oct-20	BETA	2.39E-02	2.26E-03	1.10E-02	pCi/m3
5F1 SLO OEL(524009016) - AP	17-Oct-20	BETA	3.56E-02	2.23E-03	1.05E-02	pCi/m3
5F1 SLO OEL(524695002) - AP	24-Oct-20	BETA	3.43E-02	2.44E-03	1.20E-02	pCi/m3
5F1 SLO OEL(525830002) - AP	31-Oct-20	BETA	8.04E-02	1.93E-03	1.28E-02	pCi/m3
5F1 SLO OEL(526380016) - AP	7-Nov-20	BETA	3.33E-02	2.43E-03	1.18E-02	pCi/m3
5F1 SLO OEL(527613002) - AP	14-Nov-20	BETA	3.45E-02	2.11E-03	1.06E-02	pCi/m3
5F1 SLO OEL(527712002) - AP	21-Nov-20	BETA	2.59E-02	2.46E-03	1.28E-02	pCi/m3
5F1 SLO OEL(528790016) - AP	28-Nov-20	BETA	6.92E-02	2.04E-03	1.05E-02	pCi/m3
5F1 SLO OEL(528845002) - AP	5-Dec-20	BETA	7.20E-02	2.30E-03	1.20E-02	pCi/m3
5F1 SLO OEL(529341002) - AP	12-Dec-20	BETA	2.41E-02	2.33E-03	1.15E-02	pCi/m3
5F1 SLO OEL(530196002) - AP	19-Dec-20	BETA	3.73E-02	2.54E-03	1.41E-02	pCi/m3
5F1 SLO OEL(530951002) - AP	25-Dec-20	BETA	3.46E-02	2.04E-03	1.05E-02	pCi/m3
5F1 SLO OEL(509974007) - AP	14-Feb-20	Cesium-134	2.28E-04	4.76E-04	2.54E-04	pCi/m3
5F1 SLO OEL(516372003) - AP	15-May-20	Cesium-134	5.68E-05	5.64E-04	3.11E-04	pCi/m3
5F1 SLO OEL(525316001) - AP	15-Aug-20	Cesium-134	1.51E-04	4.72E-04	2.74E-04	pCi/m3
5F1 SLO OEL(532027001) - AP	14-Nov-20	Cesium-134	5.15E-05	6.14E-04	3.65E-04	pCi/m3
5F1 SLO OEL(509974007) - AP	14-Feb-20	Cesium-137	7.69E-05	4.24E-04	2.42E-04	pCi/m3
5F1 SLO OEL(516372003) - AP	15-May-20	Cesium-137	2.27E-05	5.73E-04	3.44E-04	pCi/m3
5F1 SLO OEL(525316001) - AP	15-Aug-20	Cesium-137	-2.47E-05	2.77E-04	1.74E-04	pCi/m3
5F1 SLO OEL(532027001) - AP	14-Nov-20	Cesium-137	5.50E-05	4.81E-04	2.78E-04	pCi/m3

5F2 Cal Poly Farm - Milk

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
5F2 Cal Poly Farm(500370001) - MK	13-Jan-20	Barium-140	-4.65E+00	7.12E+00	4.96E+00	pCi/L
5F2 Cal Poly Farm(502925001) - MK	4-Feb-20	Barium-140	-1.59E+00	6.88E+00	4.32E+00	pCi/L
5F2 Cal Poly Farm(505216001) - MK	2-Mar-20	Barium-140	-2.89E+00	9.99E+00	6.41E+00	pCi/L
5F2 Cal Poly Farm(508084001) - MK	6-Apr-20	Barium-140	-4.18E+00	6.39E+00	4.49E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

5F2 Cal Poly Farm(510659004) - MK	4-May-20	Barium-140	8.42E-01	9.80E+00	6.01E+00	pCi/L
5F2 Cal Poly Farm(512048001) - MK	1-Jun-20	Barium-140	-1.79E+00	1.21E+01	7.30E+00	pCi/L
5F2 Cal Poly Farm(514203001) - MK	6-Jul-20	Barium-140	2.02E-01	8.02E+00	4.76E+00	pCi/L
5F2 Cal Poly Farm(517958001) - MK	11-Aug-20	Barium-140	1.68E+00	9.07E+00	7.63E+00	pCi/L
5F2 Cal Poly Farm(518806001) - MK	13-Aug-20	Barium-140	-5.17E-01	9.03E+00	5.31E+00	pCi/L
5F2 Cal Poly Farm(520364001) - MK	8-Sep-20	Barium-140	-1.37E-01	7.87E+00	4.71E+00	pCi/L
5F2 Cal Poly Farm(521275001) - MK	10-Sep-20	Barium-140	2.56E+00	8.33E+00	4.88E+00	pCi/L
5F2 Cal Poly Farm(516774001) - MK	13-Oct-20	Barium-140	-1.58E-01	8.52E+00	5.27E+00	pCi/L
5F2 Cal Poly Farm(523224001) - MK	2-Nov-20	Barium-140	-5.15E+00	1.19E+01	7.69E+00	pCi/L
5F2 Cal Poly Farm(528798001) - MK	1-Dec-20	Barium-140	3.61E+00	9.21E+00	5.40E+00	pCi/L
5F2 Cal Poly Farm(500370001) - MK	13-Jan-20	Cesium-134	2.61E-01	1.77E+00	1.06E+00	pCi/L
5F2 Cal Poly Farm(502925001) - MK	4-Feb-20	Cesium-134	2.57E-01	2.04E+00	1.24E+00	pCi/L
5F2 Cal Poly Farm(505216001) - MK	2-Mar-20	Cesium-134	2.32E-01	2.14E+00	1.23E+00	pCi/L
5F2 Cal Poly Farm(508084001) - MK	6-Apr-20	Cesium-134	1.13E+00	2.05E+00	1.61E+00	pCi/L
5F2 Cal Poly Farm(510659004) - MK	4-May-20	Cesium-134	1.77E-01	2.05E+00	1.18E+00	pCi/L
5F2 Cal Poly Farm(512048001) - MK	1-Jun-20	Cesium-134	8.49E-01	2.26E+00	1.37E+00	pCi/L
5F2 Cal Poly Farm(514203001) - MK	6-Jul-20	Cesium-134	-1.68E-01	1.88E+00	1.16E+00	pCi/L
5F2 Cal Poly Farm(517958001) - MK	11-Aug-20	Cesium-134	-5.13E-01	2.11E+00	1.68E+00	pCi/L
5F2 Cal Poly Farm(518806001) - MK	13-Aug-20	Cesium-134	4.36E-01	2.39E+00	1.47E+00	pCi/L
5F2 Cal Poly Farm(520364001) - MK	8-Sep-20	Cesium-134	2.71E-01	1.87E+00	1.13E+00	pCi/L
5F2 Cal Poly Farm(521275001) - MK	10-Sep-20	Cesium-134	3.09E-01	2.14E+00	1.28E+00	pCi/L
5F2 Cal Poly Farm(516774001) - MK	13-Oct-20	Cesium-134	1.05E+00	1.87E+00	1.61E+00	pCi/L
5F2 Cal Poly Farm(523224001) - MK	2-Nov-20	Cesium-134	-4.98E-01	3.00E+00	2.44E+00	pCi/L
5F2 Cal Poly Farm(528798001) - MK	1-Dec-20	Cesium-134	-8.02E-01	1.75E+00	1.16E+00	pCi/L
5F2 Cal Poly Farm(500370001) - MK	13-Jan-20	Cesium-137	9.97E-01	1.70E+00	1.04E+00	pCi/L
5F2 Cal Poly Farm(502925001) - MK	4-Feb-20	Cesium-137	5.36E-01	1.76E+00	1.07E+00	pCi/L
5F2 Cal Poly Farm(505216001) - MK	2-Mar-20	Cesium-137	-4.68E-01	1.89E+00	1.22E+00	pCi/L
5F2 Cal Poly Farm(508084001) - MK	6-Apr-20	Cesium-137	5.52E-01	1.66E+00	2.16E+00	pCi/L
5F2 Cal Poly Farm(510659004) - MK	4-May-20	Cesium-137	1.41E-01	1.89E+00	1.09E+00	pCi/L
5F2 Cal Poly Farm(512048001) - MK	1-Jun-20	Cesium-137	3.01E-01	1.99E+00	1.18E+00	pCi/L
5F2 Cal Poly Farm(514203001) - MK	6-Jul-20	Cesium-137	1.00E+00	1.77E+00	1.10E+00	pCi/L
5F2 Cal Poly Farm(517958001) - MK	11-Aug-20	Cesium-137	7.56E-01	1.91E+00	1.17E+00	pCi/L
5F2 Cal Poly Farm(518806001) - MK	13-Aug-20	Cesium-137	-2.90E-01	2.12E+00	1.29E+00	pCi/L
5F2 Cal Poly Farm(520364001) - MK	8-Sep-20	Cesium-137	-7.00E-02	1.71E+00	1.04E+00	pCi/L
5F2 Cal Poly Farm(521275001) - MK	10-Sep-20	Cesium-137	-2.69E-01	1.96E+00	1.19E+00	pCi/L
5F2 Cal Poly Farm(516774001) - MK	13-Oct-20	Cesium-137	-6.04E-01	1.63E+00	1.02E+00	pCi/L
5F2 Cal Poly Farm(523224001) - MK	2-Nov-20	Cesium-137	1.26E+00	2.76E+00	1.65E+00	pCi/L
5F2 Cal Poly Farm(528798001) - MK	1-Dec-20	Cesium-137	1.29E-01	1.73E+00	1.02E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

5F2 Cal Poly Farm(500370001) - MK	13-Jan-20	Iodine-131	3.16E-01	9.91E-01	5.75E-01	pCi/L
5F2 Cal Poly Farm(502925001) - MK	4-Feb-20	Iodine-131	1.54E-01	9.77E-01	5.65E-01	pCi/L
5F2 Cal Poly Farm(505216001) - MK	2-Mar-20	Iodine-131	2.98E-01	6.86E-01	4.11E-01	pCi/L
5F2 Cal Poly Farm(508084001) - MK	6-Apr-20	Iodine-131	-3.62E-01	7.92E-01	5.05E-01	pCi/L
5F2 Cal Poly Farm(510659004) - MK	4-May-20	Iodine-131	1.34E-01	5.86E-01	3.35E-01	pCi/L
5F2 Cal Poly Farm(512048001) - MK	1-Jun-20	Iodine-131	2.56E-01	7.78E-01	4.69E-01	pCi/L
5F2 Cal Poly Farm(514203001) - MK	6-Jul-20	Iodine-131	-8.92E-02	7.40E-01	4.32E-01	pCi/L
5F2 Cal Poly Farm(517958001) - MK	11-Aug-20	Iodine-131	-2.57E-02	6.07E-01	3.61E-01	pCi/L
5F2 Cal Poly Farm(518806001) - MK	13-Aug-20	Iodine-131	-2.94E-02	4.62E-01	2.68E-01	pCi/L
5F2 Cal Poly Farm(520364001) - MK	8-Sep-20	Iodine-131	1.32E-01	4.83E-01	2.91E-01	pCi/L
5F2 Cal Poly Farm(521275001) - MK	10-Sep-20	Iodine-131	-5.18E-01	7.75E-01	7.09E-01	pCi/L
5F2 Cal Poly Farm(516774001) - MK	13-Oct-20	Iodine-131	-1.66E-01	9.99E-01	6.04E-01	pCi/L
5F2 Cal Poly Farm(523224001) - MK	2-Nov-20	Iodine-131	6.97E-02	8.02E-01	4.62E-01	pCi/L
5F2 Cal Poly Farm(528798001) - MK	1-Dec-20	Iodine-131	1.53E-01	9.68E-01	5.72E-01	pCi/L
5F2 Cal Poly Farm(500370001) - MK	13-Jan-20	Lanthanum-140	1.85E-01	2.41E+00	1.41E+00	pCi/L
5F2 Cal Poly Farm(502925001) - MK	4-Feb-20	Lanthanum-140	-2.92E-01	1.87E+00	1.17E+00	pCi/L
5F2 Cal Poly Farm(505216001) - MK	2-Mar-20	Lanthanum-140	-1.60E+00	3.02E+00	2.12E+00	pCi/L
5F2 Cal Poly Farm(508084001) - MK	6-Apr-20	Lanthanum-140	5.12E-01	2.33E+00	1.38E+00	pCi/L
5F2 Cal Poly Farm(510659004) - MK	4-May-20	Lanthanum-140	-4.30E-01	2.98E+00	1.85E+00	pCi/L
5F2 Cal Poly Farm(512048001) - MK	1-Jun-20	Lanthanum-140	-3.19E-01	3.78E+00	2.29E+00	pCi/L
5F2 Cal Poly Farm(514203001) - MK	6-Jul-20	Lanthanum-140	5.12E-01	2.64E+00	1.53E+00	pCi/L
5F2 Cal Poly Farm(517958001) - MK	11-Aug-20	Lanthanum-140	-1.50E-01	2.80E+00	1.97E+00	pCi/L
5F2 Cal Poly Farm(518806001) - MK	13-Aug-20	Lanthanum-140	9.12E-01	3.41E+00	2.02E+00	pCi/L
5F2 Cal Poly Farm(520364001) - MK	8-Sep-20	Lanthanum-140	-5.55E-01	2.56E+00	1.62E+00	pCi/L
5F2 Cal Poly Farm(521275001) - MK	10-Sep-20	Lanthanum-140	-3.00E+00	2.01E+00	2.35E+00	pCi/L
5F2 Cal Poly Farm(516774001) - MK	13-Oct-20	Lanthanum-140	-6.24E-01	2.59E+00	2.95E+00	pCi/L
5F2 Cal Poly Farm(523224001) - MK	2-Nov-20	Lanthanum-140	1.54E-01	3.80E+00	2.24E+00	pCi/L
5F2 Cal Poly Farm(528798001) - MK	1-Dec-20	Lanthanum-140	1.40E-01	2.75E+00	1.60E+00	pCi/L
5F2 Cal Poly Farm(500370001) - MK	13-Jan-20	Total Strontium	8.79E-01	1.05E+00	7.28E-01	pCi/L
5F2 Cal Poly Farm(502925001) - MK	4-Feb-20	Total Strontium	8.09E-01	1.22E+00	8.64E-01	pCi/L
5F2 Cal Poly Farm(505216001) - MK	2-Mar-20	Total Strontium	4.92E-01	8.85E-01	5.88E-01	pCi/L
5F2 Cal Poly Farm(508084001) - MK	6-Apr-20	Total Strontium	6.32E-01	1.18E+00	7.74E-01	pCi/L
5F2 Cal Poly Farm(510659004) - MK	4-May-20	Total Strontium	1.56E+00	1.57E+00	1.17E+00	pCi/L
5F2 Cal Poly Farm(512048001) - MK	1-Jun-20	Total Strontium	-7.30E-04	6.63E-01	3.95E-01	pCi/L
5F2 Cal Poly Farm(514203001) - MK	6-Jul-20	Total Strontium	-2.92E-01	1.08E+00	6.18E-01	pCi/L
5F2 Cal Poly Farm(517958001) - MK	11-Aug-20	Total Strontium	-2.43E-01	1.75E+00	1.01E+00	pCi/L
5F2 Cal Poly Farm(518806001) - MK	13-Aug-20	Total Strontium	2.99E-01	1.61E+00	9.97E-01	pCi/L
5F2 Cal Poly Farm(520364001) - MK	8-Sep-20	Total Strontium	2.75E-01	7.78E-01	5.02E-01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

5F2 Cal Poly Farm(521275001) - MK	10-Sep-20	Total Strontium	1.50E-01	6.62E-01	4.10E-01	pCi/L
5F2 Cal Poly Farm(516774001) - MK	13-Oct-20	Total Strontium	1.74E-01	1.06E+00	6.43E-01	pCi/L
5F2 Cal Poly Farm(523224001) - MK	2-Nov-20	Total Strontium	5.09E-01	1.16E+00	7.75E-01	pCi/L
5F2 Cal Poly Farm(528798001) - MK	1-Dec-20	Total Strontium	4.01E-01	1.24E+00	8.03E-01	pCi/L

5F2 Cal Poly Farm - Vegetation

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
5F2 Cal Poly Farm(500489001) - VG Brdleaf	13-Jan-20	Cesium-134	1.60E+00	1.44E+01	8.27E+00	pCi/kg
5F2 Cal Poly Farm(502413001) - VG Brdleaf	4-Feb-20	Cesium-134	-6.23E-01	1.09E+01	6.82E+00	pCi/kg
5F2 Cal Poly Farm(505216002) - VG Brdleaf	2-Mar-20	Cesium-134	1.44E+00	8.11E+00	4.61E+00	pCi/kg
5F2 Cal Poly Farm(508084002) - VG Brdleaf	6-Apr-20	Cesium-134	6.16E-01	1.50E+01	8.96E+00	pCi/kg
5F2 Cal Poly Farm(510659001) - VG Brdleaf	4-May-20	Cesium-134	-4.78E+00	1.05E+01	7.24E+00	pCi/kg
5F2 Cal Poly Farm(512048002) - VG Brdleaf	1-Jun-20	Cesium-134	1.87E+00	1.28E+01	7.64E+00	pCi/kg
5F2 Cal Poly Farm(514203002) - VG Brdleaf	6-Jul-20	Cesium-134	-4.33E+00	8.75E+00	6.08E+00	pCi/kg
5F2 Cal Poly Farm(517958003) - VG Brdleaf	11-Aug-20	Cesium-134	5.04E+00	1.64E+01	9.37E+00	pCi/kg
5F2 Cal Poly Farm(520363001) - VG Brdleaf	8-Sep-20	Cesium-134	-4.68E-01	7.23E+00	5.03E+00	pCi/kg
5F2 Cal Poly Farm(523232001) - VG Brdleaf	5-Oct-20	Cesium-134	-1.92E+00	6.16E+00	4.04E+00	pCi/kg
5F2 Cal Poly Farm(525832001) - VG Brdleaf	2-Nov-20	Cesium-134	-3.36E+00	6.76E+00	4.75E+00	pCi/kg
5F2 Cal Poly Farm(528798002) - VG Brdleaf	1-Dec-20	Cesium-134	-1.83E+00	7.52E+00	4.90E+00	pCi/kg
5F2 Cal Poly Farm(500489001) - VG Brdleaf	13-Jan-20	Cesium-137	1.54E+00	1.28E+01	7.82E+00	pCi/kg
5F2 Cal Poly Farm(502413001) - VG Brdleaf	4-Feb-20	Cesium-137	-2.77E+00	1.10E+01	7.03E+00	pCi/kg
5F2 Cal Poly Farm(505216002) - VG Brdleaf	2-Mar-20	Cesium-137	-2.06E+00	7.25E+00	4.71E+00	pCi/kg
5F2 Cal Poly Farm(508084002) - VG Brdleaf	6-Apr-20	Cesium-137	-4.97E-02	1.39E+01	8.28E+00	pCi/kg
5F2 Cal Poly Farm(510659001) - VG Brdleaf	4-May-20	Cesium-137	5.93E+00	1.25E+01	7.56E+00	pCi/kg
5F2 Cal Poly Farm(512048002) - VG Brdleaf	1-Jun-20	Cesium-137	3.30E+00	1.17E+01	6.88E+00	pCi/kg
5F2 Cal Poly Farm(514203002) - VG Brdleaf	6-Jul-20	Cesium-137	-1.91E+00	8.14E+00	5.13E+00	pCi/kg
5F2 Cal Poly Farm(517958003) - VG Brdleaf	11-Aug-20	Cesium-137	3.91E+00	1.56E+01	9.39E+00	pCi/kg
5F2 Cal Poly Farm(520363001) - VG Brdleaf	8-Sep-20	Cesium-137	-7.86E-01	6.46E+00	3.98E+00	pCi/kg
5F2 Cal Poly Farm(523232001) - VG Brdleaf	5-Oct-20	Cesium-137	-1.90E+00	6.26E+00	4.04E+00	pCi/kg
5F2 Cal Poly Farm(525832001) - VG Brdleaf	2-Nov-20	Cesium-137	-3.00E+00	6.86E+00	5.93E+00	pCi/kg
5F2 Cal Poly Farm(528798002) - VG Brdleaf	1-Dec-20	Cesium-137	2.51E-01	7.24E+00	4.40E+00	pCi/kg
5F2 Cal Poly Farm(500489001) - VG Brdleaf	13-Jan-20	Iodine-131	5.45E-01	1.54E+01	9.16E+00	pCi/kg
5F2 Cal Poly Farm(502413001) - VG Brdleaf	4-Feb-20	Iodine-131	-1.92E+00	1.68E+01	9.88E+00	pCi/kg
5F2 Cal Poly Farm(505216002) - VG Brdleaf	2-Mar-20	Iodine-131	5.36E+00	9.92E+00	6.06E+00	pCi/kg
5F2 Cal Poly Farm(508084002) - VG Brdleaf	6-Apr-20	Iodine-131	5.37E+00	1.57E+01	9.75E+00	pCi/kg
5F2 Cal Poly Farm(510659001) - VG Brdleaf	4-May-20	Iodine-131	-6.35E+00	1.20E+01	7.88E+00	pCi/kg
5F2 Cal Poly Farm(512048002) - VG Brdleaf	1-Jun-20	Iodine-131	-9.67E-01	1.33E+01	7.94E+00	pCi/kg
5F2 Cal Poly Farm(514203002) - VG Brdleaf	6-Jul-20	Iodine-131	-1.49E+00	1.17E+01	6.87E+00	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

5F2 Cal Poly Farm(517958003) - VG Brdleaf	11-Aug-20	Iodine-131	9.42E+00	2.49E+01	1.48E+01	pCi/kg
5F2 Cal Poly Farm(520363001) - VG Brdleaf	8-Sep-20	Iodine-131	1.04E+01	1.04E+01	1.59E+01	pCi/kg
5F2 Cal Poly Farm(523232001) - VG Brdleaf	5-Oct-20	Iodine-131	4.34E+00	8.01E+00	5.28E+00	pCi/kg
5F2 Cal Poly Farm(525832001) - VG Brdleaf	2-Nov-20	Iodine-131	-5.24E+00	1.04E+01	6.75E+00	pCi/kg
5F2 Cal Poly Farm(528798002) - VG Brdleaf	1-Dec-20	Iodine-131	8.80E-02	8.07E+00	4.76E+00	pCi/kg

5S2 Diablo Creek Weir - Drinking Water

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	BETA	1.97E+00	1.61E+00	1.11E+00	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	BETA	2.82E+00	2.83E+00	1.83E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	BETA	4.99E+00	2.42E+00	1.81E+00	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	BETA	3.27E+00	2.42E+00	1.65E+00	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	BETA	4.20E+00	2.20E+00	1.62E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	BETA	3.17E+00	2.65E+00	1.76E+00	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	BETA	1.81E+00	2.90E+00	1.82E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	BETA	1.53E+00	3.21E+00	1.97E+00	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	BETA	1.45E+00	2.43E+00	1.52E+00	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	BETA	5.70E-01	2.35E+00	1.44E+00	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	BETA	2.29E+00	1.91E+00	1.29E+00	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	BETA	1.78E+00	1.90E+00	1.24E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Barium-140	-4.05E+00	6.62E+00	4.60E+00	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Barium-140	1.14E+00	6.53E+00	3.85E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Barium-140	-2.43E+00	6.70E+00	4.25E+00	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Barium-140	-5.43E+00	5.59E+00	5.97E+00	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Barium-140	-1.93E-01	7.15E+00	4.31E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Barium-140	-3.94E+00	6.85E+00	4.76E+00	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Barium-140	3.32E-01	7.79E+00	4.63E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Barium-140	-3.01E+00	6.92E+00	4.58E+00	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Barium-140	1.57E+00	7.09E+00	4.16E+00	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Barium-140	-1.82E+00	8.10E+00	5.04E+00	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Barium-140	1.43E+00	6.12E+00	3.54E+00	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Barium-140	-1.39E+00	8.73E+00	5.17E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Cesium-134	-3.63E-01	1.65E+00	1.05E+00	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Cesium-134	-2.14E-01	1.72E+00	1.08E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Cesium-134	6.00E-02	1.46E+00	8.75E-01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Cesium-134	-5.44E-01	1.48E+00	9.30E-01	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Cesium-134	-6.25E-01	1.49E+00	9.47E-01	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Cesium-134	4.26E-01	1.71E+00	1.02E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Cesium-134	6.14E-02	1.87E+00	1.15E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Cesium-134	4.15E-01	1.56E+00	8.89E-01	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Cesium-134	6.02E-01	1.41E+00	8.52E-01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Cesium-134	1.20E+00	1.75E+00	1.12E+00	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Cesium-134	-1.86E-02	1.33E+00	8.03E-01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Cesium-134	4.77E-01	1.75E+00	1.03E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Cesium-137	4.35E-01	1.56E+00	9.28E-01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Cesium-137	-9.43E-01	1.77E+00	1.64E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Cesium-137	4.95E-01	1.54E+00	9.07E-01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Cesium-137	3.64E-01	1.58E+00	9.51E-01	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Cesium-137	-3.52E-01	1.54E+00	1.44E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Cesium-137	6.48E-01	1.54E+00	9.25E-01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Cesium-137	-1.73E-01	1.73E+00	1.07E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Cesium-137	-1.54E+00	1.60E+00	1.54E+00	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Cesium-137	2.73E-01	1.35E+00	8.01E-01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Cesium-137	3.60E-01	1.52E+00	9.12E-01	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Cesium-137	-6.71E-01	1.14E+00	7.96E-01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Cesium-137	6.76E-01	1.83E+00	1.08E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Cobalt-58	2.38E-01	1.59E+00	9.61E-01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Cobalt-58	-1.22E+00	1.47E+00	1.41E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Cobalt-58	-6.95E-01	1.38E+00	1.37E+00	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Cobalt-58	-2.08E-01	1.27E+00	7.54E-01	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Cobalt-58	-2.17E-01	1.31E+00	8.83E-01	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Cobalt-58	-9.07E-02	1.33E+00	8.20E-01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Cobalt-58	6.25E-01	1.71E+00	1.08E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Cobalt-58	2.66E-01	1.45E+00	8.25E-01	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Cobalt-58	-1.15E-01	1.26E+00	7.80E-01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Cobalt-58	-6.50E-01	1.36E+00	9.54E-01	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Cobalt-58	6.36E-01	1.04E+00	1.46E+00	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Cobalt-58	-1.61E-02	1.59E+00	9.46E-01	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Cobalt-60	-1.60E-01	1.51E+00	9.17E-01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Cobalt-60	-3.48E-02	1.73E+00	1.04E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Cobalt-60	-3.77E-01	1.47E+00	9.15E-01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Cobalt-60	1.25E+00	1.61E+00	1.31E+00	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Cobalt-60	-8.04E-01	1.47E+00	1.83E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Cobalt-60	-2.33E-01	1.49E+00	9.07E-01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Cobalt-60	-2.95E-01	1.58E+00	9.95E-01	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Cobalt-60	3.59E-01	1.62E+00	9.52E-01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Cobalt-60	-3.58E-02	1.47E+00	8.69E-01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Cobalt-60	4.57E-01	1.61E+00	9.39E-01	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Cobalt-60	1.86E-01	1.22E+00	6.99E-01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Cobalt-60	7.88E-02	1.61E+00	1.07E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Iodine-131	-1.76E-01	9.45E-01	5.57E-01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Iodine-131	2.29E-01	9.37E-01	5.42E-01	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Iodine-131	-1.60E-01	4.83E-01	2.98E-01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Iodine-131	2.55E-01	8.34E-01	4.89E-01	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Iodine-131	3.05E-01	6.40E-01	3.88E-01	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Iodine-131	1.39E-01	5.23E-01	3.12E-01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Iodine-131	2.05E-01	6.31E-01	3.65E-01	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Iodine-131	-1.12E-02	5.80E-01	3.36E-01	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Iodine-131	-3.10E-01	7.99E-01	5.01E-01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Iodine-131	-1.35E-01	5.23E-01	3.28E-01	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Iodine-131	3.61E-01	7.34E-01	4.37E-01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Iodine-131	9.14E-02	8.06E-01	4.73E-01	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Iron-55	1.79E+01	6.25E+01	4.70E+01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Iron-55	-2.24E+01	9.26E+01	6.74E+01	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Iron-55	7.23E+00	1.02E+02	7.45E+01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Iron-55	-1.29E+01	7.64E+01	5.41E+01	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Iron-55	4.72E+00	6.98E+01	4.70E+01	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Iron-55	-9.07E+01	1.27E+02	7.73E+01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Iron-55	-5.65E+00	4.86E+01	3.07E+01	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Iron-55	-7.21E+01	1.03E+02	7.32E+01	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Iron-55	4.89E+01	8.27E+01	6.62E+01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Iron-55	1.17E+01	1.17E+02	7.86E+01	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Iron-55	1.18E+01	1.18E+02	7.49E+01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Iron-55	1.61E+01	1.35E+02	8.55E+01	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Iron-59	1.01E-01	2.86E+00	1.89E+00	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Iron-59	-7.99E-01	2.71E+00	1.98E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Iron-59	-6.54E-01	2.89E+00	2.13E+00	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Iron-59	4.05E-01	2.75E+00	1.60E+00	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Iron-59	-1.10E-01	2.86E+00	1.70E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Iron-59	2.17E-01	3.16E+00	1.81E+00	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Iron-59	-1.55E+00	3.41E+00	2.27E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Iron-59	9.99E-01	3.11E+00	1.81E+00	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Iron-59	-6.33E-01	2.64E+00	1.62E+00	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Iron-59	-5.70E-01	3.05E+00	1.87E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Iron-59	6.09E-01	2.64E+00	1.59E+00	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Iron-59	1.59E+00	3.91E+00	2.36E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Lanthanum-140	4.88E-01	2.41E+00	1.59E+00	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Lanthanum-140	6.41E-01	2.57E+00	1.52E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Lanthanum-140	-1.07E+00	2.04E+00	1.44E+00	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Lanthanum-140	-3.17E-02	2.01E+00	1.23E+00	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Lanthanum-140	2.76E-01	2.66E+00	1.60E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Lanthanum-140	-2.18E+00	2.48E+00	2.02E+00	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Lanthanum-140	-5.79E-01	2.85E+00	1.84E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Lanthanum-140	-8.89E-01	2.37E+00	1.61E+00	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Lanthanum-140	-2.18E-01	2.22E+00	1.36E+00	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Lanthanum-140	-9.13E-01	2.71E+00	1.82E+00	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Lanthanum-140	-7.72E-01	2.05E+00	1.35E+00	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Lanthanum-140	5.08E-01	3.31E+00	1.93E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Manganese-54	7.29E-01	1.60E+00	9.82E-01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Manganese-54	-1.70E-01	1.47E+00	8.64E-01	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Manganese-54	-4.89E-01	1.36E+00	8.95E-01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Manganese-54	1.20E+00	1.20E+00	1.43E+00	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Manganese-54	5.16E-01	1.42E+00	8.19E-01	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Manganese-54	-3.05E-01	1.31E+00	8.44E-01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Manganese-54	-4.21E-01	1.53E+00	9.32E-01	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Manganese-54	-7.61E-01	1.21E+00	8.35E-01	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Manganese-54	-3.73E-01	1.18E+00	7.74E-01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Manganese-54	-8.07E-01	1.36E+00	1.04E+00	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Manganese-54	-2.47E-01	1.20E+00	7.56E-01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Manganese-54	1.07E-01	1.63E+00	9.62E-01	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Nickel-63	1.78E+01	3.15E+01	1.98E+01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Nickel-63	3.47E+01	3.54E+01	2.33E+01	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Nickel-63	1.59E+01	2.05E+01	1.29E+01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Nickel-63	-1.45E+01	3.32E+01	1.92E+01	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Nickel-63	-6.86E+00	3.18E+01	1.86E+01	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Nickel-63	1.79E+01	3.08E+01	1.93E+01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Nickel-63	-8.29E+00	3.75E+01	2.20E+01	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Nickel-63	2.19E+01	3.95E+01	2.46E+01	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Nickel-63	1.06E+01	2.95E+01	1.80E+01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Nickel-63	1.02E+01	2.00E+01	1.24E+01	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Nickel-63	2.68E+00	4.01E+01	2.40E+01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Nickel-63	1.44E+00	3.97E+01	2.37E+01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Niobium-95	6.55E-02	1.49E+00	9.03E-01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Niobium-95	-9.43E-01	1.62E+00	1.39E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Niobium-95	-2.12E-01	1.31E+00	8.13E-01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Niobium-95	-7.15E-01	1.44E+00	9.99E-01	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Niobium-95	-1.20E+00	1.53E+00	1.74E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Niobium-95	1.91E-01	1.54E+00	9.25E-01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Niobium-95	-6.43E-01	1.54E+00	1.18E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Niobium-95	1.08E-01	1.53E+00	9.36E-01	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Niobium-95	-1.04E+00	1.25E+00	1.21E+00	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Niobium-95	4.68E-01	1.64E+00	9.97E-01	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Niobium-95	4.05E-02	1.22E+00	7.31E-01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Niobium-95	6.09E-01	1.87E+00	1.54E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Total Strontium	-1.07E-01	5.62E-01	3.26E-01	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Total Strontium	-4.48E-02	6.43E-01	3.78E-01	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Total Strontium	9.87E-01	1.15E+00	8.01E-01	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Total Strontium	-4.12E-01	9.63E-01	5.24E-01	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Total Strontium	3.70E-01	1.03E+00	6.67E-01	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Total Strontium	-5.97E-04	6.10E-01	3.63E-01	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Total Strontium	-3.94E-01	6.38E-01	3.27E-01	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Total Strontium	3.19E-02	8.80E-01	5.27E-01	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Total Strontium	6.05E-01	7.46E-01	5.33E-01	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Total Strontium	4.01E-02	1.40E+00	8.41E-01	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Total Strontium	2.49E-01	7.14E-01	4.59E-01	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Total Strontium	1.83E-01	7.44E-01	4.61E-01	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Tritium	-9.12E+01	2.78E+02	1.61E+02	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Tritium	5.34E+00	3.10E+02	1.85E+02	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Tritium	7.24E+01	2.90E+02	1.77E+02	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Tritium	-1.89E+01	2.73E+02	1.62E+02	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Tritium	6.73E+01	2.66E+02	1.63E+02	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Tritium	-1.43E+01	2.70E+02	1.60E+02	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Tritium	-3.13E+01	3.19E+02	1.88E+02	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Tritium	-1.59E+02	3.26E+02	1.87E+02	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Tritium	-8.39E+01	3.17E+02	1.85E+02	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Tritium	-7.60E+01	3.42E+02	1.99E+02	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Tritium	-8.93E+01	2.77E+02	1.61E+02	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Tritium	7.60E+01	3.73E+02	2.28E+02	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Zinc-65	1.33E+00	3.40E+00	2.19E+00	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Zinc-65	3.65E+00	4.22E+00	2.75E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Zinc-65	1.16E+00	2.90E+00	1.74E+00	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Zinc-65	-7.68E-02	3.08E+00	2.09E+00	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Zinc-65	9.79E-02	2.98E+00	1.75E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Zinc-65	4.11E-02	2.88E+00	1.89E+00	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Zinc-65	-1.02E+00	2.86E+00	1.86E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Zinc-65	-1.24E+00	2.92E+00	1.93E+00	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Zinc-65	-2.32E-01	2.66E+00	1.70E+00	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Zinc-65	9.34E-01	3.27E+00	1.90E+00	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Zinc-65	-7.02E-01	2.54E+00	1.56E+00	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Zinc-65	1.08E+00	3.41E+00	2.29E+00	pCi/L
5S2 Diablo Creek Weir(500502002) - DW	14-Jan-20	Zirconium-95	3.64E-01	2.87E+00	1.73E+00	pCi/L
5S2 Diablo Creek Weir(502412002) - DW	4-Feb-20	Zirconium-95	3.37E-01	2.71E+00	1.64E+00	pCi/L
5S2 Diablo Creek Weir(505351001) - DW	4-Mar-20	Zirconium-95	-2.17E-01	2.43E+00	1.48E+00	pCi/L
5S2 Diablo Creek Weir(508672002) - DW	7-Apr-20	Zirconium-95	1.52E+00	2.52E+00	2.38E+00	pCi/L
5S2 Diablo Creek Weir(509753001) - DW	6-May-20	Zirconium-95	1.12E+00	2.71E+00	1.66E+00	pCi/L
5S2 Diablo Creek Weir(512119002) - DW	2-Jun-20	Zirconium-95	1.35E+00	2.68E+00	1.63E+00	pCi/L
5S2 Diablo Creek Weir(514708002) - DW	7-Jul-20	Zirconium-95	5.55E-01	2.95E+00	1.78E+00	pCi/L
5S2 Diablo Creek Weir(516778002) - DW	4-Aug-20	Zirconium-95	-1.18E+00	2.37E+00	1.66E+00	pCi/L
5S2 Diablo Creek Weir(520032002) - DW	2-Sep-20	Zirconium-95	-6.76E-03	2.28E+00	1.38E+00	pCi/L
5S2 Diablo Creek Weir(522577002) - DW	6-Oct-20	Zirconium-95	3.46E-01	2.46E+00	1.49E+00	pCi/L
5S2 Diablo Creek Weir(525831002) - DW	3-Nov-20	Zirconium-95	1.30E-01	2.34E+00	1.39E+00	pCi/L
5S2 Diablo Creek Weir(528796002) - DW	2-Dec-20	Zirconium-95	3.04E-01	2.96E+00	1.74E+00	pCi/L

6C1 Household Garden - Vegetation

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
6C1 Household Garden(500502009) - VG Brdleaf	14-Jan-20	Cesium-134	-9.96E-01	1.47E+01	9.08E+00	pCi/kg
6C1 Household Garden(510173001) - VG Brdleaf	27-Apr-20	Cesium-134	1.37E+00	1.91E+01	1.15E+01	pCi/kg
6C1 Household Garden(515499001) - VG Brdleaf	6-Jul-20	Cesium-134	-8.15E-01	9.08E+00	5.61E+00	pCi/kg
6C1 Household Garden(523920001) - VG Brdleaf	7-Oct-20	Cesium-134	8.87E-01	1.11E+01	6.35E+00	pCi/kg
6C1 Household Garden(500502009) - VG Brdleaf	14-Jan-20	Cesium-137	1.17E-01	1.41E+01	1.16E+01	pCi/kg
6C1 Household Garden(510173001) - VG Brdleaf	27-Apr-20	Cesium-137	6.94E+00	1.84E+01	1.20E+01	pCi/kg
6C1 Household Garden(515499001) - VG Brdleaf	6-Jul-20	Cesium-137	-2.49E-01	8.43E+00	5.08E+00	pCi/kg
6C1 Household Garden(523920001) - VG Brdleaf	7-Oct-20	Cesium-137	9.23E-01	1.08E+01	6.54E+00	pCi/kg
6C1 Household Garden(500502009) - VG Brdleaf	14-Jan-20	Iodine-131	1.32E+00	1.65E+01	9.54E+00	pCi/kg
6C1 Household Garden(510173001) - VG Brdleaf	27-Apr-20	Iodine-131	4.52E+00	3.31E+01	1.93E+01	pCi/kg
6C1 Household Garden(515499001) - VG Brdleaf	6-Jul-20	Iodine-131	-5.94E+00	1.81E+01	1.11E+01	pCi/kg
6C1 Household Garden(523920001) - VG Brdleaf	7-Oct-20	Iodine-131	8.19E+00	2.02E+01	1.20E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

7C1 Pecho Creek Ruins - Vegetation

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7C1 Pecho Creek Ruins(500489004) - VG Brdleaf	13-Jan-20	Cesium-134	6.31E+00	1.28E+01	7.46E+00	pCi/kg
7C1 Pecho Creek Ruins(502413003) - VG Brdleaf	4-Feb-20	Cesium-134	3.23E+00	1.64E+01	9.43E+00	pCi/kg
7C1 Pecho Creek Ruins(505216004) - VG Brdleaf	2-Mar-20	Cesium-134	-2.18E+00	8.23E+00	5.22E+00	pCi/kg
7C1 Pecho Creek Ruins(508084004) - VG Brdleaf	6-Apr-20	Cesium-134	2.28E+00	1.15E+01	6.61E+00	pCi/kg
7C1 Pecho Creek Ruins(510659003) - VG Brdleaf	4-May-20	Cesium-134	-2.29E+00	1.17E+01	7.30E+00	pCi/kg
7C1 Pecho Creek Ruins(512048004) - VG Brdleaf	1-Jun-20	Cesium-134	2.19E+00	1.30E+01	7.77E+00	pCi/kg
7C1 Pecho Creek Ruins(514203004) - VG Brdleaf	6-Jul-20	Cesium-134	4.63E+00	1.39E+01	8.13E+00	pCi/kg
7C1 Pecho Creek Ruins(517958005) - VG Brdleaf	11-Aug-20	Cesium-134	7.16E-01	7.02E+00	4.19E+00	pCi/kg
7C1 Pecho Creek Ruins(520363004) - VG Brdleaf	8-Sep-20	Cesium-134	3.40E+00	1.09E+01	6.48E+00	pCi/kg
7C1 Pecho Creek Ruins(523232003) - VG Brdleaf	5-Oct-20	Cesium-134	-7.96E-01	1.03E+01	6.33E+00	pCi/kg
7C1 Pecho Creek Ruins(525832003) - VG Brdleaf	2-Nov-20	Cesium-134	8.76E-01	6.32E+00	3.77E+00	pCi/kg
7C1 Pecho Creek Ruins(528798004) - VG Brdleaf	1-Dec-20	Cesium-134	-4.04E+00	1.31E+01	8.62E+00	pCi/kg
7C1 Pecho Creek Ruins(500489004) - VG Brdleaf	13-Jan-20	Cesium-137	9.67E+00	1.20E+01	1.29E+01	pCi/kg
7C1 Pecho Creek Ruins(502413003) - VG Brdleaf	4-Feb-20	Cesium-137	-4.89E+00	1.43E+01	1.20E+01	pCi/kg
7C1 Pecho Creek Ruins(505216004) - VG Brdleaf	2-Mar-20	Cesium-137	-3.11E+00	7.63E+00	6.96E+00	pCi/kg
7C1 Pecho Creek Ruins(508084004) - VG Brdleaf	6-Apr-20	Cesium-137	1.49E+00	1.07E+01	9.21E+00	pCi/kg
7C1 Pecho Creek Ruins(510659003) - VG Brdleaf	4-May-20	Cesium-137	2.21E+00	1.21E+01	6.89E+00	pCi/kg
7C1 Pecho Creek Ruins(512048004) - VG Brdleaf	1-Jun-20	Cesium-137	2.99E+00	1.19E+01	7.01E+00	pCi/kg
7C1 Pecho Creek Ruins(514203004) - VG Brdleaf	6-Jul-20	Cesium-137	5.43E+00	1.27E+01	7.47E+00	pCi/kg
7C1 Pecho Creek Ruins(517958005) - VG Brdleaf	11-Aug-20	Cesium-137	1.46E+00	6.05E+00	3.57E+00	pCi/kg
7C1 Pecho Creek Ruins(520363004) - VG Brdleaf	8-Sep-20	Cesium-137	8.07E+00	1.17E+01	7.36E+00	pCi/kg
7C1 Pecho Creek Ruins(523232003) - VG Brdleaf	5-Oct-20	Cesium-137	-1.18E+00	1.00E+01	6.15E+00	pCi/kg
7C1 Pecho Creek Ruins(525832003) - VG Brdleaf	2-Nov-20	Cesium-137	2.09E+00	6.77E+00	4.00E+00	pCi/kg
7C1 Pecho Creek Ruins(528798004) - VG Brdleaf	1-Dec-20	Cesium-137	2.53E+00	1.23E+01	7.33E+00	pCi/kg
7C1 Pecho Creek Ruins(500489004) - VG Brdleaf	13-Jan-20	Iodine-131	-9.49E-01	1.39E+01	8.20E+00	pCi/kg
7C1 Pecho Creek Ruins(502413003) - VG Brdleaf	4-Feb-20	Iodine-131	-1.19E+01	2.22E+01	1.50E+01	pCi/kg
7C1 Pecho Creek Ruins(505216004) - VG Brdleaf	2-Mar-20	Iodine-131	-2.22E+00	9.03E+00	5.41E+00	pCi/kg
7C1 Pecho Creek Ruins(508084004) - VG Brdleaf	6-Apr-20	Iodine-131	1.40E+00	1.23E+01	7.27E+00	pCi/kg
7C1 Pecho Creek Ruins(510659003) - VG Brdleaf	4-May-20	Iodine-131	-2.67E+00	1.27E+01	7.97E+00	pCi/kg
7C1 Pecho Creek Ruins(512048004) - VG Brdleaf	1-Jun-20	Iodine-131	4.75E+00	1.34E+01	7.82E+00	pCi/kg
7C1 Pecho Creek Ruins(514203004) - VG Brdleaf	6-Jul-20	Iodine-131	-2.64E+00	1.43E+01	8.92E+00	pCi/kg
7C1 Pecho Creek Ruins(517958005) - VG Brdleaf	11-Aug-20	Iodine-131	2.33E+00	1.27E+01	7.41E+00	pCi/kg
7C1 Pecho Creek Ruins(520363004) - VG Brdleaf	8-Sep-20	Iodine-131	2.71E-01	1.52E+01	8.84E+00	pCi/kg
7C1 Pecho Creek Ruins(523232003) - VG Brdleaf	5-Oct-20	Iodine-131	8.38E-01	1.34E+01	7.71E+00	pCi/kg
7C1 Pecho Creek Ruins(525832003) - VG Brdleaf	2-Nov-20	Iodine-131	-1.42E+00	8.36E+00	4.98E+00	pCi/kg
7C1 Pecho Creek Ruins(528798004) - VG Brdleaf	1-Dec-20	Iodine-131	-2.62E+00	2.03E+01	1.21E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon - Aquatic Vegetation Algae

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7C2 Rattlesnake Canyon(500916005) - AV Algae	21-Jan-20	Cesium-134	-1.24E+00	1.26E+01	7.71E+00	pCi/kg
7C2 Rattlesnake Canyon(509741004) - AV Algae	14-Apr-20	Cesium-134	-9.48E+00	9.78E+00	8.99E+00	pCi/kg
7C2 Rattlesnake Canyon(515653004) - AV Algae	23-Jul-20	Cesium-134	-6.59E-01	5.64E+00	3.52E+00	pCi/kg
7C2 Rattlesnake Canyon(525424001) - AV Algae	27-Oct-20	Cesium-134	3.17E+00	9.12E+00	5.24E+00	pCi/kg
7C2 Rattlesnake Canyon(500916005) - AV Algae	21-Jan-20	Cesium-137	7.53E+00	1.36E+01	8.08E+00	pCi/kg
7C2 Rattlesnake Canyon(509741004) - AV Algae	14-Apr-20	Cesium-137	3.44E-01	9.18E+00	5.46E+00	pCi/kg
7C2 Rattlesnake Canyon(515653004) - AV Algae	23-Jul-20	Cesium-137	-8.42E-01	5.81E+00	3.61E+00	pCi/kg
7C2 Rattlesnake Canyon(525424001) - AV Algae	27-Oct-20	Cesium-137	7.29E+00	7.29E+00	6.62E+00	pCi/kg
7C2 Rattlesnake Canyon(500916005) - AV Algae	21-Jan-20	Cobalt-58	-3.91E+00	1.06E+01	7.14E+00	pCi/kg
7C2 Rattlesnake Canyon(509741004) - AV Algae	14-Apr-20	Cobalt-58	5.01E-01	9.55E+00	5.74E+00	pCi/kg
7C2 Rattlesnake Canyon(515653004) - AV Algae	23-Jul-20	Cobalt-58	-2.80E+00	4.93E+00	3.65E+00	pCi/kg
7C2 Rattlesnake Canyon(525424001) - AV Algae	27-Oct-20	Cobalt-58	4.46E-01	7.78E+00	4.54E+00	pCi/kg
7C2 Rattlesnake Canyon(500916005) - AV Algae	21-Jan-20	Cobalt-60	6.11E+00	1.56E+01	8.71E+00	pCi/kg
7C2 Rattlesnake Canyon(509741004) - AV Algae	14-Apr-20	Cobalt-60	2.20E+00	1.01E+01	6.24E+00	pCi/kg
7C2 Rattlesnake Canyon(515653004) - AV Algae	23-Jul-20	Cobalt-60	8.68E+00	8.68E+00	7.37E+00	pCi/kg
7C2 Rattlesnake Canyon(525424001) - AV Algae	27-Oct-20	Cobalt-60	3.20E+00	9.71E+00	5.65E+00	pCi/kg

7C2 Rattlesnake Canyon - Aquatic Vegetation Kelp

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7C2 Rattlesnake Canyon(501627001) - AV Kelp	23-Jan-20	Cesium-134	-3.74E+00	9.19E+00	6.18E+00	pCi/kg
7C2 Rattlesnake Canyon(509770002) - AV Kelp	13-Apr-20	Cesium-134	2.88E+00	9.30E+00	5.56E+00	pCi/kg
7C2 Rattlesnake Canyon(514717002) - AV Kelp	14-Jul-20	Cesium-134	-1.61E+00	1.31E+01	8.10E+00	pCi/kg
7C2 Rattlesnake Canyon(522578004) - AV Kelp	19-Oct-20	Cesium-134	-1.45E-01	7.18E+00	4.33E+00	pCi/kg
7C2 Rattlesnake Canyon(525420004) - AV Kelp	26-Oct-20	Cesium-134	8.27E-01	8.56E+00	4.94E+00	pCi/kg
7C2 Rattlesnake Canyon(501627001) - AV Kelp	23-Jan-20	Cesium-137	7.63E-01	8.69E+00	5.12E+00	pCi/kg
7C2 Rattlesnake Canyon(509770002) - AV Kelp	13-Apr-20	Cesium-137	1.74E+00	7.92E+00	4.89E+00	pCi/kg
7C2 Rattlesnake Canyon(514717002) - AV Kelp	14-Jul-20	Cesium-137	1.37E+00	1.15E+01	6.74E+00	pCi/kg
7C2 Rattlesnake Canyon(522578004) - AV Kelp	19-Oct-20	Cesium-137	3.62E+00	6.65E+00	4.04E+00	pCi/kg
7C2 Rattlesnake Canyon(525420004) - AV Kelp	26-Oct-20	Cesium-137	-2.88E+00	7.15E+00	4.55E+00	pCi/kg
7C2 Rattlesnake Canyon(501627001) - AV Kelp	23-Jan-20	Cobalt-58	7.54E-01	9.14E+00	5.46E+00	pCi/kg
7C2 Rattlesnake Canyon(509770002) - AV Kelp	13-Apr-20	Cobalt-58	1.96E+00	7.90E+00	4.70E+00	pCi/kg
7C2 Rattlesnake Canyon(514717002) - AV Kelp	14-Jul-20	Cobalt-58	2.21E+00	1.22E+01	7.24E+00	pCi/kg
7C2 Rattlesnake Canyon(522578004) - AV Kelp	19-Oct-20	Cobalt-58	-8.94E-01	6.67E+00	4.10E+00	pCi/kg
7C2 Rattlesnake Canyon(525420004) - AV Kelp	26-Oct-20	Cobalt-58	2.23E-01	7.54E+00	4.38E+00	pCi/kg
7C2 Rattlesnake Canyon(501627001) - AV Kelp	23-Jan-20	Cobalt-60	5.72E-01	1.10E+01	7.52E+00	pCi/kg
7C2 Rattlesnake Canyon(509770002) - AV Kelp	13-Apr-20	Cobalt-60	-1.17E+00	1.04E+01	6.24E+00	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(514717002) - AV Kelp	14-Jul-20	Cobalt-60	6.81E+00	1.48E+01	8.50E+00	pCi/kg
7C2 Rattlesnake Canyon(522578004) - AV Kelp	19-Oct-20	Cobalt-60	6.84E+00	7.51E+00	8.67E+00	pCi/kg
7C2 Rattlesnake Canyon(525420004) - AV Kelp	26-Oct-20	Cobalt-60	-9.04E-01	8.28E+00	5.48E+00	pCi/kg

7C2 Rattlesnake Canyon - Fish Perch

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7C2 Rattlesnake Canyon(504740008) - FH Perch	20-Feb-20	Cesium-134	6.41E-01	2.26E+01	1.33E+01	pCi/kg
7C2 Rattlesnake Canyon(513081002) - FH Perch	3-Jun-20	Cesium-134	-5.77E+00	2.55E+01	1.68E+01	pCi/kg
7C2 Rattlesnake Canyon(517473005) - FH Perch	27-Jul-20	Cesium-134	1.30E+00	2.26E+01	1.38E+01	pCi/kg
7C2 Rattlesnake Canyon(523223004) - FH Perch	9-Oct-20	Cesium-134	-9.60E-01	2.16E+01	1.27E+01	pCi/kg
7C2 Rattlesnake Canyon(504740008) - FH Perch	20-Feb-20	Cesium-137	1.36E+01	2.42E+01	1.45E+01	pCi/kg
7C2 Rattlesnake Canyon(513081002) - FH Perch	3-Jun-20	Cesium-137	1.18E+01	2.43E+01	2.81E+01	pCi/kg
7C2 Rattlesnake Canyon(517473005) - FH Perch	27-Jul-20	Cesium-137	1.87E+01	1.87E+01	2.45E+01	pCi/kg
7C2 Rattlesnake Canyon(523223004) - FH Perch	9-Oct-20	Cesium-137	1.11E+00	2.08E+01	1.20E+01	pCi/kg
7C2 Rattlesnake Canyon(504740008) - FH Perch	20-Feb-20	Cobalt-58	9.85E+00	2.54E+01	1.49E+01	pCi/kg
7C2 Rattlesnake Canyon(513081002) - FH Perch	3-Jun-20	Cobalt-58	4.21E+00	2.33E+01	1.40E+01	pCi/kg
7C2 Rattlesnake Canyon(517473005) - FH Perch	27-Jul-20	Cobalt-58	-5.78E+00	1.96E+01	1.27E+01	pCi/kg
7C2 Rattlesnake Canyon(523223004) - FH Perch	9-Oct-20	Cobalt-58	8.06E+00	2.27E+01	1.31E+01	pCi/kg
7C2 Rattlesnake Canyon(504740008) - FH Perch	20-Feb-20	Cobalt-60	-5.33E-02	2.50E+01	1.55E+01	pCi/kg
7C2 Rattlesnake Canyon(513081002) - FH Perch	3-Jun-20	Cobalt-60	1.65E+01	3.53E+01	3.46E+01	pCi/kg
7C2 Rattlesnake Canyon(517473005) - FH Perch	27-Jul-20	Cobalt-60	3.66E+00	2.20E+01	1.31E+01	pCi/kg
7C2 Rattlesnake Canyon(523223004) - FH Perch	9-Oct-20	Cobalt-60	1.01E+01	2.04E+01	1.37E+01	pCi/kg
7C2 Rattlesnake Canyon(504740008) - FH Perch	20-Feb-20	Iron-59	3.88E+00	5.22E+01	3.14E+01	pCi/kg
7C2 Rattlesnake Canyon(513081002) - FH Perch	3-Jun-20	Iron-59	1.04E+01	6.62E+01	4.31E+01	pCi/kg
7C2 Rattlesnake Canyon(517473005) - FH Perch	27-Jul-20	Iron-59	1.04E+01	4.83E+01	2.84E+01	pCi/kg
7C2 Rattlesnake Canyon(523223004) - FH Perch	9-Oct-20	Iron-59	-2.61E+01	4.49E+01	3.65E+01	pCi/kg
7C2 Rattlesnake Canyon(504740008) - FH Perch	20-Feb-20	Manganese-54	1.48E+01	2.55E+01	1.55E+01	pCi/kg
7C2 Rattlesnake Canyon(513081002) - FH Perch	3-Jun-20	Manganese-54	8.45E+00	2.78E+01	1.67E+01	pCi/kg
7C2 Rattlesnake Canyon(517473005) - FH Perch	27-Jul-20	Manganese-54	1.34E+01	2.02E+01	1.43E+01	pCi/kg
7C2 Rattlesnake Canyon(523223004) - FH Perch	9-Oct-20	Manganese-54	3.72E-01	1.96E+01	1.14E+01	pCi/kg
7C2 Rattlesnake Canyon(504740008) - FH Perch	20-Feb-20	Zinc-65	6.84E+00	5.15E+01	3.50E+01	pCi/kg
7C2 Rattlesnake Canyon(513081002) - FH Perch	3-Jun-20	Zinc-65	-3.85E+01	5.79E+01	5.52E+01	pCi/kg
7C2 Rattlesnake Canyon(517473005) - FH Perch	27-Jul-20	Zinc-65	3.87E+01	4.04E+01	4.04E+01	pCi/kg
7C2 Rattlesnake Canyon(523223004) - FH Perch	9-Oct-20	Zinc-65	1.13E+01	4.71E+01	2.74E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon - Rockfish

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7C2 Rattlesnake Canyon(504740004) - FH Rockfsh	20-Feb-20	Cesium-134	1.54E+01	2.21E+01	1.43E+01	pCi/kg
7C2 Rattlesnake Canyon(513081007) - FH Rockfsh	3-Jun-20	Cesium-134	-4.72E+00	2.45E+01	1.52E+01	pCi/kg
7C2 Rattlesnake Canyon(517473006) - FH Rockfsh	27-Jul-20	Cesium-134	1.47E+01	3.10E+01	1.93E+01	pCi/kg
7C2 Rattlesnake Canyon(525676001) - FH Rockfsh	9-Oct-20	Cesium-134	5.21E+00	3.20E+01	1.91E+01	pCi/kg
7C2 Rattlesnake Canyon(504740004) - FH Rockfsh	20-Feb-20	Cesium-137	1.34E+01	2.22E+01	1.41E+01	pCi/kg
7C2 Rattlesnake Canyon(513081007) - FH Rockfsh	3-Jun-20	Cesium-137	2.42E+01	2.42E+01	2.23E+01	pCi/kg
7C2 Rattlesnake Canyon(517473006) - FH Rockfsh	27-Jul-20	Cesium-137	8.69E+00	2.80E+01	1.72E+01	pCi/kg
7C2 Rattlesnake Canyon(525676001) - FH Rockfsh	9-Oct-20	Cesium-137	2.42E+01	2.73E+01	1.94E+01	pCi/kg
7C2 Rattlesnake Canyon(504740004) - FH Rockfsh	20-Feb-20	Cobalt-58	-5.83E+00	1.90E+01	1.23E+01	pCi/kg
7C2 Rattlesnake Canyon(513081007) - FH Rockfsh	3-Jun-20	Cobalt-58	5.69E+00	2.59E+01	1.51E+01	pCi/kg
7C2 Rattlesnake Canyon(517473006) - FH Rockfsh	27-Jul-20	Cobalt-58	8.63E+00	3.08E+01	1.91E+01	pCi/kg
7C2 Rattlesnake Canyon(525676001) - FH Rockfsh	9-Oct-20	Cobalt-58	-1.94E+00	3.16E+01	2.19E+01	pCi/kg
7C2 Rattlesnake Canyon(504740004) - FH Rockfsh	20-Feb-20	Cobalt-60	6.80E-01	1.94E+01	1.17E+01	pCi/kg
7C2 Rattlesnake Canyon(513081007) - FH Rockfsh	3-Jun-20	Cobalt-60	1.46E+01	2.69E+01	1.73E+01	pCi/kg
7C2 Rattlesnake Canyon(517473006) - FH Rockfsh	27-Jul-20	Cobalt-60	-1.40E+01	2.84E+01	2.04E+01	pCi/kg
7C2 Rattlesnake Canyon(525676001) - FH Rockfsh	9-Oct-20	Cobalt-60	5.32E+00	3.04E+01	1.75E+01	pCi/kg
7C2 Rattlesnake Canyon(504740004) - FH Rockfsh	20-Feb-20	Iron-59	6.78E-01	4.32E+01	2.58E+01	pCi/kg
7C2 Rattlesnake Canyon(513081007) - FH Rockfsh	3-Jun-20	Iron-59	-1.56E+01	5.10E+01	3.88E+01	pCi/kg
7C2 Rattlesnake Canyon(517473006) - FH Rockfsh	27-Jul-20	Iron-59	-1.42E+01	7.06E+01	4.46E+01	pCi/kg
7C2 Rattlesnake Canyon(525676001) - FH Rockfsh	9-Oct-20	Iron-59	-3.32E+01	7.66E+01	5.04E+01	pCi/kg
7C2 Rattlesnake Canyon(504740004) - FH Rockfsh	20-Feb-20	Manganese-54	4.70E+00	1.93E+01	1.12E+01	pCi/kg
7C2 Rattlesnake Canyon(513081007) - FH Rockfsh	3-Jun-20	Manganese-54	1.72E+00	2.51E+01	1.49E+01	pCi/kg
7C2 Rattlesnake Canyon(517473006) - FH Rockfsh	27-Jul-20	Manganese-54	-2.26E+00	2.96E+01	2.34E+01	pCi/kg
7C2 Rattlesnake Canyon(525676001) - FH Rockfsh	9-Oct-20	Manganese-54	3.05E+00	2.72E+01	1.64E+01	pCi/kg
7C2 Rattlesnake Canyon(504740004) - FH Rockfsh	20-Feb-20	Zinc-65	-5.79E+00	4.18E+01	2.58E+01	pCi/kg
7C2 Rattlesnake Canyon(513081007) - FH Rockfsh	3-Jun-20	Zinc-65	2.06E+01	5.78E+01	3.42E+01	pCi/kg
7C2 Rattlesnake Canyon(517473006) - FH Rockfsh	27-Jul-20	Zinc-65	-2.33E+01	5.53E+01	3.77E+01	pCi/kg
7C2 Rattlesnake Canyon(525676001) - FH Rockfsh	9-Oct-20	Zinc-65	3.97E+01	7.37E+01	4.35E+01	pCi/kg

7C2 Rattlesnake Canyon - Intertidal Mussel

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7C2 Rattlesnake Canyon(500916003) - IM	21-Jan-20	Cesium-134	-4.61E+00	1.92E+01	1.23E+01	pCi/kg
7C2 Rattlesnake Canyon(509741003) - IM	14-Apr-20	Cesium-134	2.26E+00	1.65E+01	9.86E+00	pCi/kg
7C2 Rattlesnake Canyon(515653002) - IM	23-Jul-20	Cesium-134	2.33E+00	2.78E+01	1.65E+01	pCi/kg
7C2 Rattlesnake Canyon(523223009) - IM	27-Oct-20	Cesium-134	1.90E+00	2.11E+01	1.27E+01	pCi/kg
7C2 Rattlesnake Canyon(500916003) - IM	21-Jan-20	Cesium-137	3.60E+00	1.76E+01	1.06E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(509741003) - IM	14-Apr-20	Cesium-137	-4.00E+00	1.68E+01	1.37E+01	pCi/kg
7C2 Rattlesnake Canyon(515653002) - IM	23-Jul-20	Cesium-137	4.14E+00	2.51E+01	1.51E+01	pCi/kg
7C2 Rattlesnake Canyon(523223009) - IM	27-Oct-20	Cesium-137	-1.57E+01	2.04E+01	1.98E+01	pCi/kg
7C2 Rattlesnake Canyon(500916003) - IM	21-Jan-20	Cobalt-58	-6.43E+00	1.80E+01	1.20E+01	pCi/kg
7C2 Rattlesnake Canyon(509741003) - IM	14-Apr-20	Cobalt-58	3.40E+00	1.58E+01	9.40E+00	pCi/kg
7C2 Rattlesnake Canyon(515653002) - IM	23-Jul-20	Cobalt-58	1.30E+01	2.73E+01	1.64E+01	pCi/kg
7C2 Rattlesnake Canyon(523223009) - IM	27-Oct-20	Cobalt-58	4.36E+00	2.10E+01	1.25E+01	pCi/kg
7C2 Rattlesnake Canyon(500916003) - IM	21-Jan-20	Cobalt-60	-5.08E-01	1.80E+01	1.23E+01	pCi/kg
7C2 Rattlesnake Canyon(509741003) - IM	14-Apr-20	Cobalt-60	-2.00E-02	1.65E+01	9.74E+00	pCi/kg
7C2 Rattlesnake Canyon(515653002) - IM	23-Jul-20	Cobalt-60	-3.01E+00	2.68E+01	1.86E+01	pCi/kg
7C2 Rattlesnake Canyon(523223009) - IM	27-Oct-20	Cobalt-60	7.02E-01	2.12E+01	1.27E+01	pCi/kg
7C2 Rattlesnake Canyon(500916003) - IM	21-Jan-20	Iron-59	-8.80E+00	3.85E+01	2.42E+01	pCi/kg
7C2 Rattlesnake Canyon(509741003) - IM	14-Apr-20	Iron-59	-4.36E+00	3.31E+01	2.14E+01	pCi/kg
7C2 Rattlesnake Canyon(515653002) - IM	23-Jul-20	Iron-59	5.01E+00	6.09E+01	3.63E+01	pCi/kg
7C2 Rattlesnake Canyon(523223009) - IM	27-Oct-20	Iron-59	2.71E+00	3.91E+01	2.27E+01	pCi/kg
7C2 Rattlesnake Canyon(500916003) - IM	21-Jan-20	Manganese-54	7.36E+00	1.87E+01	1.11E+01	pCi/kg
7C2 Rattlesnake Canyon(509741003) - IM	14-Apr-20	Manganese-54	9.25E+00	1.60E+01	1.13E+01	pCi/kg
7C2 Rattlesnake Canyon(515653002) - IM	23-Jul-20	Manganese-54	2.17E+00	2.54E+01	1.48E+01	pCi/kg
7C2 Rattlesnake Canyon(523223009) - IM	27-Oct-20	Manganese-54	6.02E-01	1.74E+01	1.07E+01	pCi/kg
7C2 Rattlesnake Canyon(500916003) - IM	21-Jan-20	Zinc-65	1.70E+00	3.74E+01	2.60E+01	pCi/kg
7C2 Rattlesnake Canyon(509741003) - IM	14-Apr-20	Zinc-65	7.11E+00	3.42E+01	2.06E+01	pCi/kg
7C2 Rattlesnake Canyon(515653002) - IM	23-Jul-20	Zinc-65	-3.65E+01	5.77E+01	4.07E+01	pCi/kg
7C2 Rattlesnake Canyon(523223009) - IM	27-Oct-20	Zinc-65	-5.83E+00	4.34E+01	2.66E+01	pCi/kg

7C2 Rattlesnake Canyon - Ocean Sediment

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Barium-140	3.64E+01	3.05E+02	1.72E+02	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Cesium-134	1.90E+01	5.31E+01	2.93E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Cesium-137	3.54E+01	5.35E+01	3.19E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Cobalt-58	-1.11E+01	4.84E+01	2.93E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Cobalt-60	-1.26E+00	4.56E+01	2.65E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Iron-55	1.47E+03	9.08E+03	6.76E+03	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Iron-59	9.38E+00	1.10E+02	6.39E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Lanthanum-140	-7.57E+00	9.72E+01	6.39E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Manganese-54	7.75E+00	4.84E+01	2.70E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Nickel-63	2.36E+02	2.13E+03	1.28E+03	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Niobium-95	-1.55E+01	3.95E+01	2.95E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Total Strontium	-1.96E+02	3.86E+02	2.09E+02	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Zinc-65	3.40E+01	1.07E+02	6.81E+01	pCi/kg
7C2 Rattlesnake Canyon(505076002) - SD	20-Feb-20	Zirconium-95	-2.32E+01	7.51E+01	4.66E+01	pCi/kg

7C2 Rattlesnake Canyon - Seawater

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	BETA	5.23E+02	1.62E+02	1.38E+02	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	BETA	3.13E+02	1.47E+02	1.10E+02	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	BETA	2.97E+02	9.94E+01	8.55E+01	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	BETA	3.82E+02	1.30E+02	1.10E+02	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	BETA	2.30E+02	1.73E+02	1.16E+02	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	BETA	2.70E+02	1.28E+02	9.60E+01	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	BETA	3.67E+02	1.58E+02	1.20E+02	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	BETA	4.68E+02	1.19E+02	1.16E+02	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	BETA	3.56E+02	1.75E+02	1.27E+02	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	BETA	2.41E+02	1.76E+02	1.17E+02	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	BETA	2.64E+02	1.14E+02	8.83E+01	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	BETA	2.73E+02	9.07E+01	8.04E+01	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	BETA	2.57E+02	1.44E+02	1.02E+02	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	BETA	1.51E+02	1.22E+02	8.15E+01	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Barium-140	1.24E+00	9.40E+00	5.76E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Barium-140	1.01E+00	8.30E+00	4.90E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Barium-140	-4.12E+00	6.70E+00	6.19E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Barium-140	-3.26E+00	7.22E+00	4.93E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Barium-140	-1.43E+00	1.01E+01	6.09E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Barium-140	4.34E-01	7.88E+00	4.80E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Barium-140	1.88E-01	7.11E+00	4.16E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Barium-140	4.69E+00	8.11E+00	5.63E+00	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Barium-140	1.18E+00	9.34E+00	5.72E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Barium-140	-4.11E+00	8.77E+00	5.80E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Barium-140	6.86E+00	6.86E+00	7.69E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Barium-140	1.46E+00	6.44E+00	3.78E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Barium-140	1.34E+00	7.29E+00	4.36E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Barium-140	-1.42E-01	7.79E+00	4.82E+00	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Cesium-134	-6.97E-01	1.72E+00	1.11E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Cesium-134	4.96E-02	1.77E+00	1.09E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Cesium-134	-3.10E-02	1.39E+00	8.51E-01	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Cesium-134	-1.65E-03	1.86E+00	1.10E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Cesium-134	3.45E-02	2.01E+00	1.22E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Cesium-134	6.11E-02	2.27E+00	1.32E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Cesium-134	8.33E-01	1.38E+00	1.18E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Cesium-134	-3.78E-01	1.60E+00	9.75E-01	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Cesium-134	9.66E-02	1.74E+00	1.02E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Cesium-134	-7.76E-01	1.71E+00	1.17E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Cesium-134	4.36E-01	1.49E+00	8.84E-01	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Cesium-134	-4.82E-01	1.47E+00	1.27E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Cesium-134	-2.92E-01	1.63E+00	1.00E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Cesium-134	4.73E-01	1.68E+00	9.85E-01	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Cesium-137	7.23E-01	1.79E+00	1.05E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Cesium-137	1.07E+00	1.88E+00	1.17E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Cesium-137	-3.00E-01	1.49E+00	1.32E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Cesium-137	-4.77E-01	1.81E+00	1.10E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Cesium-137	-1.14E-01	1.82E+00	1.24E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Cesium-137	-8.08E-03	2.03E+00	1.18E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Cesium-137	-3.14E-01	1.51E+00	1.58E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Cesium-137	1.86E-01	1.48E+00	8.47E-01	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Cesium-137	4.59E-01	1.80E+00	1.34E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Cesium-137	-1.44E+00	1.89E+00	2.13E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Cesium-137	6.34E-01	1.35E+00	1.22E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Cesium-137	-8.81E-02	1.48E+00	8.93E-01	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Cesium-137	-9.77E-01	1.63E+00	1.39E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Cesium-137	4.87E-01	1.55E+00	1.01E+00	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Cobalt-58	1.34E-01	1.65E+00	9.65E-01	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Cobalt-58	-6.16E-01	1.69E+00	1.13E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Cobalt-58	-1.70E-01	1.41E+00	8.80E-01	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Cobalt-58	2.47E-01	1.74E+00	1.02E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Cobalt-58	-1.15E+00	1.57E+00	1.19E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Cobalt-58	-1.01E-01	1.78E+00	1.05E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Cobalt-58	-2.85E-01	1.26E+00	8.90E-01	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Cobalt-58	5.38E-01	1.51E+00	8.88E-01	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Cobalt-58	-5.59E-01	1.51E+00	9.73E-01	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Cobalt-58	1.83E+00	1.83E+00	3.06E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Cobalt-58	2.82E-01	1.24E+00	7.33E-01	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Cobalt-58	-6.39E-01	1.18E+00	8.32E-01	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Cobalt-58	1.27E-01	1.59E+00	9.39E-01	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Cobalt-58	-3.00E-01	1.41E+00	8.63E-01	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Cobalt-60	5.93E-01	1.68E+00	9.53E-01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Cobalt-60	7.38E-01	2.10E+00	1.38E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Cobalt-60	5.59E-01	1.49E+00	8.67E-01	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Cobalt-60	1.66E-01	2.03E+00	1.17E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Cobalt-60	3.26E-01	2.13E+00	1.23E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Cobalt-60	-4.89E-01	1.97E+00	1.28E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Cobalt-60	-1.10E+00	1.63E+00	1.63E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Cobalt-60	-2.03E-01	1.59E+00	9.43E-01	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Cobalt-60	3.10E-01	1.87E+00	1.07E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Cobalt-60	3.16E-01	2.00E+00	1.15E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Cobalt-60	4.85E-01	1.49E+00	8.55E-01	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Cobalt-60	6.20E-01	1.45E+00	9.33E-01	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Cobalt-60	7.96E-01	1.96E+00	1.16E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Cobalt-60	6.36E-01	1.63E+00	9.78E-01	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Iodine-131	2.32E+00	3.60E+00	2.49E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Iodine-131	8.34E-01	2.85E+00	1.65E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Iodine-131	4.29E-01	2.55E+00	1.46E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Iodine-131	-1.54E+00	2.56E+00	1.77E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Iodine-131	-2.82E-01	3.69E+00	2.15E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Iodine-131	-8.55E-01	2.05E+00	1.50E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Iodine-131	1.49E+00	3.00E+00	1.80E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Iodine-131	1.35E+00	2.85E+00	1.74E+00	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Iodine-131	4.92E-01	3.39E+00	2.03E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Iodine-131	-8.32E-02	3.51E+00	2.03E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Iodine-131	1.67E+00	2.55E+00	1.58E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Iodine-131	-3.49E-01	2.13E+00	1.26E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Iodine-131	-1.75E-01	2.30E+00	1.37E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Iodine-131	-1.88E-01	2.93E+00	1.78E+00	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Iron-55	2.68E+01	8.42E+01	6.18E+01	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Iron-55	-4.50E+00	9.08E+01	6.59E+01	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Iron-55	-3.17E+01	1.01E+02	7.19E+01	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Iron-55	-2.57E+01	8.42E+01	6.00E+01	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Iron-55	2.88E+01	1.39E+02	9.84E+01	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Iron-55	-7.11E+00	3.99E+01	2.56E+01	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Iron-55	-1.28E+01	5.17E+01	3.19E+01	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Iron-55	2.93E+01	7.86E+01	6.11E+01	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Iron-55	2.33E+01	8.32E+01	6.50E+01	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Iron-55	4.20E+00	1.27E+02	8.11E+01	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Iron-55	-6.74E+00	1.23E+02	7.83E+01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Iron-55	-3.49E+01	1.63E+02	9.99E+01	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Iron-55	4.16E+01	1.78E+02	1.13E+02	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Iron-55	-3.39E+00	1.30E+02	8.16E+01	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Iron-59	-2.91E+00	3.91E+00	4.80E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Iron-59	1.48E+00	3.93E+00	2.30E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Iron-59	4.29E-01	3.22E+00	1.85E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Iron-59	-3.42E-01	3.47E+00	2.14E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Iron-59	-9.80E-01	3.91E+00	2.39E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Iron-59	-7.37E-01	4.15E+00	2.58E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Iron-59	2.74E-01	2.79E+00	1.69E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Iron-59	-9.76E-01	3.05E+00	1.96E+00	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Iron-59	1.91E+00	4.09E+00	2.48E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Iron-59	-5.17E-01	4.11E+00	2.43E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Iron-59	-2.60E+00	2.56E+00	2.60E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Iron-59	4.92E-01	2.83E+00	1.62E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Iron-59	-4.06E-01	3.26E+00	1.97E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Iron-59	-8.88E-01	2.86E+00	1.84E+00	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Lanthanum-140	1.80E+00	3.46E+00	2.03E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Lanthanum-140	-1.11E+00	2.51E+00	1.76E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Lanthanum-140	9.38E-02	2.28E+00	1.36E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Lanthanum-140	4.95E-01	2.76E+00	1.59E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Lanthanum-140	-1.43E+00	2.80E+00	1.97E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Lanthanum-140	4.23E-01	2.79E+00	1.59E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Lanthanum-140	-4.57E-01	2.26E+00	1.39E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Lanthanum-140	7.70E-01	2.77E+00	1.61E+00	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Lanthanum-140	-1.45E-02	3.14E+00	1.85E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Lanthanum-140	-4.47E-01	2.97E+00	1.84E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Lanthanum-140	-3.48E-01	2.26E+00	1.39E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Lanthanum-140	-1.15E+00	1.93E+00	1.40E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Lanthanum-140	-2.51E-01	2.46E+00	1.53E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Lanthanum-140	-4.79E-03	2.59E+00	1.51E+00	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Manganese-54	9.56E-01	1.61E+00	1.63E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Manganese-54	4.37E-02	1.76E+00	1.01E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Manganese-54	-9.62E-01	1.28E+00	1.34E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Manganese-54	-1.20E+00	1.57E+00	1.47E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Manganese-54	-7.87E-01	1.79E+00	1.21E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Manganese-54	7.45E-01	2.13E+00	1.24E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Manganese-54	4.14E-01	1.40E+00	8.32E-01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Manganese-54	-1.44E-01	1.31E+00	7.82E-01	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Manganese-54	-2.16E-01	1.52E+00	9.21E-01	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Manganese-54	-4.13E-02	1.66E+00	1.01E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Manganese-54	-3.83E-01	1.25E+00	1.16E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Manganese-54	-2.48E-01	1.26E+00	9.01E-01	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Manganese-54	2.07E-01	1.57E+00	8.96E-01	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Manganese-54	-5.03E-01	1.36E+00	8.69E-01	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Nickel-63	8.10E+00	1.68E+01	1.04E+01	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Nickel-63	8.69E+00	2.89E+01	1.77E+01	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Nickel-63	-1.41E-01	2.12E+01	1.26E+01	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Nickel-63	9.99E+00	2.59E+01	1.60E+01	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Nickel-63	-7.05E-01	3.23E+01	1.92E+01	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Nickel-63	-5.21E+00	3.30E+01	1.94E+01	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Nickel-63	-1.92E+00	1.49E+01	8.81E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Nickel-63	1.24E+01	3.46E+01	2.12E+01	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Nickel-63	-1.28E+01	3.25E+01	1.89E+01	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Nickel-63	1.54E+01	4.36E+01	2.65E+01	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Nickel-63	1.46E+00	3.75E+01	2.24E+01	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Nickel-63	-4.46E+00	3.18E+01	1.88E+01	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Nickel-63	-1.40E+01	3.14E+01	1.82E+01	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Nickel-63	5.77E+00	2.46E+01	1.49E+01	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Niobium-95	1.01E+00	1.91E+00	1.16E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Niobium-95	2.22E-01	1.75E+00	1.06E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Niobium-95	-1.74E+00	1.50E+00	2.10E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Niobium-95	-1.05E+00	1.66E+00	1.15E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Niobium-95	5.16E-01	1.94E+00	1.16E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Niobium-95	-6.47E-01	1.99E+00	1.24E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Niobium-95	3.97E-01	1.44E+00	8.54E-01	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Niobium-95	4.29E-01	1.59E+00	9.28E-01	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Niobium-95	1.41E+00	1.92E+00	1.23E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Niobium-95	7.44E-01	1.91E+00	1.15E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Niobium-95	2.37E-01	1.42E+00	8.43E-01	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Niobium-95	-1.84E-01	1.40E+00	1.38E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Niobium-95	1.46E-01	1.57E+00	1.45E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Niobium-95	5.68E-01	1.67E+00	9.85E-01	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Total Strontium	-7.57E-01	1.62E+00	9.24E-01	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Total Strontium	-2.18E-01	1.38E+00	8.10E-01	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Total Strontium	-1.49E-01	3.33E+00	1.98E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Total Strontium	2.19E-01	3.01E+00	1.81E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Total Strontium	9.52E-01	2.70E+00	1.67E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Total Strontium	-1.98E+00	5.34E+00	3.12E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Total Strontium	5.28E+00	8.80E+00	6.03E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Total Strontium	-4.54E-01	3.51E+00	2.07E+00	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Total Strontium	1.03E+00	3.12E+00	1.92E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Total Strontium	2.21E+00	2.98E+00	1.91E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Total Strontium	-4.10E+00	5.62E+00	3.20E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Total Strontium	-3.03E-01	4.23E+00	2.51E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Total Strontium	1.18E+00	1.83E+00	1.18E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Total Strontium	1.41E+00	2.88E+00	1.79E+00	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Tritium	-6.28E+01	2.61E+02	1.52E+02	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Tritium	-7.46E+01	3.08E+02	1.80E+02	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Tritium	4.76E+01	2.90E+02	1.76E+02	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Tritium	-3.35E+01	2.41E+02	1.42E+02	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Tritium	1.40E+02	2.69E+02	1.69E+02	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Tritium	4.48E+01	3.05E+02	1.84E+02	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Tritium	-4.48E+01	2.75E+02	1.62E+02	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Tritium	1.05E+02	2.61E+02	1.62E+02	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Tritium	-6.79E+01	3.24E+02	1.90E+02	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Tritium	-1.22E+02	2.76E+02	1.59E+02	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Tritium	2.21E+02	3.18E+02	2.08E+02	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Tritium	2.25E+01	2.52E+02	1.51E+02	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Tritium	8.90E+00	2.52E+02	1.50E+02	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Tritium	1.80E+02	3.65E+02	2.31E+02	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Zinc-65	1.18E-01	3.69E+00	2.22E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Zinc-65	-1.20E+00	3.48E+00	2.24E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Zinc-65	-1.51E+00	2.76E+00	1.87E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Zinc-65	9.39E-01	3.94E+00	2.35E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Zinc-65	2.24E+00	4.10E+00	2.47E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Zinc-65	-5.20E-01	3.83E+00	2.36E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Zinc-65	2.09E+00	3.24E+00	2.05E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Zinc-65	4.52E-01	3.18E+00	2.16E+00	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Zinc-65	-1.61E+00	3.39E+00	2.32E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Zinc-65	1.65E+00	4.04E+00	4.92E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Zinc-65	1.82E+00	2.93E+00	1.89E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Zinc-65	-5.04E-01	2.73E+00	1.88E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Zinc-65	-3.42E+00	3.27E+00	3.59E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Zinc-65	-1.62E+00	3.21E+00	2.19E+00	pCi/L
7C2 Rattlesnake Canyon(501627006) - SW	23-Jan-20	Zirconium-95	7.66E-01	3.27E+00	1.90E+00	pCi/L
7C2 Rattlesnake Canyon(503808002) - SW	18-Feb-20	Zirconium-95	-1.68E+00	2.75E+00	2.00E+00	pCi/L
7C2 Rattlesnake Canyon(505737002) - SW	3-Mar-20	Zirconium-95	5.49E-01	2.44E+00	1.46E+00	pCi/L
7C2 Rattlesnake Canyon(508947001) - SW	13-Apr-20	Zirconium-95	-1.72E+00	2.81E+00	1.95E+00	pCi/L
7C2 Rattlesnake Canyon(510649002) - SW	11-May-20	Zirconium-95	-7.15E-01	3.41E+00	2.15E+00	pCi/L
7C2 Rattlesnake Canyon(513548002) - SW	22-Jun-20	Zirconium-95	-9.82E-01	3.46E+00	2.14E+00	pCi/L
7C2 Rattlesnake Canyon(514719002) - SW	14-Jul-20	Zirconium-95	2.37E-01	2.53E+00	1.50E+00	pCi/L
7C2 Rattlesnake Canyon(517385002) - SW	10-Aug-20	Zirconium-95	-1.16E+00	2.54E+00	1.64E+00	pCi/L
7C2 Rattlesnake Canyon(519822001) - SW	1-Sep-20	Zirconium-95	7.75E-02	3.09E+00	1.81E+00	pCi/L
7C2 Rattlesnake Canyon(524334002) - SW	19-Oct-20	Zirconium-95	-2.28E-01	3.10E+00	1.90E+00	pCi/L
7C2 Rattlesnake Canyon(525420002) - SW	26-Oct-20	Zirconium-95	-3.51E-01	2.08E+00	1.29E+00	pCi/L
7C2 Rattlesnake Canyon(526083002) - SW	5-Nov-20	Zirconium-95	1.85E-01	2.45E+00	1.47E+00	pCi/L
7C2 Rattlesnake Canyon(526083004) - SW	5-Nov-20	Zirconium-95	-1.75E+00	2.35E+00	2.68E+00	pCi/L
7C2 Rattlesnake Canyon(528799002) - SW	2-Dec-20	Zirconium-95	-1.26E+00	2.38E+00	1.59E+00	pCi/L

7D1 Avila Gate - Air Cartridge

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7D1 Avila Gate(500231008) - AC	4-Jan-20	Iodine-131	-8.38E-05	6.77E-03	3.94E-03	pCi/m3
7D1 Avila Gate(500490013) - AC	11-Jan-20	Iodine-131	-3.45E-03	8.46E-03	6.01E-03	pCi/m3
7D1 Avila Gate(501031004) - AC	18-Jan-20	Iodine-131	5.22E-04	8.23E-03	5.30E-03	pCi/m3
7D1 Avila Gate(502000004) - AC	25-Jan-20	Iodine-131	-5.21E-04	7.82E-03	4.75E-03	pCi/m3
7D1 Avila Gate(502411004) - AC	1-Feb-20	Iodine-131	-4.15E-03	6.49E-03	5.34E-03	pCi/m3
7D1 Avila Gate(503155006) - AC	8-Feb-20	Iodine-131	-2.64E-03	1.08E-02	6.91E-03	pCi/m3
7D1 Avila Gate(503851004) - AC	15-Feb-20	Iodine-131	-6.64E-04	8.13E-03	5.01E-03	pCi/m3
7D1 Avila Gate(504528004) - AC	22-Feb-20	Iodine-131	-3.34E-04	6.66E-03	3.98E-03	pCi/m3
7D1 Avila Gate(505332013) - AC	29-Feb-20	Iodine-131	-4.53E-03	8.34E-03	6.89E-03	pCi/m3
7D1 Avila Gate(505759006) - AC	7-Mar-20	Iodine-131	-2.72E-03	7.00E-03	4.74E-03	pCi/m3
7D1 Avila Gate(506435004) - AC	14-Mar-20	Iodine-131	-2.27E-03	8.20E-03	5.28E-03	pCi/m3
7D1 Avila Gate(507015004) - AC	21-Mar-20	Iodine-131	-4.14E-03	8.25E-03	6.28E-03	pCi/m3
7D1 Avila Gate(507592013) - AC	27-Mar-20	Iodine-131	1.86E-03	1.02E-02	5.88E-03	pCi/m3
7D1 Avila Gate(508867004) - AC	4-Apr-20	Iodine-131	-9.80E-04	8.07E-03	4.98E-03	pCi/m3
7D1 Avila Gate(508984006) - AC	11-Apr-20	Iodine-131	-1.74E-03	1.33E-02	7.91E-03	pCi/m3
7D1 Avila Gate(509370006) - AC	18-Apr-20	Iodine-131	-4.50E-03	8.91E-03	6.00E-03	pCi/m3
7D1 Avila Gate(509745004) - AC	25-Apr-20	Iodine-131	2.31E-03	9.07E-03	4.93E-03	pCi/m3
7D1 Avila Gate(510179004) - AC	2-May-20	Iodine-131	-1.49E-03	6.65E-03	4.21E-03	pCi/m3
7D1 Avila Gate(510640004) - AC	9-May-20	Iodine-131	7.86E-04	8.29E-03	4.68E-03	pCi/m3
7D1 Avila Gate(510747004) - AC	16-May-20	Iodine-131	4.99E-04	1.06E-02	6.32E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

7D1 Avila Gate(511437004) - AC	23-May-20	Iodine-131	-1.46E-03	9.02E-03	5.53E-03	pCi/m3
7D1 Avila Gate(512099004) - AC	30-May-20	Iodine-131	-4.72E-03	1.14E-02	7.35E-03	pCi/m3
7D1 Avila Gate(512380004) - AC	6-Jun-20	Iodine-131	2.04E-03	8.12E-03	4.81E-03	pCi/m3
7D1 Avila Gate(513083006) - AC	13-Jun-20	Iodine-131	3.55E-03	1.07E-02	6.73E-03	pCi/m3
7D1 Avila Gate(513584004) - AC	20-Jun-20	Iodine-131	-1.37E-03	1.21E-02	7.39E-03	pCi/m3
7D1 Avila Gate(514894014) - AC	27-Jun-20	Iodine-131	1.60E-03	9.36E-03	5.40E-03	pCi/m3
7D1 Avila Gate(514398004) - AC	4-Jul-20	Iodine-131	-2.41E-04	7.69E-03	4.46E-03	pCi/m3
7D1 Avila Gate(514716012) - AC	11-Jul-20	Iodine-131	1.91E-04	8.77E-03	5.14E-03	pCi/m3
7D1 Avila Gate(515649006) - AC	18-Jul-20	Iodine-131	6.40E-04	1.27E-02	7.56E-03	pCi/m3
7D1 Avila Gate(517082004) - AC	25-Jul-20	Iodine-131	2.10E-04	8.12E-03	4.92E-03	pCi/m3
7D1 Avila Gate(516773004) - AC	1-Aug-20	Iodine-131	1.19E-03	8.83E-03	4.91E-03	pCi/m3
7D1 Avila Gate(517339021) - AC	8-Aug-20	Iodine-131	2.13E-03	8.38E-03	4.76E-03	pCi/m3
7D1 Avila Gate(517997006) - AC	15-Aug-20	Iodine-131	-1.70E-03	9.13E-03	6.66E-03	pCi/m3
7D1 Avila Gate(518816016) - AC	22-Aug-20	Iodine-131	2.00E-03	7.78E-03	4.30E-03	pCi/m3
7D1 Avila Gate(518822016) - AC	29-Aug-20	Iodine-131	-2.93E-03	8.90E-03	5.86E-03	pCi/m3
7D1 Avila Gate(520288004) - AC	5-Sep-20	Iodine-131	1.29E-03	9.85E-03	5.44E-03	pCi/m3
7D1 Avila Gate(520368004) - AC	12-Sep-20	Iodine-131	6.66E-03	1.14E-02	6.45E-03	pCi/m3
7D1 Avila Gate(521272004) - AC	19-Sep-20	Iodine-131	6.96E-03	1.31E-02	6.24E-03	pCi/m3
7D1 Avila Gate(521863004) - AC	26-Sep-20	Iodine-131	1.07E-02	1.07E-02	1.29E-02	pCi/m3
7D1 Avila Gate(522576006) - AC	3-Oct-20	Iodine-131	2.73E-03	1.10E-02	6.02E-03	pCi/m3
7D1 Avila Gate(524007006) - AC	10-Oct-20	Iodine-131	-1.73E-04	9.06E-03	5.59E-03	pCi/m3
7D1 Avila Gate(524009013) - AC	17-Oct-20	Iodine-131	9.32E-04	1.05E-02	5.91E-03	pCi/m3
7D1 Avila Gate(524695004) - AC	24-Oct-20	Iodine-131	4.10E-03	1.08E-02	6.32E-03	pCi/m3
7D1 Avila Gate(525830004) - AC	31-Oct-20	Iodine-131	-9.69E-04	8.43E-03	5.07E-03	pCi/m3
7D1 Avila Gate(526380013) - AC	7-Nov-20	Iodine-131	6.60E-03	1.26E-02	6.98E-03	pCi/m3
7D1 Avila Gate(527613004) - AC	14-Nov-20	Iodine-131	1.47E-03	8.86E-03	5.19E-03	pCi/m3
7D1 Avila Gate(527712004) - AC	21-Nov-20	Iodine-131	4.76E-03	1.14E-02	6.18E-03	pCi/m3
7D1 Avila Gate(528790013) - AC	28-Nov-20	Iodine-131	-6.50E-03	3.71E-03	5.67E-03	pCi/m3
7D1 Avila Gate(528845006) - AC	5-Dec-20	Iodine-131	-2.77E-03	1.04E-02	6.67E-03	pCi/m3
7D1 Avila Gate(529341004) - AC	12-Dec-20	Iodine-131	-4.34E-04	6.85E-03	4.27E-03	pCi/m3
7D1 Avila Gate(530196006) - AC	19-Dec-20	Iodine-131	3.75E-03	1.00E-02	7.65E-03	pCi/m3
7D1 Avila Gate(530951004) - AC	25-Dec-20	Iodine-131	8.78E-05	9.05E-03	5.47E-03	pCi/m3

7D1 Avila Gate - Air Particulate

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7D1 Avila Gate(500231009) - AP	4-Jan-20	BETA	2.63E-02	2.28E-03	9.89E-03	pCi/m3
7D1 Avila Gate(500490014) - AP	11-Jan-20	BETA	8.73E-03	2.34E-03	1.13E-02	pCi/m3
7D1 Avila Gate(501031005) - AP	18-Jan-20	BETA	1.54E-02	2.22E-03	1.03E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

7D1 Avila Gate(502000005) - AP	25-Jan-20	BETA	1.24E-02	2.21E-03	1.40E-02	pCi/m3
7D1 Avila Gate(502411005) - AP	1-Feb-20	BETA	1.09E-02	2.16E-03	1.16E-02	pCi/m3
7D1 Avila Gate(503155007) - AP	8-Feb-20	BETA	2.09E-02	2.20E-03	1.01E-02	pCi/m3
7D1 Avila Gate(503851005) - AP	15-Feb-20	BETA	3.02E-02	2.16E-03	1.10E-02	pCi/m3
7D1 Avila Gate(504528005) - AP	22-Feb-20	BETA	3.33E-02	2.10E-03	1.12E-02	pCi/m3
7D1 Avila Gate(505332014) - AP	29-Feb-20	BETA	2.17E-02	2.17E-03	1.40E-02	pCi/m3
7D1 Avila Gate(505759007) - AP	7-Mar-20	BETA	1.28E-02	2.22E-03	1.20E-02	pCi/m3
7D1 Avila Gate(506435005) - AP	14-Mar-20	BETA	1.51E-02	2.01E-03	9.53E-03	pCi/m3
7D1 Avila Gate(507015005) - AP	21-Mar-20	BETA	1.26E-02	2.66E-03	1.11E-02	pCi/m3
7D1 Avila Gate(507592014) - AP	27-Mar-20	BETA	1.79E-02	2.45E-03	1.04E-02	pCi/m3
7D1 Avila Gate(508867005) - AP	4-Apr-20	BETA	1.09E-02	2.32E-03	9.02E-03	pCi/m3
7D1 Avila Gate(508984007) - AP	11-Apr-20	BETA	9.53E-03	2.42E-03	1.53E-02	pCi/m3
7D1 Avila Gate(509370007) - AP	18-Apr-20	BETA	1.96E-02	1.92E-03	1.03E-02	pCi/m3
7D1 Avila Gate(509745005) - AP	25-Apr-20	BETA	1.09E-02	2.05E-03	1.32E-02	pCi/m3
7D1 Avila Gate(510179005) - AP	2-May-20	BETA	1.55E-02	2.16E-03	1.23E-02	pCi/m3
7D1 Avila Gate(510640005) - AP	9-May-20	BETA	1.54E-02	2.75E-03	1.19E-02	pCi/m3
7D1 Avila Gate(510747005) - AP	16-May-20	BETA	1.36E-02	2.29E-03	1.08E-02	pCi/m3
7D1 Avila Gate(511437005) - AP	23-May-20	BETA	1.39E-02	2.60E-03	1.16E-02	pCi/m3
7D1 Avila Gate(512099005) - AP	30-May-20	BETA	6.81E-03	1.96E-03	1.03E-02	pCi/m3
7D1 Avila Gate(512380005) - AP	6-Jun-20	BETA	1.13E-02	2.30E-03	1.11E-02	pCi/m3
7D1 Avila Gate(513083007) - AP	13-Jun-20	BETA	8.76E-03	2.06E-03	1.06E-02	pCi/m3
7D1 Avila Gate(513584005) - AP	20-Jun-20	BETA	8.15E-03	2.20E-03	1.14E-02	pCi/m3
7D1 Avila Gate(514894004) - AP	27-Jun-20	BETA	6.39E-03	2.69E-03	1.26E-02	pCi/m3
7D1 Avila Gate(514398005) - AP	4-Jul-20	BETA	7.67E-03	1.98E-03	8.76E-03	pCi/m3
7D1 Avila Gate(514716013) - AP	11-Jul-20	BETA	1.48E-02	2.44E-03	1.02E-02	pCi/m3
7D1 Avila Gate(515649007) - AP	18-Jul-20	BETA	9.14E-03	2.53E-03	1.31E-02	pCi/m3
7D1 Avila Gate(517082005) - AP	25-Jul-20	BETA	9.83E-03	2.00E-03	9.21E-03	pCi/m3
7D1 Avila Gate(516773005) - AP	1-Aug-20	BETA	8.05E-03	2.25E-03	1.03E-02	pCi/m3
7D1 Avila Gate(517339022) - AP	8-Aug-20	BETA	8.43E-03	2.29E-03	1.14E-02	pCi/m3
7D1 Avila Gate(517997007) - AP	15-Aug-20	BETA	1.17E-02	2.29E-03	1.19E-02	pCi/m3
7D1 Avila Gate(518816017) - AP	22-Aug-20	BETA	1.41E-02	2.79E-03	1.30E-02	pCi/m3
7D1 Avila Gate(518822017) - AP	29-Aug-20	BETA	1.41E-02	2.19E-03	1.00E-02	pCi/m3
7D1 Avila Gate(520288005) - AP	5-Sep-20	BETA	2.99E-02	2.33E-03	1.06E-02	pCi/m3
7D1 Avila Gate(520368005) - AP	12-Sep-20	BETA	3.20E-02	2.23E-03	1.23E-02	pCi/m3
7D1 Avila Gate(521272005) - AP	19-Sep-20	BETA	9.29E-03	2.95E-03	1.56E-02	pCi/m3
7D1 Avila Gate(521863005) - AP	26-Sep-20	BETA	1.24E-02	2.90E-03	1.69E-02	pCi/m3
7D1 Avila Gate(522576007) - AP	3-Oct-20	BETA	2.46E-02	3.30E-03	1.79E-02	pCi/m3
7D1 Avila Gate(524007007) - AP	10-Oct-20	BETA	2.62E-02	2.25E-03	1.11E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

7D1 Avila Gate(524009014) - AP	17-Oct-20	BETA	3.21E-02	2.17E-03	1.04E-02	pCi/m3
7D1 Avila Gate(524695005) - AP	24-Oct-20	BETA	3.75E-02	2.31E-03	1.22E-02	pCi/m3
7D1 Avila Gate(525830005) - AP	31-Oct-20	BETA	7.54E-02	2.47E-03	1.29E-02	pCi/m3
7D1 Avila Gate(526380014) - AP	7-Nov-20	BETA	2.94E-02	2.52E-03	1.19E-02	pCi/m3
7D1 Avila Gate(527613005) - AP	14-Nov-20	BETA	2.57E-02	2.01E-03	1.03E-02	pCi/m3
7D1 Avila Gate(527712005) - AP	21-Nov-20	BETA	3.06E-02	2.76E-03	1.29E-02	pCi/m3
7D1 Avila Gate(528790014) - AP	28-Nov-20	BETA	3.62E-02	1.80E-03	9.67E-03	pCi/m3
7D1 Avila Gate(528845007) - AP	5-Dec-20	BETA	7.80E-02	2.22E-03	1.21E-02	pCi/m3
7D1 Avila Gate(529341005) - AP	12-Dec-20	BETA	3.20E-02	2.18E-03	1.13E-02	pCi/m3
7D1 Avila Gate(530196007) - AP	19-Dec-20	BETA	2.55E-02	2.54E-03	1.38E-02	pCi/m3
7D1 Avila Gate(530951005) - AP	25-Dec-20	BETA	2.52E-02	2.21E-03	1.04E-02	pCi/m3
7D1 Avila Gate(509974006) - AP	14-Feb-20	Cesium-134	-6.43E-05	4.05E-04	2.71E-04	pCi/m3
7D1 Avila Gate(516372004) - AP	15-May-20	Cesium-134	-9.83E-05	5.30E-04	3.90E-04	pCi/m3
7D1 Avila Gate(525316004) - AP	15-Aug-20	Cesium-134	-2.09E-04	3.49E-04	2.74E-04	pCi/m3
7D1 Avila Gate(532027004) - AP	14-Nov-20	Cesium-134	7.94E-05	5.86E-04	3.38E-04	pCi/m3
7D1 Avila Gate(509974006) - AP	14-Feb-20	Cesium-137	-2.54E-05	4.68E-04	2.88E-04	pCi/m3
7D1 Avila Gate(516372004) - AP	15-May-20	Cesium-137	-4.31E-05	4.10E-04	2.50E-04	pCi/m3
7D1 Avila Gate(525316004) - AP	15-Aug-20	Cesium-137	6.70E-05	3.39E-04	2.14E-04	pCi/m3
7D1 Avila Gate(532027004) - AP	14-Nov-20	Cesium-137	2.63E-04	5.46E-04	2.86E-04	pCi/m3

7D3 Avila Pier - Market Fish

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7D3 Avila Pier(504740009) - FH Market	26-Feb-20	Cesium-134	3.49E+00	2.13E+01	1.63E+01	pCi/kg
7D3 Avila Pier(511002002) - FH Market	14-May-20	Cesium-134	-2.61E+00	4.12E+00	2.97E+00	pCi/kg
7D3 Avila Pier(517473001) - FH Market	30-Jul-20	Cesium-134	6.04E+00	1.94E+01	1.14E+01	pCi/kg
7D3 Avila Pier(523223006) - FH Market	27-Oct-20	Cesium-134	-6.00E+00	1.68E+01	1.13E+01	pCi/kg
7D3 Avila Pier(504740009) - FH Market	26-Feb-20	Cesium-137	1.56E+01	1.69E+01	1.32E+01	pCi/kg
7D3 Avila Pier(511002002) - FH Market	14-May-20	Cesium-137	1.47E+01	3.69E+00	5.08E+00	pCi/kg
7D3 Avila Pier(517473001) - FH Market	30-Jul-20	Cesium-137	-3.25E-01	1.77E+01	1.17E+01	pCi/kg
7D3 Avila Pier(523223006) - FH Market	27-Oct-20	Cesium-137	6.28E+00	1.73E+01	1.04E+01	pCi/kg
7D3 Avila Pier(504740009) - FH Market	26-Feb-20	Cobalt-58	-5.79E+00	1.68E+01	1.07E+01	pCi/kg
7D3 Avila Pier(511002002) - FH Market	14-May-20	Cobalt-58	-1.79E+00	3.83E+00	2.93E+00	pCi/kg
7D3 Avila Pier(517473001) - FH Market	30-Jul-20	Cobalt-58	2.19E+00	1.69E+01	9.87E+00	pCi/kg
7D3 Avila Pier(523223006) - FH Market	27-Oct-20	Cobalt-58	-2.75E+00	1.44E+01	9.34E+00	pCi/kg
7D3 Avila Pier(504740009) - FH Market	26-Feb-20	Cobalt-60	-1.36E+00	1.91E+01	1.20E+01	pCi/kg
7D3 Avila Pier(511002002) - FH Market	14-May-20	Cobalt-60	8.42E-01	4.88E+00	2.94E+00	pCi/kg
7D3 Avila Pier(517473001) - FH Market	30-Jul-20	Cobalt-60	1.24E+01	1.89E+01	1.72E+01	pCi/kg
7D3 Avila Pier(523223006) - FH Market	27-Oct-20	Cobalt-60	6.35E-01	1.81E+01	1.08E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

7D3 Avila Pier(504740009) - FH Market	26-Feb-20	Iron-59	1.32E+01	4.44E+01	2.60E+01	pCi/kg
7D3 Avila Pier(511002002) - FH Market	14-May-20	Iron-59	-2.85E+00	9.85E+00	6.43E+00	pCi/kg
7D3 Avila Pier(517473001) - FH Market	30-Jul-20	Iron-59	1.06E+01	3.67E+01	2.18E+01	pCi/kg
7D3 Avila Pier(523223006) - FH Market	27-Oct-20	Iron-59	2.02E+01	4.11E+01	2.44E+01	pCi/kg
7D3 Avila Pier(504740009) - FH Market	26-Feb-20	Manganese-54	-1.00E+01	1.69E+01	1.18E+01	pCi/kg
7D3 Avila Pier(511002002) - FH Market	14-May-20	Manganese-54	3.19E-01	3.89E+00	2.45E+00	pCi/kg
7D3 Avila Pier(517473001) - FH Market	30-Jul-20	Manganese-54	6.78E-01	1.65E+01	9.74E+00	pCi/kg
7D3 Avila Pier(523223006) - FH Market	27-Oct-20	Manganese-54	-2.94E+00	1.47E+01	8.84E+00	pCi/kg
7D3 Avila Pier(504740009) - FH Market	26-Feb-20	Zinc-65	1.09E+01	4.27E+01	2.81E+01	pCi/kg
7D3 Avila Pier(511002002) - FH Market	14-May-20	Zinc-65	8.92E+00	8.92E+00	9.75E+00	pCi/kg
7D3 Avila Pier(517473001) - FH Market	30-Jul-20	Zinc-65	1.04E+01	4.06E+01	2.42E+01	pCi/kg
7D3 Avila Pier(523223006) - FH Market	27-Oct-20	Zinc-65	-1.21E+00	3.87E+01	2.31E+01	pCi/kg

7E1 Avila Valley Barn - Vegetation

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7E1 Avila Valley Barn(505384002) - VG Brdleaf	5-Mar-20	Cesium-134	-3.85E+00	1.00E+01	8.74E+00	pCi/kg
7E1 Avila Valley Barn(509719001) - VG Brdleaf	20-Apr-20	Cesium-134	-6.74E-01	4.94E+00	3.09E+00	pCi/kg
7E1 Avila Valley Barn(516241002) - VG Brdleaf	28-Jul-20	Cesium-134	1.25E+00	4.11E+00	2.49E+00	pCi/kg
7E1 Avila Valley Barn(525938001) - VG Brdleaf	27-Oct-20	Cesium-134	1.39E+00	3.63E+00	2.11E+00	pCi/kg
7E1 Avila Valley Barn(505384002) - VG Brdleaf	5-Mar-20	Cesium-137	5.86E-01	8.36E+00	4.92E+00	pCi/kg
7E1 Avila Valley Barn(509719001) - VG Brdleaf	20-Apr-20	Cesium-137	-1.99E+00	3.77E+00	2.62E+00	pCi/kg
7E1 Avila Valley Barn(516241002) - VG Brdleaf	28-Jul-20	Cesium-137	1.01E+00	4.03E+00	2.43E+00	pCi/kg
7E1 Avila Valley Barn(525938001) - VG Brdleaf	27-Oct-20	Cesium-137	-1.17E+00	3.11E+00	1.95E+00	pCi/kg
7E1 Avila Valley Barn(505384002) - VG Brdleaf	5-Mar-20	Iodine-131	2.52E+00	1.11E+01	6.37E+00	pCi/kg
7E1 Avila Valley Barn(509719001) - VG Brdleaf	20-Apr-20	Iodine-131	1.12E+00	6.40E+00	3.68E+00	pCi/kg
7E1 Avila Valley Barn(516241002) - VG Brdleaf	28-Jul-20	Iodine-131	-1.53E-01	7.82E+00	4.63E+00	pCi/kg
7E1 Avila Valley Barn(525938001) - VG Brdleaf	27-Oct-20	Iodine-131	-3.73E+00	6.37E+00	4.46E+00	pCi/kg

7G1 Arroyo Grande - Vegetation

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
7G1 Arroyo Grande(500489003) - VG Brdleaf	13-Jan-20	Cesium-134	4.27E+00	1.55E+01	9.01E+00	pCi/kg
7G1 Arroyo Grande(502413002) - VG Brdleaf	4-Feb-20	Cesium-134	-3.37E+00	8.12E+00	6.56E+00	pCi/kg
7G1 Arroyo Grande(505216003) - VG Brdleaf	2-Mar-20	Cesium-134	-5.45E-01	8.23E+00	5.08E+00	pCi/kg
7G1 Arroyo Grande(508084003) - VG Brdleaf	6-Apr-20	Cesium-134	1.31E+00	1.31E+01	7.85E+00	pCi/kg
7G1 Arroyo Grande(510659002) - VG Brdleaf	4-May-20	Cesium-134	5.48E+00	8.52E+00	5.51E+00	pCi/kg
7G1 Arroyo Grande(512048003) - VG Brdleaf	1-Jun-20	Cesium-134	4.34E+00	9.78E+00	5.81E+00	pCi/kg
7G1 Arroyo Grande(514203003) - VG Brdleaf	6-Jul-20	Cesium-134	2.00E-01	8.48E+00	6.44E+00	pCi/kg
7G1 Arroyo Grande(517958004) - VG Brdleaf	11-Aug-20	Cesium-134	1.50E+00	4.53E+00	2.76E+00	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

7G1 Arroyo Grande(520363003) - VG Brdleaf	8-Sep-20	Cesium-134	2.96E+00	7.82E+00	4.71E+00	pCi/kg
7G1 Arroyo Grande(523232002) - VG Brdleaf	5-Oct-20	Cesium-134	6.84E+00	9.71E+00	1.11E+01	pCi/kg
7G1 Arroyo Grande(525832002) - VG Brdleaf	2-Nov-20	Cesium-134	-8.83E-01	7.61E+00	4.79E+00	pCi/kg
7G1 Arroyo Grande(528798003) - VG Brdleaf	1-Dec-20	Cesium-134	-3.69E+00	8.70E+00	5.99E+00	pCi/kg
7G1 Arroyo Grande(500489003) - VG Brdleaf	13-Jan-20	Cesium-137	8.23E+00	1.48E+01	9.24E+00	pCi/kg
7G1 Arroyo Grande(502413002) - VG Brdleaf	4-Feb-20	Cesium-137	2.31E+00	7.65E+00	4.54E+00	pCi/kg
7G1 Arroyo Grande(505216003) - VG Brdleaf	2-Mar-20	Cesium-137	-7.85E-01	7.77E+00	4.75E+00	pCi/kg
7G1 Arroyo Grande(508084003) - VG Brdleaf	6-Apr-20	Cesium-137	-1.51E-01	1.06E+01	6.38E+00	pCi/kg
7G1 Arroyo Grande(510659002) - VG Brdleaf	4-May-20	Cesium-137	-7.79E+00	9.75E+00	9.37E+00	pCi/kg
7G1 Arroyo Grande(512048003) - VG Brdleaf	1-Jun-20	Cesium-137	-4.20E+00	8.94E+00	8.38E+00	pCi/kg
7G1 Arroyo Grande(514203003) - VG Brdleaf	6-Jul-20	Cesium-137	2.01E+00	7.04E+00	4.57E+00	pCi/kg
7G1 Arroyo Grande(517958004) - VG Brdleaf	11-Aug-20	Cesium-137	1.16E+00	3.81E+00	2.29E+00	pCi/kg
7G1 Arroyo Grande(520363003) - VG Brdleaf	8-Sep-20	Cesium-137	-3.38E+00	9.00E+00	6.98E+00	pCi/kg
7G1 Arroyo Grande(523232002) - VG Brdleaf	5-Oct-20	Cesium-137	-1.84E+00	8.46E+00	5.14E+00	pCi/kg
7G1 Arroyo Grande(525832002) - VG Brdleaf	2-Nov-20	Cesium-137	3.65E+00	6.93E+00	4.23E+00	pCi/kg
7G1 Arroyo Grande(528798003) - VG Brdleaf	1-Dec-20	Cesium-137	8.19E+00	8.19E+00	1.47E+01	pCi/kg
7G1 Arroyo Grande(500489003) - VG Brdleaf	13-Jan-20	Iodine-131	-1.94E+00	1.46E+01	8.75E+00	pCi/kg
7G1 Arroyo Grande(502413002) - VG Brdleaf	4-Feb-20	Iodine-131	1.70E+00	1.21E+01	7.00E+00	pCi/kg
7G1 Arroyo Grande(505216003) - VG Brdleaf	2-Mar-20	Iodine-131	3.46E+00	9.43E+00	5.98E+00	pCi/kg
7G1 Arroyo Grande(508084003) - VG Brdleaf	6-Apr-20	Iodine-131	1.83E+00	1.37E+01	7.89E+00	pCi/kg
7G1 Arroyo Grande(510659002) - VG Brdleaf	4-May-20	Iodine-131	-3.40E+00	8.33E+00	5.26E+00	pCi/kg
7G1 Arroyo Grande(512048003) - VG Brdleaf	1-Jun-20	Iodine-131	-3.25E+00	1.01E+01	6.26E+00	pCi/kg
7G1 Arroyo Grande(514203003) - VG Brdleaf	6-Jul-20	Iodine-131	-1.20E+00	8.97E+00	5.31E+00	pCi/kg
7G1 Arroyo Grande(517958004) - VG Brdleaf	11-Aug-20	Iodine-131	4.79E-01	6.26E+00	3.67E+00	pCi/kg
7G1 Arroyo Grande(520363003) - VG Brdleaf	8-Sep-20	Iodine-131	1.15E+00	1.06E+01	6.11E+00	pCi/kg
7G1 Arroyo Grande(523232002) - VG Brdleaf	5-Oct-20	Iodine-131	3.12E+00	9.98E+00	5.98E+00	pCi/kg
7G1 Arroyo Grande(525832002) - VG Brdleaf	2-Nov-20	Iodine-131	-2.59E-01	7.93E+00	4.61E+00	pCi/kg
7G1 Arroyo Grande(528798003) - VG Brdleaf	1-Dec-20	Iodine-131	-2.31E+00	1.02E+01	6.16E+00	pCi/kg

8S1 Target Range - Air Cartridge

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
8S1 Target Range(500231012) - AC	4-Jan-20	Iodine-131	-9.51E-04	5.75E-03	3.88E-03	pCi/m3
8S1 Target Range(500490003) - AC	11-Jan-20	Iodine-131	-2.39E-03	7.80E-03	5.35E-03	pCi/m3
8S1 Target Range(501031008) - AC	18-Jan-20	Iodine-131	-2.70E-03	8.74E-03	5.95E-03	pCi/m3
8S1 Target Range(502000008) - AC	25-Jan-20	Iodine-131	3.63E-03	7.22E-03	5.16E-03	pCi/m3
8S1 Target Range(502411008) - AC	1-Feb-20	Iodine-131	2.45E-03	8.70E-03	4.82E-03	pCi/m3
8S1 Target Range(503155010) - AC	8-Feb-20	Iodine-131	-9.85E-04	9.28E-03	5.56E-03	pCi/m3
8S1 Target Range(503851008) - AC	15-Feb-20	Iodine-131	1.27E-03	7.41E-03	4.27E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

8S1 Target Range(504528008) - AC	22-Feb-20	Iodine-131	2.71E-03	8.26E-03	4.81E-03	pCi/m3
8S1 Target Range(505332003) - AC	29-Feb-20	Iodine-131	-3.72E-03	8.12E-03	5.86E-03	pCi/m3
8S1 Target Range(505759010) - AC	7-Mar-20	Iodine-131	-1.97E-03	6.84E-03	4.36E-03	pCi/m3
8S1 Target Range(506435010) - AC	14-Mar-20	Iodine-131	7.35E-03	8.68E-03	9.97E-03	pCi/m3
8S1 Target Range(507015008) - AC	21-Mar-20	Iodine-131	5.46E-03	1.02E-02	6.38E-03	pCi/m3
8S1 Target Range(507592003) - AC	27-Mar-20	Iodine-131	1.03E-03	1.11E-02	6.56E-03	pCi/m3
8S1 Target Range(508867008) - AC	4-Apr-20	Iodine-131	-1.76E-03	6.10E-03	3.98E-03	pCi/m3
8S1 Target Range(508984012) - AC	11-Apr-20	Iodine-131	-2.37E-03	1.14E-02	7.06E-03	pCi/m3
8S1 Target Range(509370012) - AC	18-Apr-20	Iodine-131	3.25E-03	7.84E-03	4.43E-03	pCi/m3
8S1 Target Range(509745011) - AC	25-Apr-20	Iodine-131	-1.34E-03	8.43E-03	5.44E-03	pCi/m3
8S1 Target Range(510179008) - AC	2-May-20	Iodine-131	2.53E-04	1.06E-02	6.09E-03	pCi/m3
8S1 Target Range(510640008) - AC	9-May-20	Iodine-131	1.43E-03	6.86E-03	3.73E-03	pCi/m3
8S1 Target Range(510747010) - AC	16-May-20	Iodine-131	7.24E-04	8.07E-03	4.54E-03	pCi/m3
8S1 Target Range(511437008) - AC	23-May-20	Iodine-131	-2.65E-03	6.80E-03	4.73E-03	pCi/m3
8S1 Target Range(512099008) - AC	30-May-20	Iodine-131	-2.33E-03	1.68E-02	9.96E-03	pCi/m3
8S1 Target Range(512380008) - AC	6-Jun-20	Iodine-131	-8.22E-04	6.50E-03	3.94E-03	pCi/m3
8S1 Target Range(513083010) - AC	13-Jun-20	Iodine-131	-4.56E-04	7.45E-03	4.72E-03	pCi/m3
8S1 Target Range(513584008) - AC	20-Jun-20	Iodine-131	-2.01E-03	1.12E-02	6.99E-03	pCi/m3
8S1 Target Range(514894015) - AC	27-Jun-20	Iodine-131	-1.27E-03	1.02E-02	6.21E-03	pCi/m3
8S1 Target Range(514398010) - AC	4-Jul-20	Iodine-131	5.39E-03	1.16E-02	6.36E-03	pCi/m3
8S1 Target Range(514716016) - AC	11-Jul-20	Iodine-131	-2.13E-03	8.66E-03	5.54E-03	pCi/m3
8S1 Target Range(515649012) - AC	18-Jul-20	Iodine-131	-8.73E-04	8.12E-03	4.95E-03	pCi/m3
8S1 Target Range(517082008) - AC	25-Jul-20	Iodine-131	-5.13E-03	6.62E-03	5.46E-03	pCi/m3
8S1 Target Range(516773008) - AC	1-Aug-20	Iodine-131	-2.98E-03	1.54E-02	9.38E-03	pCi/m3
8S1 Target Range(517339025) - AC	8-Aug-20	Iodine-131	3.40E-03	8.94E-03	4.97E-03	pCi/m3
8S1 Target Range(517997012) - AC	15-Aug-20	Iodine-131	4.61E-04	8.80E-03	5.01E-03	pCi/m3
8S1 Target Range(518816020) - AC	22-Aug-20	Iodine-131	-2.45E-03	6.96E-03	4.65E-03	pCi/m3
8S1 Target Range(518822020) - AC	29-Aug-20	Iodine-131	-2.13E-03	8.02E-03	5.21E-03	pCi/m3
8S1 Target Range(520288010) - AC	5-Sep-20	Iodine-131	-1.60E-03	8.62E-03	5.63E-03	pCi/m3
8S1 Target Range(520368008) - AC	12-Sep-20	Iodine-131	3.45E-03	1.43E-02	7.82E-03	pCi/m3
8S1 Target Range(521272008) - AC	19-Sep-20	Iodine-131	2.89E-03	1.15E-02	6.23E-03	pCi/m3
8S1 Target Range(521863008) - AC	26-Sep-20	Iodine-131	7.00E-03	1.49E-02	8.12E-03	pCi/m3
8S1 Target Range(522576012) - AC	3-Oct-20	Iodine-131	-3.42E-04	1.04E-02	6.10E-03	pCi/m3
8S1 Target Range(524007010) - AC	10-Oct-20	Iodine-131	-5.64E-04	1.06E-02	6.34E-03	pCi/m3
8S1 Target Range(524009003) - AC	17-Oct-20	Iodine-131	3.87E-03	1.67E-02	9.38E-03	pCi/m3
8S1 Target Range(524695008) - AC	24-Oct-20	Iodine-131	7.02E-03	7.89E-03	9.60E-03	pCi/m3
8S1 Target Range(525830010) - AC	31-Oct-20	Iodine-131	2.62E-04	7.34E-03	4.66E-03	pCi/m3
8S1 Target Range(526380003) - AC	7-Nov-20	Iodine-131	7.48E-04	9.64E-03	5.49E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

8S1 Target Range(527613010) - AC	14-Nov-20	Iodine-131	2.86E-04	8.12E-03	4.74E-03	pCi/m3
8S1 Target Range(527712010) - AC	21-Nov-20	Iodine-131	3.76E-03	1.25E-02	6.89E-03	pCi/m3
8S1 Target Range(528790003) - AC	28-Nov-20	Iodine-131	-2.13E-03	5.83E-03	3.92E-03	pCi/m3
8S1 Target Range(528845012) - AC	5-Dec-20	Iodine-131	-1.67E-03	1.04E-02	6.37E-03	pCi/m3
8S1 Target Range(529341010) - AC	12-Dec-20	Iodine-131	-3.17E-04	7.32E-03	4.80E-03	pCi/m3
8S1 Target Range(530196012) - AC	19-Dec-20	Iodine-131	4.33E-03	8.59E-03	5.12E-03	pCi/m3
8S1 Target Range(530951010) - AC	25-Dec-20	Iodine-131	-6.04E-04	1.05E-02	6.52E-03	pCi/m3

8S1 Target Range - Air Carbon-14

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
8S1 Target Range(500231014) - AC14	4-Jan-20	Carbon-14	2.97E-08	9.76E-08	5.87E-08	uCi/m3
8S1 Target Range(500490005) - AC14	11-Jan-20	Carbon-14	1.12E-07	1.17E-07	7.21E-08	uCi/m3
8S1 Target Range(501031010) - AC14	18-Jan-20	Carbon-14	5.14E-08	1.33E-07	8.02E-08	uCi/m3
8S1 Target Range(502000010) - AC14	25-Jan-20	Carbon-14	1.40E-07	1.33E-07	8.19E-08	uCi/m3
8S1 Target Range(502411010) - AC14	1-Feb-20	Carbon-14	6.11E-08	1.16E-07	7.02E-08	uCi/m3
8S1 Target Range(503155012) - AC14	8-Feb-20	Carbon-14	1.16E-07	1.41E-07	8.63E-08	uCi/m3
8S1 Target Range(503851010) - AC14	15-Feb-20	Carbon-14	1.21E-08	1.42E-07	8.45E-08	uCi/m3
8S1 Target Range(504528010) - AC14	22-Feb-20	Carbon-14	-4.29E-08	1.32E-07	7.76E-08	uCi/m3
8S1 Target Range(505332005) - AC14	29-Feb-20	Carbon-14	6.59E-08	1.28E-07	7.77E-08	uCi/m3
8S1 Target Range(505759012) - AC14	7-Mar-20	Carbon-14	1.16E-07	1.27E-07	7.79E-08	uCi/m3
8S1 Target Range(506435012) - AC14	14-Mar-20	Carbon-14	1.11E-07	1.20E-07	7.35E-08	uCi/m3
8S1 Target Range(507015010) - AC14	21-Mar-20	Carbon-14	1.33E-07	1.50E-07	9.17E-08	uCi/m3
8S1 Target Range(507592005) - AC14	27-Mar-20	Carbon-14	1.13E-07	1.17E-07	7.15E-08	uCi/m3
8S1 Target Range(508867010) - AC14	4-Apr-20	Carbon-14	9.84E-08	1.09E-07	6.68E-08	uCi/m3
8S1 Target Range(508984014) - AC14	11-Apr-20	Carbon-14	8.24E-08	1.57E-07	9.52E-08	uCi/m3
8S1 Target Range(509370014) - AC14	18-Apr-20	Carbon-14	6.83E-08	1.15E-07	6.96E-08	uCi/m3
8S1 Target Range(509745013) - AC14	25-Apr-20	Carbon-14	-1.14E-08	1.49E-07	8.88E-08	uCi/m3
8S1 Target Range(510179010) - AC14	2-May-20	Carbon-14	3.36E-08	1.29E-07	7.75E-08	uCi/m3
8S1 Target Range(510640010) - AC14	9-May-20	Carbon-14	8.34E-08	1.08E-07	6.60E-08	uCi/m3
8S1 Target Range(510747012) - AC14	16-May-20	Carbon-14	7.36E-08	1.24E-07	7.51E-08	uCi/m3
8S1 Target Range(511437010) - AC14	23-May-20	Carbon-14	1.42E-07	1.45E-07	8.89E-08	uCi/m3
8S1 Target Range(512099010) - AC14	30-May-20	Carbon-14	5.11E-08	1.29E-07	7.77E-08	uCi/m3
8S1 Target Range(512380010) - AC14	6-Jun-20	Carbon-14	9.26E-08	1.32E-07	8.01E-08	uCi/m3
8S1 Target Range(513083012) - AC14	13-Jun-20	Carbon-14	1.10E-07	1.47E-07	8.96E-08	uCi/m3
8S1 Target Range(513584010) - AC14	20-Jun-20	Carbon-14	1.01E-07	1.25E-07	7.64E-08	uCi/m3
8S1 Target Range(514894010) - AC14	27-Jun-20	Carbon-14	6.79E-08	1.58E-07	9.54E-08	uCi/m3
8S1 Target Range(514398012) - AC14	4-Jul-20	Carbon-14	9.26E-08	1.13E-07	6.87E-08	uCi/m3
8S1 Target Range(514716018) - AC14	11-Jul-20	Carbon-14	6.50E-08	1.75E-07	1.06E-07	uCi/m3

2020 DCPD REMP Analysis Results Appendix A

8S1 Target Range(515649014) - AC14	18-Jul-20	Carbon-14	-1.13E-07	1.90E-07	1.11E-07	uCi/m3
8S1 Target Range(517082010) - AC14	25-Jul-20	Carbon-14	9.13E-08	1.09E-07	6.66E-08	uCi/m3
8S1 Target Range(516773010) - AC14	1-Aug-20	Carbon-14	2.86E-07	1.41E-07	8.85E-08	uCi/m3
8S1 Target Range(517339029) - AC14	8-Aug-20	Carbon-14	1.57E-07	1.67E-07	1.02E-07	uCi/m3
8S1 Target Range(517997014) - AC14	15-Aug-20	Carbon-14	-1.04E-07	1.28E-07	7.46E-08	uCi/m3
8S1 Target Range(518816024) - AC14	22-Aug-20	Carbon-14	1.03E-07	1.30E-07	7.89E-08	uCi/m3
8S1 Target Range(518822022) - AC14	29-Aug-20	Carbon-14	-4.20E-08	1.24E-07	7.34E-08	uCi/m3
8S1 Target Range(520288012) - AC14	5-Sep-20	Carbon-14	2.65E-08	1.33E-07	7.99E-08	uCi/m3
8S1 Target Range(520368010) - AC14	12-Sep-20	Carbon-14	1.29E-07	1.46E-07	8.92E-08	uCi/m3
8S1 Target Range(521272010) - AC14	19-Sep-20	Carbon-14	-2.92E-08	1.31E-07	7.75E-08	uCi/m3
8S1 Target Range(521863010) - AC14	26-Sep-20	Carbon-14	3.73E-08	1.40E-07	8.39E-08	uCi/m3
8S1 Target Range(522576014) - AC14	3-Oct-20	Carbon-14	-4.86E-08	1.25E-07	7.36E-08	uCi/m3
8S1 Target Range(524007012) - AC14	10-Oct-20	Carbon-14	2.59E-07	1.24E-07	7.94E-08	uCi/m3
8S1 Target Range(524009005) - AC14	17-Oct-20	Carbon-14	2.73E-07	1.24E-07	7.95E-08	uCi/m3
8S1 Target Range(524695010) - AC14	24-Oct-20	Carbon-14	8.08E-08	1.28E-07	7.75E-08	uCi/m3
8S1 Target Range(525830012) - AC14	31-Oct-20	Carbon-14	9.64E-09	1.26E-07	7.54E-08	uCi/m3
8S1 Target Range(526380005) - AC14	7-Nov-20	Carbon-14	-2.15E-08	1.52E-07	9.01E-08	uCi/m3
8S1 Target Range(527613012) - AC14	14-Nov-20	Carbon-14	-4.07E-08	1.16E-07	6.85E-08	uCi/m3
8S1 Target Range(527712012) - AC14	21-Nov-20	Carbon-14	-1.16E-09	1.51E-07	8.98E-08	uCi/m3
8S1 Target Range(528790005) - AC14	28-Nov-20	Carbon-14	-3.06E-08	1.11E-07	6.57E-08	uCi/m3
8S1 Target Range(528845014) - AC14	5-Dec-20	Carbon-14	1.13E-07	1.32E-07	8.06E-08	uCi/m3
8S1 Target Range(529341012) - AC14	12-Dec-20	Carbon-14	-1.72E-09	1.38E-07	8.24E-08	uCi/m3
8S1 Target Range(530196014) - AC14	19-Dec-20	Carbon-14	5.13E-08	1.59E-07	9.57E-08	uCi/m3
8S1 Target Range(530951012) - AC14	25-Dec-20	Carbon-14	-1.95E-08	1.32E-07	7.83E-08	uCi/m3

8S1 Target Range - Air Particulate

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
8S1 Target Range(500231013) - AP	4-Jan-20	BETA	2.12E-02	1.73E-03	9.65E-03	pCi/m3
8S1 Target Range(500490004) - AP	11-Jan-20	BETA	4.35E-03	2.37E-03	1.14E-02	pCi/m3
8S1 Target Range(501031009) - AP	18-Jan-20	BETA	1.44E-02	2.37E-03	1.08E-02	pCi/m3
8S1 Target Range(502000009) - AP	25-Jan-20	BETA	1.31E-02	2.63E-03	1.43E-02	pCi/m3
8S1 Target Range(502411009) - AP	1-Feb-20	BETA	1.00E-02	2.17E-03	1.20E-02	pCi/m3
8S1 Target Range(503155011) - AP	8-Feb-20	BETA	1.97E-02	2.13E-03	1.01E-02	pCi/m3
8S1 Target Range(503851009) - AP	15-Feb-20	BETA	2.77E-02	2.20E-03	1.10E-02	pCi/m3
8S1 Target Range(504528009) - AP	22-Feb-20	BETA	3.93E-02	2.68E-03	1.14E-02	pCi/m3
8S1 Target Range(505332004) - AP	29-Feb-20	BETA	1.68E-02	2.17E-03	1.39E-02	pCi/m3
8S1 Target Range(505759011) - AP	7-Mar-20	BETA	1.18E-02	2.85E-03	1.18E-02	pCi/m3
8S1 Target Range(506435011) - AP	14-Mar-20	BETA	1.48E-02	2.31E-03	9.71E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

8S1 Target Range(507015009) - AP	21-Mar-20	BETA	1.44E-02	2.56E-03	1.12E-02	pCi/m3
8S1 Target Range(507592004) - AP	27-Mar-20	BETA	1.87E-02	2.56E-03	1.08E-02	pCi/m3
8S1 Target Range(508867009) - AP	4-Apr-20	BETA	8.15E-03	1.88E-03	8.69E-03	pCi/m3
8S1 Target Range(508984013) - AP	11-Apr-20	BETA	8.06E-03	2.93E-03	1.55E-02	pCi/m3
8S1 Target Range(509370013) - AP	18-Apr-20	BETA	1.68E-02	1.90E-03	9.96E-03	pCi/m3
8S1 Target Range(509745012) - AP	25-Apr-20	BETA	8.81E-03	2.50E-03	1.32E-02	pCi/m3
8S1 Target Range(510179009) - AP	2-May-20	BETA	1.58E-02	2.33E-03	1.16E-02	pCi/m3
8S1 Target Range(510640009) - AP	9-May-20	BETA	1.14E-02	1.93E-03	9.73E-03	pCi/m3
8S1 Target Range(510747011) - AP	16-May-20	BETA	9.08E-03	2.32E-03	1.15E-02	pCi/m3
8S1 Target Range(511437009) - AP	23-May-20	BETA	1.32E-02	2.47E-03	1.14E-02	pCi/m3
8S1 Target Range(512099009) - AP	30-May-20	BETA	7.00E-03	2.34E-03	1.07E-02	pCi/m3
8S1 Target Range(512380009) - AP	6-Jun-20	BETA	8.78E-03	2.27E-03	1.11E-02	pCi/m3
8S1 Target Range(513083011) - AP	13-Jun-20	BETA	9.67E-03	2.23E-03	1.09E-02	pCi/m3
8S1 Target Range(513584009) - AP	20-Jun-20	BETA	7.81E-03	2.09E-03	1.14E-02	pCi/m3
8S1 Target Range(514894005) - AP	27-Jun-20	BETA	2.73E-03	2.48E-03	1.25E-02	pCi/m3
8S1 Target Range(514398011) - AP	4-Jul-20	BETA	8.38E-03	2.19E-03	8.98E-03	pCi/m3
8S1 Target Range(514716017) - AP	11-Jul-20	BETA	1.34E-02	2.26E-03	1.01E-02	pCi/m3
8S1 Target Range(515649013) - AP	18-Jul-20	BETA	7.93E-03	2.59E-03	1.27E-02	pCi/m3
8S1 Target Range(517082009) - AP	25-Jul-20	BETA	1.11E-02	1.93E-03	9.42E-03	pCi/m3
8S1 Target Range(516773009) - AP	1-Aug-20	BETA	7.49E-03	2.05E-03	1.02E-02	pCi/m3
8S1 Target Range(517339026) - AP	8-Aug-20	BETA	1.17E-02	2.16E-03	1.17E-02	pCi/m3
8S1 Target Range(517997013) - AP	15-Aug-20	BETA	1.44E-02	2.51E-03	1.26E-02	pCi/m3
8S1 Target Range(518816021) - AP	22-Aug-20	BETA	7.42E-03	2.69E-03	1.36E-02	pCi/m3
8S1 Target Range(518822021) - AP	29-Aug-20	BETA	1.71E-02	2.56E-03	1.05E-02	pCi/m3
8S1 Target Range(520288011) - AP	5-Sep-20	BETA	2.57E-02	2.13E-03	1.05E-02	pCi/m3
8S1 Target Range(520368009) - AP	12-Sep-20	BETA	3.35E-02	3.76E-03	1.93E-02	pCi/m3
8S1 Target Range(521272009) - AP	19-Sep-20	BETA	8.20E-03	3.33E-03	1.60E-02	pCi/m3
8S1 Target Range(521863009) - AP	26-Sep-20	BETA	6.22E-03	3.34E-03	1.79E-02	pCi/m3
8S1 Target Range(522576013) - AP	3-Oct-20	BETA	2.46E-02	3.27E-03	1.79E-02	pCi/m3
8S1 Target Range(524007011) - AP	10-Oct-20	BETA	2.34E-02	2.39E-03	1.25E-02	pCi/m3
8S1 Target Range(524009004) - AP	17-Oct-20	BETA	2.66E-02	2.16E-03	1.03E-02	pCi/m3
8S1 Target Range(524695009) - AP	24-Oct-20	BETA	3.41E-02	1.91E-03	1.19E-02	pCi/m3
8S1 Target Range(525830011) - AP	31-Oct-20	BETA	7.38E-02	1.90E-03	1.25E-02	pCi/m3
8S1 Target Range(526380004) - AP	7-Nov-20	BETA	2.85E-02	2.31E-03	1.09E-02	pCi/m3
8S1 Target Range(527613011) - AP	14-Nov-20	BETA	2.23E-02	2.05E-03	1.04E-02	pCi/m3
8S1 Target Range(527712011) - AP	21-Nov-20	BETA	2.45E-02	2.84E-03	1.31E-02	pCi/m3
8S1 Target Range(528790004) - AP	28-Nov-20	BETA	3.45E-02	1.98E-03	9.87E-03	pCi/m3
8S1 Target Range(528845013) - AP	5-Dec-20	BETA	6.96E-02	2.35E-03	1.22E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

8S1 Target Range(529341011) - AP	12-Dec-20	BETA	2.60E-02	2.23E-03	1.11E-02	pCi/m3
8S1 Target Range(530196013) - AP	19-Dec-20	BETA	2.78E-02	2.55E-03	1.39E-02	pCi/m3
8S1 Target Range(530951011) - AP	25-Dec-20	BETA	2.57E-02	2.09E-03	1.05E-02	pCi/m3
8S1 Target Range(509974002) - AP	14-Feb-20	Cesium-134	4.30E-05	7.56E-04	4.40E-04	pCi/m3
8S1 Target Range(516372005) - AP	15-May-20	Cesium-134	5.57E-06	8.58E-04	5.17E-04	pCi/m3
8S1 Target Range(525316005) - AP	15-Aug-20	Cesium-134	3.61E-05	4.04E-04	2.37E-04	pCi/m3
8S1 Target Range(532027005) - AP	14-Nov-20	Cesium-134	1.79E-04	5.82E-04	3.05E-04	pCi/m3
8S1 Target Range(509974002) - AP	14-Feb-20	Cesium-137	-1.31E-04	5.79E-04	3.73E-04	pCi/m3
8S1 Target Range(516372005) - AP	15-May-20	Cesium-137	2.63E-04	1.13E-03	6.38E-04	pCi/m3
8S1 Target Range(525316005) - AP	15-Aug-20	Cesium-137	2.29E-04	3.18E-04	2.03E-04	pCi/m3
8S1 Target Range(532027005) - AP	14-Nov-20	Cesium-137	-8.09E-05	5.07E-04	3.18E-04	pCi/m3

8S2 SW Site Boundary - Air Cartridge

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
8S2 SW Site Boundary(500231010) - AC	4-Jan-20	Iodine-131	3.33E-03	7.75E-03	4.12E-03	pCi/m3
8S2 SW Site Boundary(500490011) - AC	11-Jan-20	Iodine-131	-4.71E-03	6.61E-03	5.89E-03	pCi/m3
8S2 SW Site Boundary(501031006) - AC	18-Jan-20	Iodine-131	-2.41E-03	7.52E-03	5.40E-03	pCi/m3
8S2 SW Site Boundary(502000006) - AC	25-Jan-20	Iodine-131	-5.20E-03	9.16E-03	6.35E-03	pCi/m3
8S2 SW Site Boundary(502411006) - AC	1-Feb-20	Iodine-131	1.45E-03	9.99E-03	5.78E-03	pCi/m3
8S2 SW Site Boundary(503155008) - AC	8-Feb-20	Iodine-131	1.90E-03	1.10E-02	6.96E-03	pCi/m3
8S2 SW Site Boundary(503851006) - AC	15-Feb-20	Iodine-131	1.72E-03	9.84E-03	5.52E-03	pCi/m3
8S2 SW Site Boundary(504528006) - AC	22-Feb-20	Iodine-131	-2.90E-03	7.22E-03	4.80E-03	pCi/m3
8S2 SW Site Boundary(505332011) - AC	29-Feb-20	Iodine-131	1.20E-03	7.51E-03	4.79E-03	pCi/m3
8S2 SW Site Boundary(505759008) - AC	7-Mar-20	Iodine-131	2.44E-03	7.95E-03	4.29E-03	pCi/m3
8S2 SW Site Boundary(506435006) - AC	14-Mar-20	Iodine-131	2.65E-04	7.40E-03	4.25E-03	pCi/m3
8S2 SW Site Boundary(507015006) - AC	21-Mar-20	Iodine-131	3.95E-03	9.72E-03	5.50E-03	pCi/m3
8S2 SW Site Boundary(507592011) - AC	27-Mar-20	Iodine-131	-6.56E-04	9.34E-03	5.75E-03	pCi/m3
8S2 SW Site Boundary(508867006) - AC	4-Apr-20	Iodine-131	1.31E-03	9.30E-03	5.27E-03	pCi/m3
8S2 SW Site Boundary(508984008) - AC	11-Apr-20	Iodine-131	1.70E-03	1.09E-02	6.01E-03	pCi/m3
8S2 SW Site Boundary(509370008) - AC	18-Apr-20	Iodine-131	9.41E-04	6.87E-03	4.15E-03	pCi/m3
8S2 SW Site Boundary(509745014) - AC	25-Apr-20	Iodine-131	-7.51E-04	7.92E-03	4.77E-03	pCi/m3
8S2 SW Site Boundary(510179006) - AC	2-May-20	Iodine-131	-2.61E-05	7.02E-03	4.19E-03	pCi/m3
8S2 SW Site Boundary(510640006) - AC	9-May-20	Iodine-131	-1.80E-03	6.95E-03	5.36E-03	pCi/m3
8S2 SW Site Boundary(510747006) - AC	16-May-20	Iodine-131	9.60E-04	7.48E-03	4.25E-03	pCi/m3
8S2 SW Site Boundary(511437006) - AC	23-May-20	Iodine-131	4.22E-03	1.05E-02	5.88E-03	pCi/m3
8S2 SW Site Boundary(512099006) - AC	30-May-20	Iodine-131	-5.20E-04	9.66E-03	5.68E-03	pCi/m3
8S2 SW Site Boundary(512380006) - AC	6-Jun-20	Iodine-131	-4.72E-03	6.06E-03	4.99E-03	pCi/m3
8S2 SW Site Boundary(513083008) - AC	13-Jun-20	Iodine-131	-1.72E-03	7.18E-03	4.56E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

8S2 SW Site Boundary(513584006) - AC	20-Jun-20	Iodine-131	7.02E-03	1.58E-02	9.79E-03	pCi/m3
8S2 SW Site Boundary(514894016) - AC	27-Jun-20	Iodine-131	-5.26E-03	1.19E-02	8.34E-03	pCi/m3
8S2 SW Site Boundary(514398006) - AC	4-Jul-20	Iodine-131	-1.65E-03	6.74E-03	4.32E-03	pCi/m3
8S2 SW Site Boundary(514716014) - AC	11-Jul-20	Iodine-131	-3.91E-04	1.29E-02	7.50E-03	pCi/m3
8S2 SW Site Boundary(515649008) - AC	18-Jul-20	Iodine-131	-5.45E-03	1.08E-02	8.02E-03	pCi/m3
8S2 SW Site Boundary(517082006) - AC	25-Jul-20	Iodine-131	-1.28E-03	9.69E-03	5.77E-03	pCi/m3
8S2 SW Site Boundary(516773006) - AC	1-Aug-20	Iodine-131	-2.00E-03	7.42E-03	4.72E-03	pCi/m3
8S2 SW Site Boundary(517339023) - AC	8-Aug-20	Iodine-131	2.08E-03	8.27E-03	4.59E-03	pCi/m3
8S2 SW Site Boundary(517997008) - AC	15-Aug-20	Iodine-131	-4.40E-03	8.32E-03	6.04E-03	pCi/m3
8S2 SW Site Boundary(518816018) - AC	22-Aug-20	Iodine-131	-3.91E-05	8.44E-03	4.88E-03	pCi/m3
8S2 SW Site Boundary(518822018) - AC	29-Aug-20	Iodine-131	-1.33E-03	6.93E-03	4.42E-03	pCi/m3
8S2 SW Site Boundary(520288008) - AC	5-Sep-20	Iodine-131	-1.77E-03	8.38E-03	5.33E-03	pCi/m3
8S2 SW Site Boundary(520368006) - AC	12-Sep-20	Iodine-131	7.84E-04	9.11E-03	5.15E-03	pCi/m3
8S2 SW Site Boundary(521272006) - AC	19-Sep-20	Iodine-131	1.42E-03	1.14E-02	6.37E-03	pCi/m3
8S2 SW Site Boundary(521863006) - AC	26-Sep-20	Iodine-131	-1.84E-04	1.07E-02	6.18E-03	pCi/m3
8S2 SW Site Boundary(522576008) - AC	3-Oct-20	Iodine-131	-7.15E-04	1.26E-02	7.47E-03	pCi/m3
8S2 SW Site Boundary(524007008) - AC	10-Oct-20	Iodine-131	-2.36E-03	1.08E-02	7.53E-03	pCi/m3
8S2 SW Site Boundary(524009011) - AC	17-Oct-20	Iodine-131	-3.46E-03	1.14E-02	7.36E-03	pCi/m3
8S2 SW Site Boundary(524695006) - AC	24-Oct-20	Iodine-131	-8.74E-04	8.36E-03	5.20E-03	pCi/m3
8S2 SW Site Boundary(525830006) - AC	31-Oct-20	Iodine-131	3.08E-03	1.06E-02	6.04E-03	pCi/m3
8S2 SW Site Boundary(526380011) - AC	7-Nov-20	Iodine-131	-1.33E-03	9.87E-03	6.11E-03	pCi/m3
8S2 SW Site Boundary(527613006) - AC	14-Nov-20	Iodine-131	3.55E-03	1.05E-02	5.83E-03	pCi/m3
8S2 SW Site Boundary(527712006) - AC	21-Nov-20	Iodine-131	2.18E-03	1.17E-02	6.52E-03	pCi/m3
8S2 SW Site Boundary(528790011) - AC	28-Nov-20	Iodine-131	1.23E-03	6.44E-03	3.55E-03	pCi/m3
8S2 SW Site Boundary(528845008) - AC	5-Dec-20	Iodine-131	-9.45E-03	8.97E-03	1.00E-02	pCi/m3
8S2 SW Site Boundary(529341006) - AC	12-Dec-20	Iodine-131	2.60E-03	8.56E-03	4.99E-03	pCi/m3
8S2 SW Site Boundary(530196008) - AC	19-Dec-20	Iodine-131	4.42E-05	9.32E-03	5.66E-03	pCi/m3
8S2 SW Site Boundary(530951006) - AC	25-Dec-20	Iodine-131	2.01E-04	1.04E-02	6.01E-03	pCi/m3

8S2 SW Site Boundary - Air Particulate

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
8S2 SW Site Boundary(500231011) - AP	4-Jan-20	BETA	1.96E-02	1.89E-03	9.72E-03	pCi/m3
8S2 SW Site Boundary(500490012) - AP	11-Jan-20	BETA	9.94E-03	2.59E-03	1.16E-02	pCi/m3
8S2 SW Site Boundary(501031007) - AP	18-Jan-20	BETA	1.50E-02	2.11E-03	1.06E-02	pCi/m3
8S2 SW Site Boundary(502000007) - AP	25-Jan-20	BETA	1.13E-02	2.39E-03	1.44E-02	pCi/m3
8S2 SW Site Boundary(502411007) - AP	1-Feb-20	BETA	1.52E-02	2.61E-03	1.21E-02	pCi/m3
8S2 SW Site Boundary(503155009) - AP	8-Feb-20	BETA	2.25E-02	2.64E-03	1.05E-02	pCi/m3
8S2 SW Site Boundary(503851007) - AP	15-Feb-20	BETA	2.92E-02	2.65E-03	1.14E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

8S2 SW Site Boundary(504528007) - AP	22-Feb-20	BETA	3.10E-02	2.22E-03	1.13E-02	pCi/m3
8S2 SW Site Boundary(505332012) - AP	29-Feb-20	BETA	2.10E-02	2.57E-03	1.44E-02	pCi/m3
8S2 SW Site Boundary(505759009) - AP	7-Mar-20	BETA	1.69E-02	2.63E-03	1.22E-02	pCi/m3
8S2 SW Site Boundary(506435007) - AP	14-Mar-20	BETA	1.62E-02	2.19E-03	9.69E-03	pCi/m3
8S2 SW Site Boundary(507015007) - AP	21-Mar-20	BETA	1.29E-02	2.43E-03	1.14E-02	pCi/m3
8S2 SW Site Boundary(507592012) - AP	27-Mar-20	BETA	2.55E-02	2.53E-03	1.09E-02	pCi/m3
8S2 SW Site Boundary(508867007) - AP	4-Apr-20	BETA	9.39E-03	2.13E-03	9.00E-03	pCi/m3
8S2 SW Site Boundary(508984009) - AP	11-Apr-20	BETA	7.41E-03	2.68E-03	1.54E-02	pCi/m3
8S2 SW Site Boundary(509370009) - AP	18-Apr-20	BETA	2.41E-02	2.18E-03	1.03E-02	pCi/m3
8S2 SW Site Boundary(509745015) - AP	25-Apr-20	BETA	6.60E-03	2.04E-03	1.31E-02	pCi/m3
8S2 SW Site Boundary(510179007) - AP	2-May-20	BETA	1.47E-02	2.25E-03	1.25E-02	pCi/m3
8S2 SW Site Boundary(510640007) - AP	9-May-20	BETA	1.19E-02	2.20E-03	1.17E-02	pCi/m3
8S2 SW Site Boundary(510747007) - AP	16-May-20	BETA	1.63E-02	2.67E-03	1.12E-02	pCi/m3
8S2 SW Site Boundary(511437007) - AP	23-May-20	BETA	1.23E-02	2.62E-03	1.16E-02	pCi/m3
8S2 SW Site Boundary(512099007) - AP	30-May-20	BETA	7.75E-03	1.99E-03	1.07E-02	pCi/m3
8S2 SW Site Boundary(512380007) - AP	6-Jun-20	BETA	1.30E-02	2.21E-03	1.08E-02	pCi/m3
8S2 SW Site Boundary(513083009) - AP	13-Jun-20	BETA	5.71E-03	2.27E-03	1.08E-02	pCi/m3
8S2 SW Site Boundary(513584007) - AP	20-Jun-20	BETA	3.76E-03	2.19E-03	1.13E-02	pCi/m3
8S2 SW Site Boundary(514894006) - AP	27-Jun-20	BETA	2.90E-03	2.45E-03	1.25E-02	pCi/m3
8S2 SW Site Boundary(514398007) - AP	4-Jul-20	BETA	8.32E-03	1.93E-03	8.53E-03	pCi/m3
8S2 SW Site Boundary(514716015) - AP	11-Jul-20	BETA	1.12E-02	2.27E-03	1.01E-02	pCi/m3
8S2 SW Site Boundary(515649009) - AP	18-Jul-20	BETA	8.51E-03	2.45E-03	1.28E-02	pCi/m3
8S2 SW Site Boundary(517082007) - AP	25-Jul-20	BETA	1.11E-02	1.89E-03	9.32E-03	pCi/m3
8S2 SW Site Boundary(516773007) - AP	1-Aug-20	BETA	5.63E-03	2.21E-03	1.01E-02	pCi/m3
8S2 SW Site Boundary(517339024) - AP	8-Aug-20	BETA	8.60E-03	2.23E-03	1.15E-02	pCi/m3
8S2 SW Site Boundary(517997009) - AP	15-Aug-20	BETA	9.83E-03	2.63E-03	1.20E-02	pCi/m3
8S2 SW Site Boundary(518816019) - AP	22-Aug-20	BETA	9.39E-03	2.77E-03	1.34E-02	pCi/m3
8S2 SW Site Boundary(518822019) - AP	29-Aug-20	BETA	1.39E-02	2.08E-03	9.99E-03	pCi/m3
8S2 SW Site Boundary(520288009) - AP	5-Sep-20	BETA	2.75E-02	2.23E-03	1.05E-02	pCi/m3
8S2 SW Site Boundary(520368007) - AP	12-Sep-20	BETA	1.91E-02	3.19E-03	1.46E-02	pCi/m3
8S2 SW Site Boundary(521272007) - AP	19-Sep-20	BETA	4.06E-03	2.73E-03	1.55E-02	pCi/m3
8S2 SW Site Boundary(521863007) - AP	26-Sep-20	BETA	7.02E-03	3.45E-03	1.68E-02	pCi/m3
8S2 SW Site Boundary(522576009) - AP	3-Oct-20	BETA	2.80E-02	3.09E-03	1.83E-02	pCi/m3
8S2 SW Site Boundary(524007009) - AP	10-Oct-20	BETA	1.77E-02	2.25E-03	1.09E-02	pCi/m3
8S2 SW Site Boundary(524009012) - AP	17-Oct-20	BETA	2.74E-02	2.27E-03	1.04E-02	pCi/m3
8S2 SW Site Boundary(524695007) - AP	24-Oct-20	BETA	3.40E-02	2.10E-03	1.20E-02	pCi/m3
8S2 SW Site Boundary(525830007) - AP	31-Oct-20	BETA	6.61E-02	2.29E-03	1.26E-02	pCi/m3
8S2 SW Site Boundary(526380012) - AP	7-Nov-20	BETA	2.55E-02	2.52E-03	1.18E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

8S2 SW Site Boundary(527613007) - AP	14-Nov-20	BETA	2.39E-02	1.89E-03	1.04E-02	pCi/m3
8S2 SW Site Boundary(527712007) - AP	21-Nov-20	BETA	3.39E-02	2.66E-03	1.30E-02	pCi/m3
8S2 SW Site Boundary(528790012) - AP	28-Nov-20	BETA	3.42E-02	1.96E-03	9.75E-03	pCi/m3
8S2 SW Site Boundary(528845009) - AP	5-Dec-20	BETA	6.61E-02	2.19E-03	1.18E-02	pCi/m3
8S2 SW Site Boundary(529341007) - AP	12-Dec-20	BETA	2.29E-02	2.15E-03	1.11E-02	pCi/m3
8S2 SW Site Boundary(530196009) - AP	19-Dec-20	BETA	2.66E-02	2.49E-03	1.39E-02	pCi/m3
8S2 SW Site Boundary(530951007) - AP	25-Dec-20	BETA	2.70E-02	2.23E-03	1.04E-02	pCi/m3
8S2 SW Site Boundary(509974005) - AP	14-Feb-20	Cesium-134	6.25E-05	4.98E-04	2.83E-04	pCi/m3
8S2 SW Site Boundary(516372006) - AP	15-May-20	Cesium-134	7.99E-05	4.60E-04	2.45E-04	pCi/m3
8S2 SW Site Boundary(525316006) - AP	15-Aug-20	Cesium-134	2.70E-04	4.02E-04	2.57E-04	pCi/m3
8S2 SW Site Boundary(532027006) - AP	14-Nov-20	Cesium-134	1.76E-04	3.94E-04	3.71E-04	pCi/m3
8S2 SW Site Boundary(509974005) - AP	14-Feb-20	Cesium-137	3.34E-04	3.34E-04	3.85E-04	pCi/m3
8S2 SW Site Boundary(516372006) - AP	15-May-20	Cesium-137	-1.53E-04	3.60E-04	2.74E-04	pCi/m3
8S2 SW Site Boundary(525316006) - AP	15-Aug-20	Cesium-137	-2.30E-05	2.67E-04	1.64E-04	pCi/m3
8S2 SW Site Boundary(532027006) - AP	14-Nov-20	Cesium-137	-1.95E-04	3.92E-04	2.79E-04	pCi/m3

8S3 DCSF96-1 - Groundwater

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
8S3 DCSF96-1(501846004) - GW	28-Jan-20	BETA	2.92E+00	2.05E+00	1.37E+00	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	BETA	6.72E+00	1.30E+00	1.47E+00	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	BETA	8.07E+00	2.04E+00	1.92E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	BETA	3.67E+00	1.55E+00	1.20E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Barium-140	-7.79E-01	7.23E+00	4.41E+00	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Barium-140	1.10E-01	6.58E+00	3.95E+00	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Barium-140	3.05E-01	8.96E+00	5.52E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Barium-140	8.83E-01	8.15E+00	4.78E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Cesium-134	7.37E-01	1.59E+00	9.27E-01	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Cesium-134	-6.54E-01	1.62E+00	1.69E+00	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Cesium-134	6.19E-01	1.79E+00	1.05E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Cesium-134	3.12E-01	1.85E+00	1.11E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Cesium-137	2.88E-01	1.51E+00	9.09E-01	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Cesium-137	-4.61E-01	1.43E+00	9.30E-01	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Cesium-137	-8.67E-02	1.61E+00	9.43E-01	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Cesium-137	5.57E-01	1.72E+00	1.02E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Cobalt-58	-5.05E-01	1.22E+00	7.83E-01	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Cobalt-58	3.28E-01	1.40E+00	7.97E-01	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Cobalt-58	-2.17E-03	1.53E+00	9.07E-01	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Cobalt-58	-3.86E-01	1.61E+00	1.08E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

8S3 DCSF96-1(501846004) - GW	28-Jan-20	Cobalt-60	-3.38E-01	1.45E+00	9.22E-01	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Cobalt-60	2.28E-02	1.57E+00	9.38E-01	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Cobalt-60	-4.47E-01	1.74E+00	1.07E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Cobalt-60	5.64E-01	1.98E+00	1.13E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Iodine-131	8.83E-01	2.67E+00	1.57E+00	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Iodine-131	-6.83E-01	2.23E+00	1.38E+00	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Iodine-131	-5.22E-01	3.29E+00	2.02E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Iodine-131	2.72E-01	2.97E+00	1.71E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Iron-55	2.71E+01	6.43E+01	4.88E+01	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Iron-55	1.29E+01	6.66E+01	4.73E+01	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Iron-55	-5.51E+00	4.18E+01	2.61E+01	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Iron-55	-2.22E+01	1.46E+02	9.29E+01	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Iron-59	-7.21E-01	2.77E+00	1.74E+00	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Iron-59	2.06E+00	2.99E+00	2.47E+00	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Iron-59	-3.25E-01	3.52E+00	2.17E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Iron-59	-8.81E-01	3.54E+00	2.17E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Lanthanum-140	-3.81E-01	2.29E+00	1.46E+00	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Lanthanum-140	-4.61E-01	2.14E+00	1.37E+00	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Lanthanum-140	-1.97E+00	3.00E+00	2.50E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Lanthanum-140	1.59E+00	3.10E+00	1.97E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Manganese-54	3.87E-02	1.45E+00	8.39E-01	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Manganese-54	-9.36E-02	1.32E+00	7.71E-01	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Manganese-54	4.01E-01	1.70E+00	9.97E-01	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Manganese-54	-4.54E-01	1.57E+00	1.15E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Nickel-63	1.18E+01	2.64E+01	1.64E+01	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Nickel-63	-1.95E+01	3.59E+01	2.05E+01	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Nickel-63	1.52E+01	2.89E+01	1.81E+01	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Nickel-63	-2.69E+00	3.51E+01	2.08E+01	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Niobium-95	6.88E-01	1.63E+00	1.01E+00	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Niobium-95	2.20E-01	1.34E+00	8.14E-01	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Niobium-95	8.71E-01	1.94E+00	1.16E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Niobium-95	2.05E-01	1.79E+00	1.07E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Total Strontium	-6.26E-01	7.17E-01	3.63E-01	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Total Strontium	4.26E-01	1.31E+00	8.47E-01	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Total Strontium	-1.38E+00	1.18E+00	5.43E-01	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Total Strontium	-4.66E-01	1.64E+00	9.25E-01	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Tritium	9.78E+01	2.63E+02	1.62E+02	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Tritium	9.88E+01	2.83E+02	1.75E+02	pCi/L

2020 DCPD REMP Analysis Results Appendix A

8S3 DCSF96-1(515652001) - GW	22-Jul-20	Tritium	-1.36E+02	3.16E+02	1.82E+02	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Tritium	-1.81E+02	2.82E+02	1.59E+02	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Zinc-65	-6.15E-01	2.77E+00	1.72E+00	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Zinc-65	-8.18E-01	2.66E+00	1.69E+00	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Zinc-65	4.78E-01	3.64E+00	2.17E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Zinc-65	6.31E-01	3.48E+00	2.22E+00	pCi/L
8S3 DCSF96-1(501846004) - GW	28-Jan-20	Zirconium-95	8.79E-01	2.69E+00	1.64E+00	pCi/L
8S3 DCSF96-1(510536004) - GW	5-May-20	Zirconium-95	-2.78E-01	2.34E+00	1.47E+00	pCi/L
8S3 DCSF96-1(515652001) - GW	22-Jul-20	Zirconium-95	2.59E-01	2.98E+00	1.74E+00	pCi/L
8S3 DCSF96-1(522579001) - GW	14-Oct-20	Zirconium-95	-3.67E-03	3.03E+00	1.84E+00	pCi/L

AVA Avila Beach Sand

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
AVA Avila Beach(506490006) - SD	18-Mar-20	Barium-140	5.93E+01	2.19E+02	1.22E+02	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Barium-140	9.51E+01	2.42E+02	1.29E+02	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Cesium-134	9.04E+00	4.79E+01	2.61E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Cesium-134	-4.12E+00	5.39E+01	3.15E+01	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Cesium-137	1.80E+01	4.98E+01	2.82E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Cesium-137	2.36E+01	6.76E+01	3.79E+01	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Cobalt-58	6.60E+00	4.03E+01	2.20E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Cobalt-58	2.73E+00	4.06E+01	2.25E+01	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Cobalt-60	-1.74E+01	4.27E+01	3.08E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Cobalt-60	1.76E+01	6.98E+01	4.25E+01	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Iron-55	6.15E+03	1.45E+04	1.08E+04	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Iron-55	-2.07E+03	1.47E+04	1.13E+04	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Iron-59	2.99E-01	9.12E+01	5.38E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Iron-59	1.70E+01	1.20E+02	6.72E+01	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Lanthanum-140	-5.92E+01	4.43E+01	5.20E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Lanthanum-140	1.17E+01	9.88E+01	5.45E+01	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Manganese-54	2.17E+01	4.42E+01	2.39E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Manganese-54	-8.71E+00	6.19E+01	3.70E+01	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Nickel-63	1.21E+03	2.59E+03	1.60E+03	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Nickel-63	-1.03E+02	2.25E+03	1.34E+03	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Niobium-95	-6.67E+00	4.34E+01	2.57E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Niobium-95	-6.43E+00	5.62E+01	3.31E+01	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Total Strontium	-1.70E+02	5.50E+02	3.05E+02	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Total Strontium	1.51E+02	8.19E+02	5.11E+02	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Zinc-65	-1.51E+01	1.05E+02	7.55E+01	pCi/kg

2020 DCPP REMP Analysis Results Appendix A

AVA Avila Beach(517337003) - SD	6-Aug-20	Zinc-65	6.83E+01	1.71E+02	1.03E+02	pCi/kg
AVA Avila Beach(506490006) - SD	18-Mar-20	Zirconium-95	1.68E+01	8.09E+01	4.39E+01	pCi/kg
AVA Avila Beach(517337003) - SD	6-Aug-20	Zirconium-95	3.23E+00	9.42E+01	5.65E+01	pCi/kg

BCM Blanchard Cow Meat

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
BCM Blanchard Cow Meat(504709002) - MT	27-Feb-20	Cesium-134	1.81E+00	3.38E+00	2.00E+00	pCi/kg
BCM Blanchard Cow Meat(510173004) - MT	30-Apr-20	Cesium-134	5.62E-01	4.44E+00	2.70E+00	pCi/kg
BCM Blanchard Cow Meat(515133001) - MT	16-Jul-20	Cesium-134	1.10E+00	5.97E+00	3.48E+00	pCi/kg
BCM Blanchard Cow Meat(524337001) - MT	22-Oct-20	Cesium-134	1.39E+00	3.85E+00	2.30E+00	pCi/kg
BCM Blanchard Cow Meat(525422001) - MT	26-Oct-20	Cesium-134	-2.43E-01	4.69E+00	2.76E+00	pCi/kg
BCM Blanchard Cow Meat(504709002) - MT	27-Feb-20	Cesium-137	2.04E-02	2.94E+00	1.80E+00	pCi/kg
BCM Blanchard Cow Meat(510173004) - MT	30-Apr-20	Cesium-137	1.42E+00	4.04E+00	2.42E+00	pCi/kg
BCM Blanchard Cow Meat(515133001) - MT	16-Jul-20	Cesium-137	1.21E+00	5.33E+00	3.45E+00	pCi/kg
BCM Blanchard Cow Meat(524337001) - MT	22-Oct-20	Cesium-137	1.43E-01	3.48E+00	2.06E+00	pCi/kg
BCM Blanchard Cow Meat(525422001) - MT	26-Oct-20	Cesium-137	1.21E+00	4.90E+00	2.80E+00	pCi/kg
BCM Blanchard Cow Meat(504709002) - MT	27-Feb-20	Cobalt-58	-8.48E-01	2.71E+00	1.81E+00	pCi/kg
BCM Blanchard Cow Meat(510173004) - MT	30-Apr-20	Cobalt-58	-1.05E-01	3.73E+00	2.32E+00	pCi/kg
BCM Blanchard Cow Meat(515133001) - MT	16-Jul-20	Cobalt-58	-5.95E-01	5.22E+00	3.15E+00	pCi/kg
BCM Blanchard Cow Meat(524337001) - MT	22-Oct-20	Cobalt-58	-1.04E+00	2.97E+00	1.95E+00	pCi/kg
BCM Blanchard Cow Meat(525422001) - MT	26-Oct-20	Cobalt-58	-3.44E+00	4.06E+00	3.58E+00	pCi/kg
BCM Blanchard Cow Meat(504709002) - MT	27-Feb-20	Cobalt-60	7.94E-01	3.45E+00	2.01E+00	pCi/kg
BCM Blanchard Cow Meat(510173004) - MT	30-Apr-20	Cobalt-60	6.90E-01	4.37E+00	2.56E+00	pCi/kg
BCM Blanchard Cow Meat(515133001) - MT	16-Jul-20	Cobalt-60	-6.23E-01	5.97E+00	3.54E+00	pCi/kg
BCM Blanchard Cow Meat(524337001) - MT	22-Oct-20	Cobalt-60	-4.65E-01	3.83E+00	2.35E+00	pCi/kg
BCM Blanchard Cow Meat(525422001) - MT	26-Oct-20	Cobalt-60	-9.91E-01	5.32E+00	3.38E+00	pCi/kg
BCM Blanchard Cow Meat(504709002) - MT	27-Feb-20	Iodine-131	-2.90E-01	4.03E+00	2.69E+00	pCi/kg
BCM Blanchard Cow Meat(510173004) - MT	30-Apr-20	Iodine-131	-1.10E+00	4.84E+00	2.92E+00	pCi/kg
BCM Blanchard Cow Meat(515133001) - MT	16-Jul-20	Iodine-131	-3.49E+00	7.92E+00	5.25E+00	pCi/kg
BCM Blanchard Cow Meat(524337001) - MT	22-Oct-20	Iodine-131	7.44E-02	4.80E+00	2.92E+00	pCi/kg
BCM Blanchard Cow Meat(525422001) - MT	26-Oct-20	Iodine-131	-1.04E+00	4.91E+00	3.03E+00	pCi/kg
BCM Blanchard Cow Meat(504709002) - MT	27-Feb-20	Total Strontium	1.62E+01	6.54E+01	4.05E+01	pCi/kg
BCM Blanchard Cow Meat(510173004) - MT	30-Apr-20	Total Strontium	1.60E+00	6.91E+01	4.14E+01	pCi/kg
BCM Blanchard Cow Meat(515133001) - MT	16-Jul-20	Total Strontium	1.73E+01	1.49E+02	8.99E+01	pCi/kg
BCM Blanchard Cow Meat(524337001) - MT	22-Oct-20	Total Strontium	-4.73E+01	6.89E+01	3.59E+01	pCi/kg
BCM Blanchard Cow Meat(525422001) - MT	26-Oct-20	Total Strontium	-4.75E+01	7.15E+01	3.65E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

CBA Cambria Moonstone Beach Sand

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Barium-140	3.08E+01	2.72E+02	1.49E+02	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Barium-140	-3.80E+01	1.30E+02	8.37E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Cesium-134	-3.36E+00	5.75E+01	3.49E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Cesium-134	-1.63E+01	2.46E+01	2.08E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Cesium-137	1.70E+01	5.53E+01	3.03E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Cesium-137	1.33E+01	4.41E+01	2.38E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Cobalt-58	-8.45E+00	2.85E+01	2.03E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Cobalt-58	3.70E+00	3.43E+01	2.02E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Cobalt-60	-1.24E+01	3.96E+01	2.79E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Cobalt-60	3.41E+00	4.07E+01	2.27E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Iron-55	6.87E+03	1.54E+04	1.15E+04	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Iron-55	1.40E+03	1.55E+04	1.19E+04	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Iron-59	1.30E+01	9.11E+01	4.93E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Iron-59	-7.05E+00	8.61E+01	5.03E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Lanthanum-140	-6.16E+01	9.69E+01	8.33E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Lanthanum-140	-1.79E+01	5.07E+01	3.74E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Manganese-54	-1.40E+01	3.87E+01	2.52E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Manganese-54	1.28E+01	4.08E+01	2.22E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Nickel-63	1.22E+03	2.66E+03	1.64E+03	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Nickel-63	-1.59E+03	2.21E+03	1.27E+03	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Niobium-95	-9.35E+00	4.59E+01	2.95E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Niobium-95	-4.77E+00	4.71E+01	2.78E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Total Strontium	-2.45E+02	4.14E+02	2.01E+02	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Total Strontium	3.01E+02	6.98E+02	4.74E+02	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Zinc-65	-2.36E+01	8.26E+01	6.37E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Zinc-65	3.60E+01	9.46E+01	5.32E+01	pCi/kg
CBA Cambria Moonstone Beach(506490005) - SD	18-Mar-20	Zirconium-95	1.48E+01	8.11E+01	4.49E+01	pCi/kg
CBA Cambria Moonstone Beach(517337010) - SD	6-Aug-20	Zirconium-95	-6.84E-01	6.90E+01	4.04E+01	pCi/kg

CCM Control Cow Meat

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
CCM Control Cow Meat(505071001) - MT	26-Feb-20	Cesium-134	1.51E-01	4.16E+00	2.41E+00	pCi/kg
CCM Control Cow Meat(509719002) - MT	20-Apr-20	Cesium-134	-1.06E+00	3.85E+00	2.50E+00	pCi/kg
CCM Control Cow Meat(516241001) - MT	28-Jul-20	Cesium-134	1.91E+00	5.07E+00	2.94E+00	pCi/kg
CCM Control Cow Meat(505071001) - MT	26-Feb-20	Cesium-137	2.58E+00	3.79E+00	2.45E+00	pCi/kg
CCM Control Cow Meat(509719002) - MT	20-Apr-20	Cesium-137	2.99E+00	2.99E+00	4.80E+00	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

CCM Control Cow Meat(516241001) - MT	28-Jul-20	Cesium-137	-9.20E-02	4.30E+00	2.64E+00	pCi/kg
CCM Control Cow Meat(505071001) - MT	26-Feb-20	Cobalt-58	-9.59E-01	3.70E+00	2.26E+00	pCi/kg
CCM Control Cow Meat(509719002) - MT	20-Apr-20	Cobalt-58	2.84E-01	3.45E+00	2.10E+00	pCi/kg
CCM Control Cow Meat(516241001) - MT	28-Jul-20	Cobalt-58	1.09E+00	4.70E+00	2.69E+00	pCi/kg
CCM Control Cow Meat(505071001) - MT	26-Feb-20	Cobalt-60	2.46E+00	4.55E+00	2.76E+00	pCi/kg
CCM Control Cow Meat(509719002) - MT	20-Apr-20	Cobalt-60	-2.51E-01	3.85E+00	2.33E+00	pCi/kg
CCM Control Cow Meat(516241001) - MT	28-Jul-20	Cobalt-60	-9.89E-01	4.16E+00	2.63E+00	pCi/kg
CCM Control Cow Meat(505071001) - MT	26-Feb-20	Iodine-131	1.73E+00	6.82E+00	4.05E+00	pCi/kg
CCM Control Cow Meat(509719002) - MT	20-Apr-20	Iodine-131	-2.25E+00	5.24E+00	3.32E+00	pCi/kg
CCM Control Cow Meat(516241001) - MT	28-Jul-20	Iodine-131	6.95E-01	9.23E+00	5.41E+00	pCi/kg
CCM Control Cow Meat(505071001) - MT	26-Feb-20	Total Strontium	3.55E+01	9.79E+01	6.14E+01	pCi/kg
CCM Control Cow Meat(509719002) - MT	20-Apr-20	Total Strontium	-8.42E+01	1.42E+02	7.68E+01	pCi/kg
CCM Control Cow Meat(516241001) - MT	28-Jul-20	Total Strontium	4.69E+01	1.55E+02	9.59E+01	pCi/kg

CYA Cayucos Beach Sand

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Barium-140	-3.50E-01	1.73E+02	1.04E+02	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Barium-140	1.23E+01	1.89E+02	1.10E+02	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Cesium-134	1.27E+01	3.80E+01	2.08E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Cesium-134	7.42E+00	4.37E+01	2.67E+01	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Cesium-137	1.15E+01	4.11E+01	2.25E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Cesium-137	3.41E+01	3.41E+01	2.29E+01	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Cobalt-58	2.07E+00	3.42E+01	1.96E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Cobalt-58	4.45E+00	3.75E+01	2.08E+01	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Cobalt-60	2.51E+00	3.88E+01	2.55E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Cobalt-60	-6.87E+00	2.87E+01	1.90E+01	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Iron-55	-3.07E+02	1.67E+04	1.22E+04	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Iron-55	5.04E+03	1.55E+04	1.20E+04	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Iron-59	-1.67E+01	6.59E+01	4.16E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Iron-59	3.88E+01	1.12E+02	6.18E+01	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Lanthanum-140	-1.08E+01	4.36E+01	3.02E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Lanthanum-140	5.44E+00	7.92E+01	4.52E+01	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Manganese-54	1.11E+01	3.70E+01	2.05E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Manganese-54	6.33E+00	4.04E+01	2.23E+01	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Nickel-63	6.47E+02	2.60E+03	1.57E+03	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Nickel-63	-1.65E+03	2.23E+03	1.28E+03	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Niobium-95	-4.39E+00	3.13E+01	2.18E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Niobium-95	-3.88E+00	4.72E+01	2.76E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

CYA Cayucos Beach(506490004) - SD	18-Mar-20	Total Strontium	9.93E+00	3.80E+02	2.28E+02	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Total Strontium	-2.16E+02	7.12E+02	3.84E+02	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Zinc-65	-1.04E+01	8.88E+01	5.26E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Zinc-65	-4.12E+01	9.25E+01	7.66E+01	pCi/kg
CYA Cayucos Beach(506490004) - SD	18-Mar-20	Zirconium-95	-2.54E+00	6.25E+01	3.66E+01	pCi/kg
CYA Cayucos Beach(517337005) - SD	6-Aug-20	Zirconium-95	2.94E+01	8.29E+01	4.47E+01	pCi/kg

DCM Diablo Cove Marine - Aquatic Vegetation Kelp

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
DCM Diablo Cove Marine(501627004) - AV Kelp	23-Jan-20	Cesium-134	-4.06E+00	9.63E+00	6.36E+00	pCi/kg
DCM Diablo Cove Marine(509770003) - AV Kelp	13-Apr-20	Cesium-134	1.42E+00	1.03E+01	6.36E+00	pCi/kg
DCM Diablo Cove Marine(514717001) - AV Kelp	14-Jul-20	Cesium-134	1.99E-01	1.65E+01	9.95E+00	pCi/kg
DCM Diablo Cove Marine(522578001) - AV Kelp	19-Oct-20	Cesium-134	-6.16E+00	8.81E+00	7.56E+00	pCi/kg
DCM Diablo Cove Marine(525420007) - AV Kelp	26-Oct-20	Cesium-134	-9.16E-01	9.04E+00	5.70E+00	pCi/kg
DCM Diablo Cove Marine(501627004) - AV Kelp	23-Jan-20	Cesium-137	-4.70E+00	9.01E+00	6.01E+00	pCi/kg
DCM Diablo Cove Marine(509770003) - AV Kelp	13-Apr-20	Cesium-137	-2.64E+00	8.12E+00	6.08E+00	pCi/kg
DCM Diablo Cove Marine(514717001) - AV Kelp	14-Jul-20	Cesium-137	8.92E+00	1.44E+01	8.68E+00	pCi/kg
DCM Diablo Cove Marine(522578001) - AV Kelp	19-Oct-20	Cesium-137	8.33E+00	8.33E+00	1.09E+01	pCi/kg
DCM Diablo Cove Marine(525420007) - AV Kelp	26-Oct-20	Cesium-137	-4.28E-01	8.94E+00	5.85E+00	pCi/kg
DCM Diablo Cove Marine(501627004) - AV Kelp	23-Jan-20	Cobalt-58	3.49E+00	1.04E+01	6.09E+00	pCi/kg
DCM Diablo Cove Marine(509770003) - AV Kelp	13-Apr-20	Cobalt-58	1.89E+00	1.10E+01	6.34E+00	pCi/kg
DCM Diablo Cove Marine(514717001) - AV Kelp	14-Jul-20	Cobalt-58	-8.66E+00	1.27E+01	9.57E+00	pCi/kg
DCM Diablo Cove Marine(522578001) - AV Kelp	19-Oct-20	Cobalt-58	5.81E-01	8.82E+00	5.40E+00	pCi/kg
DCM Diablo Cove Marine(525420007) - AV Kelp	26-Oct-20	Cobalt-58	-2.62E+00	9.11E+00	6.79E+00	pCi/kg
DCM Diablo Cove Marine(501627004) - AV Kelp	23-Jan-20	Cobalt-60	8.85E+00	1.37E+01	8.24E+00	pCi/kg
DCM Diablo Cove Marine(509770003) - AV Kelp	13-Apr-20	Cobalt-60	4.80E+00	1.13E+01	6.72E+00	pCi/kg
DCM Diablo Cove Marine(514717001) - AV Kelp	14-Jul-20	Cobalt-60	1.91E+01	2.35E+01	1.97E+01	pCi/kg
DCM Diablo Cove Marine(522578001) - AV Kelp	19-Oct-20	Cobalt-60	-2.47E-01	1.13E+01	6.72E+00	pCi/kg
DCM Diablo Cove Marine(525420007) - AV Kelp	26-Oct-20	Cobalt-60	8.29E+00	1.20E+01	7.37E+00	pCi/kg

DCM Diablo Cove Marine - Fish Perch

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
DCM Diablo Cove Marine(504740007) - FH Perch	20-Feb-20	Cesium-134	1.21E+00	1.87E+01	1.14E+01	pCi/kg
DCM Diablo Cove Marine(513081001) - FH Perch	10-Jun-20	Cesium-134	1.43E-01	1.93E+01	1.34E+01	pCi/kg
DCM Diablo Cove Marine(517473003) - FH Perch	28-Jul-20	Cesium-134	2.63E+01	2.63E+01	3.07E+01	pCi/kg
DCM Diablo Cove Marine(523223001) - FH Perch	19-Oct-20	Cesium-134	9.83E+00	2.20E+01	1.44E+01	pCi/kg
DCM Diablo Cove Marine(504740007) - FH Perch	20-Feb-20	Cesium-137	-8.17E-01	1.63E+01	9.98E+00	pCi/kg
DCM Diablo Cove Marine(513081001) - FH Perch	10-Jun-20	Cesium-137	-3.22E+00	2.00E+01	1.64E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(517473003) - FH Perch	28-Jul-20	Cesium-137	1.74E+01	2.42E+01	1.68E+01	pCi/kg
DCM Diablo Cove Marine(523223001) - FH Perch	19-Oct-20	Cesium-137	4.18E+00	2.32E+01	1.68E+01	pCi/kg
DCM Diablo Cove Marine(504740007) - FH Perch	20-Feb-20	Cobalt-58	-1.15E+00	1.74E+01	1.09E+01	pCi/kg
DCM Diablo Cove Marine(513081001) - FH Perch	10-Jun-20	Cobalt-58	-7.99E+00	1.78E+01	1.24E+01	pCi/kg
DCM Diablo Cove Marine(517473003) - FH Perch	28-Jul-20	Cobalt-58	-9.91E+00	2.05E+01	1.47E+01	pCi/kg
DCM Diablo Cove Marine(523223001) - FH Perch	19-Oct-20	Cobalt-58	7.49E+00	2.34E+01	1.39E+01	pCi/kg
DCM Diablo Cove Marine(504740007) - FH Perch	20-Feb-20	Cobalt-60	7.30E+00	1.99E+01	1.14E+01	pCi/kg
DCM Diablo Cove Marine(513081001) - FH Perch	10-Jun-20	Cobalt-60	9.81E+00	2.37E+01	1.42E+01	pCi/kg
DCM Diablo Cove Marine(517473003) - FH Perch	28-Jul-20	Cobalt-60	4.96E+00	2.44E+01	1.42E+01	pCi/kg
DCM Diablo Cove Marine(523223001) - FH Perch	19-Oct-20	Cobalt-60	-6.50E-01	2.27E+01	1.94E+01	pCi/kg
DCM Diablo Cove Marine(504740007) - FH Perch	20-Feb-20	Iron-59	1.74E+00	4.44E+01	2.58E+01	pCi/kg
DCM Diablo Cove Marine(513081001) - FH Perch	10-Jun-20	Iron-59	-2.66E+00	4.18E+01	2.50E+01	pCi/kg
DCM Diablo Cove Marine(517473003) - FH Perch	28-Jul-20	Iron-59	1.47E+01	5.31E+01	3.42E+01	pCi/kg
DCM Diablo Cove Marine(523223001) - FH Perch	19-Oct-20	Iron-59	-1.92E+01	4.02E+01	2.90E+01	pCi/kg
DCM Diablo Cove Marine(504740007) - FH Perch	20-Feb-20	Manganese-54	-3.97E+00	1.75E+01	1.14E+01	pCi/kg
DCM Diablo Cove Marine(513081001) - FH Perch	10-Jun-20	Manganese-54	-4.46E+00	1.88E+01	1.20E+01	pCi/kg
DCM Diablo Cove Marine(517473003) - FH Perch	28-Jul-20	Manganese-54	7.97E+00	2.19E+01	1.34E+01	pCi/kg
DCM Diablo Cove Marine(523223001) - FH Perch	19-Oct-20	Manganese-54	9.23E+00	2.26E+01	1.37E+01	pCi/kg
DCM Diablo Cove Marine(504740007) - FH Perch	20-Feb-20	Zinc-65	-2.32E+01	3.86E+01	3.10E+01	pCi/kg
DCM Diablo Cove Marine(513081001) - FH Perch	10-Jun-20	Zinc-65	-1.06E+01	4.23E+01	2.63E+01	pCi/kg
DCM Diablo Cove Marine(517473003) - FH Perch	28-Jul-20	Zinc-65	-4.29E+00	5.17E+01	3.54E+01	pCi/kg
DCM Diablo Cove Marine(523223001) - FH Perch	19-Oct-20	Zinc-65	9.10E+00	4.44E+01	2.67E+01	pCi/kg

DCM Diablo Cove Marine - Rockfish

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
DCM Diablo Cove Marine(504740003) - FH Rockfsh	20-Feb-20	Cesium-134	-1.40E+01	2.33E+01	2.17E+01	pCi/kg
DCM Diablo Cove Marine(513081008) - FH Rockfsh	10-Jun-20	Cesium-134	-3.71E+00	2.65E+01	1.71E+01	pCi/kg
DCM Diablo Cove Marine(517473004) - FH Rockfsh	28-Jul-20	Cesium-134	6.03E+00	2.44E+01	1.47E+01	pCi/kg
DCM Diablo Cove Marine(525676002) - FH Rockfsh	19-Oct-20	Cesium-134	3.39E+00	1.93E+01	1.17E+01	pCi/kg
DCM Diablo Cove Marine(504740003) - FH Rockfsh	20-Feb-20	Cesium-137	7.93E+00	2.20E+01	1.57E+01	pCi/kg
DCM Diablo Cove Marine(513081008) - FH Rockfsh	10-Jun-20	Cesium-137	-3.96E+00	2.57E+01	1.64E+01	pCi/kg
DCM Diablo Cove Marine(517473004) - FH Rockfsh	28-Jul-20	Cesium-137	5.23E+00	1.99E+01	2.32E+01	pCi/kg
DCM Diablo Cove Marine(525676002) - FH Rockfsh	19-Oct-20	Cesium-137	7.87E+00	1.65E+01	1.98E+01	pCi/kg
DCM Diablo Cove Marine(504740003) - FH Rockfsh	20-Feb-20	Cobalt-58	-1.07E+01	2.26E+01	1.59E+01	pCi/kg
DCM Diablo Cove Marine(513081008) - FH Rockfsh	10-Jun-20	Cobalt-58	-7.73E+00	2.43E+01	1.65E+01	pCi/kg
DCM Diablo Cove Marine(517473004) - FH Rockfsh	28-Jul-20	Cobalt-58	1.67E+00	2.18E+01	1.33E+01	pCi/kg
DCM Diablo Cove Marine(525676002) - FH Rockfsh	19-Oct-20	Cobalt-58	-3.30E+00	1.70E+01	1.10E+01	pCi/kg
DCM Diablo Cove Marine(504740003) - FH Rockfsh	20-Feb-20	Cobalt-60	-6.33E+00	2.95E+01	1.85E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(513081008) - FH Rockfsh	10-Jun-20	Cobalt-60	-8.16E+00	1.88E+01	1.54E+01	pCi/kg
DCM Diablo Cove Marine(517473004) - FH Rockfsh	28-Jul-20	Cobalt-60	9.24E+00	3.14E+01	1.86E+01	pCi/kg
DCM Diablo Cove Marine(525676002) - FH Rockfsh	19-Oct-20	Cobalt-60	3.16E+00	2.00E+01	1.16E+01	pCi/kg
DCM Diablo Cove Marine(504740003) - FH Rockfsh	20-Feb-20	Iron-59	5.34E-01	5.78E+01	3.36E+01	pCi/kg
DCM Diablo Cove Marine(513081008) - FH Rockfsh	10-Jun-20	Iron-59	-2.66E+01	4.79E+01	3.38E+01	pCi/kg
DCM Diablo Cove Marine(517473004) - FH Rockfsh	28-Jul-20	Iron-59	1.60E+01	4.75E+01	3.06E+01	pCi/kg
DCM Diablo Cove Marine(525676002) - FH Rockfsh	19-Oct-20	Iron-59	1.26E+01	4.80E+01	2.76E+01	pCi/kg
DCM Diablo Cove Marine(504740003) - FH Rockfsh	20-Feb-20	Manganese-54	5.09E+00	2.34E+01	1.38E+01	pCi/kg
DCM Diablo Cove Marine(513081008) - FH Rockfsh	10-Jun-20	Manganese-54	-1.00E+01	2.35E+01	1.65E+01	pCi/kg
DCM Diablo Cove Marine(517473004) - FH Rockfsh	28-Jul-20	Manganese-54	-1.04E+00	2.16E+01	1.34E+01	pCi/kg
DCM Diablo Cove Marine(525676002) - FH Rockfsh	19-Oct-20	Manganese-54	5.16E+00	1.93E+01	1.17E+01	pCi/kg
DCM Diablo Cove Marine(504740003) - FH Rockfsh	20-Feb-20	Zinc-65	2.60E+01	6.30E+01	3.78E+01	pCi/kg
DCM Diablo Cove Marine(513081008) - FH Rockfsh	10-Jun-20	Zinc-65	-1.13E-01	5.56E+01	3.33E+01	pCi/kg
DCM Diablo Cove Marine(517473004) - FH Rockfsh	28-Jul-20	Zinc-65	7.93E+00	5.94E+01	3.50E+01	pCi/kg
DCM Diablo Cove Marine(525676002) - FH Rockfsh	19-Oct-20	Zinc-65	8.62E+00	4.27E+01	2.76E+01	pCi/kg

DCM Diablo Cove Marine - Intertidal Mussel

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
DCM Diablo Cove Marine(500916004) - IM	21-Jan-20	Cesium-134	6.05E+00	2.12E+01	1.21E+01	pCi/kg
DCM Diablo Cove Marine(509741001) - IM	14-Apr-20	Cesium-134	-1.39E+00	1.73E+01	1.08E+01	pCi/kg
DCM Diablo Cove Marine(515653001) - IM	23-Jul-20	Cesium-134	4.96E+00	1.60E+01	9.54E+00	pCi/kg
DCM Diablo Cove Marine(523223007) - IM	27-Oct-20	Cesium-134	-1.05E+00	1.67E+01	1.03E+01	pCi/kg
DCM Diablo Cove Marine(500916004) - IM	21-Jan-20	Cesium-137	7.88E-01	1.86E+01	1.13E+01	pCi/kg
DCM Diablo Cove Marine(509741001) - IM	14-Apr-20	Cesium-137	5.47E+00	1.94E+01	1.16E+01	pCi/kg
DCM Diablo Cove Marine(515653001) - IM	23-Jul-20	Cesium-137	4.97E-01	1.51E+01	8.90E+00	pCi/kg
DCM Diablo Cove Marine(523223007) - IM	27-Oct-20	Cesium-137	-2.87E+00	1.50E+01	1.05E+01	pCi/kg
DCM Diablo Cove Marine(500916004) - IM	21-Jan-20	Cobalt-58	6.28E+00	1.98E+01	1.13E+01	pCi/kg
DCM Diablo Cove Marine(509741001) - IM	14-Apr-20	Cobalt-58	-3.52E+00	1.71E+01	1.10E+01	pCi/kg
DCM Diablo Cove Marine(515653001) - IM	23-Jul-20	Cobalt-58	-2.79E+00	1.47E+01	9.19E+00	pCi/kg
DCM Diablo Cove Marine(523223007) - IM	27-Oct-20	Cobalt-58	-9.53E-01	1.47E+01	9.10E+00	pCi/kg
DCM Diablo Cove Marine(500916004) - IM	21-Jan-20	Cobalt-60	1.33E+01	2.15E+01	1.39E+01	pCi/kg
DCM Diablo Cove Marine(509741001) - IM	14-Apr-20	Cobalt-60	-5.69E+00	1.61E+01	1.07E+01	pCi/kg
DCM Diablo Cove Marine(515653001) - IM	23-Jul-20	Cobalt-60	2.18E+00	1.64E+01	9.67E+00	pCi/kg
DCM Diablo Cove Marine(523223007) - IM	27-Oct-20	Cobalt-60	-3.95E+00	1.41E+01	9.11E+00	pCi/kg
DCM Diablo Cove Marine(500916004) - IM	21-Jan-20	Iron-59	1.19E+01	4.78E+01	2.79E+01	pCi/kg
DCM Diablo Cove Marine(509741001) - IM	14-Apr-20	Iron-59	-2.63E+00	3.75E+01	2.23E+01	pCi/kg
DCM Diablo Cove Marine(515653001) - IM	23-Jul-20	Iron-59	-7.94E+00	3.02E+01	1.88E+01	pCi/kg
DCM Diablo Cove Marine(523223007) - IM	27-Oct-20	Iron-59	1.85E+01	3.72E+01	2.16E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(500916004) - IM	21-Jan-20	Manganese-54	-4.10E+00	1.72E+01	1.06E+01	pCi/kg
DCM Diablo Cove Marine(509741001) - IM	14-Apr-20	Manganese-54	-6.07E+00	1.70E+01	1.15E+01	pCi/kg
DCM Diablo Cove Marine(515653001) - IM	23-Jul-20	Manganese-54	3.96E+00	1.50E+01	8.96E+00	pCi/kg
DCM Diablo Cove Marine(523223007) - IM	27-Oct-20	Manganese-54	-2.81E+00	1.59E+01	1.01E+01	pCi/kg
DCM Diablo Cove Marine(500916004) - IM	21-Jan-20	Zinc-65	6.45E+00	4.35E+01	2.56E+01	pCi/kg
DCM Diablo Cove Marine(509741001) - IM	14-Apr-20	Zinc-65	1.93E+00	3.33E+01	2.18E+01	pCi/kg
DCM Diablo Cove Marine(515653001) - IM	23-Jul-20	Zinc-65	-5.24E+00	3.01E+01	1.83E+01	pCi/kg
DCM Diablo Cove Marine(523223007) - IM	27-Oct-20	Zinc-65	1.74E+01	3.79E+01	2.20E+01	pCi/kg

DCM Diablo Cove Marine - Ocean Sediment

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Barium-140	-2.98E+01	4.76E+02	3.01E+02	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Cesium-134	-1.49E+01	8.48E+01	5.37E+01	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Cesium-137	4.09E+01	9.50E+01	5.78E+01	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Cobalt-58	-1.08E+01	7.26E+01	4.59E+01	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Cobalt-60	-1.40E+01	5.51E+01	3.84E+01	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Iron-55	3.54E+03	8.19E+03	6.16E+03	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Iron-59	-6.07E+01	1.66E+02	1.13E+02	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Lanthanum-140	-5.58E+01	1.13E+02	9.56E+01	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Manganese-54	2.73E+01	9.10E+01	5.13E+01	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Nickel-63	1.66E+03	1.81E+03	1.19E+03	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Niobium-95	7.60E+00	9.30E+01	5.46E+01	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Total Strontium	1.85E+02	4.88E+02	3.06E+02	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Zinc-65	3.19E+01	1.93E+02	1.74E+02	pCi/kg
DCM Diablo Cove Marine(505076001) - SD	20-Feb-20	Zirconium-95	-6.38E+00	1.34E+02	8.04E+01	pCi/kg

DCM Diablo Cove Marine - Seawater

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	BETA	4.28E+02	1.27E+02	1.13E+02	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	BETA	3.24E+02	1.57E+02	1.15E+02	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	BETA	2.96E+02	1.33E+02	1.01E+02	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	BETA	3.76E+02	1.37E+02	1.12E+02	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	BETA	2.81E+02	1.45E+02	1.06E+02	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	BETA	2.00E+02	8.27E+01	6.70E+01	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	BETA	4.24E+02	1.59E+02	1.26E+02	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	BETA	3.02E+02	1.29E+02	1.00E+02	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	BETA	2.84E+02	1.51E+02	1.08E+02	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	BETA	2.62E+02	1.40E+02	1.00E+02	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	BETA	3.47E+02	1.29E+02	1.04E+02	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	BETA	4.41E+02	1.12E+02	1.09E+02	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	BETA	3.98E+02	1.67E+02	1.28E+02	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	BETA	2.41E+02	1.19E+02	8.82E+01	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Barium-140	2.32E+00	1.00E+01	5.90E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Barium-140	-1.98E+00	7.43E+00	4.63E+00	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Barium-140	-2.42E+00	6.73E+00	6.20E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Barium-140	-1.59E+00	7.37E+00	4.57E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Barium-140	4.46E+00	9.14E+00	5.54E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Barium-140	-3.10E+00	7.66E+00	4.88E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Barium-140	-4.11E-01	7.17E+00	4.25E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Barium-140	1.70E-01	7.31E+00	4.52E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Barium-140	-1.30E+00	7.07E+00	4.28E+00	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Barium-140	1.34E+01	1.34E+01	1.85E+01	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Barium-140	2.76E+00	8.66E+00	9.04E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Barium-140	2.90E-01	8.79E+00	5.40E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Barium-140	-2.19E+00	5.61E+00	3.59E+00	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Barium-140	5.20E+00	8.24E+00	5.16E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Cesium-134	6.82E-01	2.03E+00	1.22E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Cesium-134	-1.21E+00	1.64E+00	1.73E+00	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Cesium-134	-5.75E-01	1.52E+00	1.55E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Cesium-134	7.23E-01	2.01E+00	1.23E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Cesium-134	-3.11E-01	1.83E+00	1.17E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Cesium-134	-6.02E-01	2.17E+00	1.38E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Cesium-134	2.07E-01	1.55E+00	9.26E-01	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Cesium-134	-9.59E-01	1.45E+00	1.60E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Cesium-134	1.35E-01	1.39E+00	8.30E-01	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Cesium-134	8.76E-01	2.25E+00	1.36E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Cesium-134	1.36E+00	1.36E+00	1.07E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Cesium-134	1.36E-01	1.83E+00	1.06E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Cesium-134	2.69E-01	1.42E+00	8.42E-01	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Cesium-134	4.71E-01	1.85E+00	1.18E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Cesium-137	1.77E+00	1.77E+00	1.54E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Cesium-137	-3.22E-01	1.44E+00	9.05E-01	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Cesium-137	5.87E-01	1.47E+00	8.75E-01	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Cesium-137	-9.98E-02	1.80E+00	1.10E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Cesium-137	4.70E-01	1.74E+00	1.04E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Cesium-137	-1.41E+00	1.87E+00	1.72E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Cesium-137	7.05E-02	1.31E+00	7.77E-01	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Cesium-137	4.47E-02	1.50E+00	8.97E-01	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Cesium-137	6.15E-01	1.42E+00	8.47E-01	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Cesium-137	-7.06E-01	2.25E+00	1.99E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Cesium-137	6.34E-02	1.53E+00	9.18E-01	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Cesium-137	-8.66E-02	1.83E+00	1.07E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Cesium-137	-3.44E-01	1.27E+00	7.97E-01	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Cesium-137	3.49E-01	1.64E+00	9.83E-01	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Cobalt-58	-2.11E-01	1.83E+00	1.14E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Cobalt-58	-2.24E-03	1.47E+00	8.98E-01	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Cobalt-58	5.85E-01	1.41E+00	8.49E-01	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Cobalt-58	2.38E-02	1.59E+00	9.80E-01	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Cobalt-58	4.38E-02	1.68E+00	1.04E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Cobalt-58	6.59E-01	1.96E+00	1.18E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Cobalt-58	-2.37E-02	1.38E+00	8.33E-01	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Cobalt-58	1.87E-01	1.29E+00	7.77E-01	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Cobalt-58	-2.63E-02	1.25E+00	8.48E-01	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Cobalt-58	1.90E-01	2.02E+00	1.22E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Cobalt-58	-5.42E-01	1.45E+00	9.67E-01	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Cobalt-58	9.09E-01	1.83E+00	1.06E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Cobalt-58	-2.27E-01	1.26E+00	7.85E-01	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Cobalt-58	-1.59E-01	1.58E+00	9.94E-01	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Cobalt-60	-8.02E-01	1.91E+00	1.50E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Cobalt-60	7.51E-01	1.88E+00	1.09E+00	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Cobalt-60	1.49E+00	1.62E+00	1.26E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Cobalt-60	-1.70E+00	1.77E+00	1.47E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Cobalt-60	3.98E-01	1.92E+00	1.27E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Cobalt-60	-1.40E+00	2.10E+00	1.76E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Cobalt-60	-1.61E+00	1.75E+00	1.71E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Cobalt-60	-6.77E-01	1.48E+00	1.55E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Cobalt-60	1.83E-01	1.42E+00	8.13E-01	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Cobalt-60	-8.45E-01	1.78E+00	1.80E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Cobalt-60	2.00E-01	1.61E+00	9.35E-01	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Cobalt-60	4.65E-01	1.94E+00	1.14E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Cobalt-60	-5.72E-02	1.33E+00	7.82E-01	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Cobalt-60	6.57E-01	1.79E+00	1.05E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Iodine-131	-3.68E-01	3.67E+00	2.40E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Iodine-131	1.41E+00	2.73E+00	1.65E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Iodine-131	-5.80E-01	2.54E+00	1.51E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Iodine-131	4.94E-01	2.55E+00	1.53E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Iodine-131	4.25E-03	3.08E+00	1.78E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Iodine-131	9.54E-01	2.52E+00	1.54E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Iodine-131	7.45E-02	2.62E+00	1.50E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Iodine-131	7.84E-01	2.70E+00	1.57E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Iodine-131	-4.62E-01	2.42E+00	1.43E+00	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Iodine-131	-5.05E-01	4.13E+00	2.42E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Iodine-131	7.11E-01	2.99E+00	1.73E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Iodine-131	6.74E-01	3.47E+00	2.10E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Iodine-131	-4.51E-01	1.94E+00	1.16E+00	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Iodine-131	3.28E-01	3.19E+00	1.85E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Iron-55	2.33E+01	8.40E+01	6.11E+01	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Iron-55	2.48E+01	8.72E+01	6.53E+01	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Iron-55	-3.92E+01	9.83E+01	6.93E+01	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Iron-55	-2.42E+01	6.94E+01	4.98E+01	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Iron-55	1.72E+01	1.44E+02	1.02E+02	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Iron-55	2.45E+01	4.01E+01	2.82E+01	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Iron-55	7.30E+00	5.08E+01	3.29E+01	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Iron-55	4.08E+00	8.34E+01	6.33E+01	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Iron-55	5.56E+01	9.71E+01	7.60E+01	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Iron-55	6.98E+01	8.70E+01	7.07E+01	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Iron-55	-1.07E+01	1.20E+02	7.55E+01	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Iron-55	-4.04E+01	1.13E+02	7.03E+01	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Iron-55	-3.38E+01	1.49E+02	9.21E+01	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Iron-55	1.62E+02	1.94E+02	1.29E+02	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Iron-59	3.42E+00	3.92E+00	2.84E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Iron-59	-3.35E-01	3.18E+00	1.88E+00	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Iron-59	1.57E+00	3.09E+00	1.91E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Iron-59	-1.82E+00	3.31E+00	2.28E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Iron-59	6.47E-01	4.15E+00	2.42E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Iron-59	3.10E-01	4.14E+00	2.41E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Iron-59	1.79E-02	2.88E+00	1.78E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Iron-59	-8.89E-01	2.89E+00	1.80E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Iron-59	8.11E-01	2.86E+00	1.73E+00	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Iron-59	1.79E+00	4.12E+00	2.63E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Iron-59	-9.39E-01	3.10E+00	1.94E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Iron-59	1.23E+00	3.81E+00	2.23E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Iron-59	1.18E-01	2.99E+00	1.84E+00	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Iron-59	2.15E+00	3.69E+00	2.25E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Lanthanum-140	-1.12E+00	2.44E+00	1.71E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Lanthanum-140	5.49E-01	2.78E+00	1.61E+00	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Lanthanum-140	-8.40E-01	2.05E+00	1.35E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Lanthanum-140	-7.18E-01	2.65E+00	1.74E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Lanthanum-140	4.22E-01	3.32E+00	1.99E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Lanthanum-140	-7.75E-01	2.44E+00	1.63E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Lanthanum-140	-3.02E-01	1.91E+00	1.18E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Lanthanum-140	-3.44E-01	2.35E+00	1.45E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Lanthanum-140	-2.74E-01	2.09E+00	1.46E+00	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Lanthanum-140	-6.90E-01	2.90E+00	1.85E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Lanthanum-140	-8.61E-01	2.75E+00	1.79E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Lanthanum-140	1.71E+00	2.82E+00	6.28E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Lanthanum-140	-4.69E-02	1.91E+00	1.14E+00	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Lanthanum-140	1.25E-01	2.93E+00	1.78E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Manganese-54	-5.66E-01	1.71E+00	1.12E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Manganese-54	-4.56E-01	1.53E+00	9.93E-01	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Manganese-54	-5.31E-01	1.22E+00	8.13E-01	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Manganese-54	-1.27E-01	1.63E+00	9.53E-01	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Manganese-54	-1.28E-01	1.64E+00	9.59E-01	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Manganese-54	-1.58E-01	1.83E+00	1.13E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Manganese-54	-9.87E-01	1.34E+00	1.11E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Manganese-54	-1.11E-01	1.38E+00	8.53E-01	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Manganese-54	9.98E-02	1.29E+00	7.71E-01	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Manganese-54	-2.80E-01	1.88E+00	1.18E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Manganese-54	4.52E-01	1.68E+00	1.02E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Manganese-54	-6.32E-01	1.64E+00	1.04E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Manganese-54	-1.07E-01	1.23E+00	7.59E-01	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Manganese-54	2.46E-01	1.52E+00	8.70E-01	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Nickel-63	2.84E+00	1.79E+01	1.08E+01	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Nickel-63	1.41E+01	2.59E+01	1.63E+01	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Nickel-63	-2.90E+00	2.22E+01	1.31E+01	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Nickel-63	7.93E+00	2.35E+01	1.44E+01	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Nickel-63	2.08E+00	3.29E+01	1.97E+01	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Nickel-63	-1.26E+00	3.27E+01	1.94E+01	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Nickel-63	-5.81E+00	3.32E+01	1.96E+01	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Nickel-63	3.93E+00	2.94E+01	1.77E+01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Nickel-63	1.44E+01	4.39E+01	2.68E+01	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Nickel-63	-2.19E+00	3.66E+01	2.17E+01	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Nickel-63	1.33E+01	3.76E+01	2.29E+01	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Nickel-63	-3.57E+00	3.60E+01	2.13E+01	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Nickel-63	1.58E+00	2.97E+01	1.78E+01	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Nickel-63	-2.99E+00	3.08E+01	1.82E+01	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Niobium-95	-1.24E-01	1.82E+00	1.12E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Niobium-95	5.97E-01	1.49E+00	8.94E-01	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Niobium-95	4.38E-01	1.41E+00	8.39E-01	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Niobium-95	-2.24E+00	1.68E+00	2.56E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Niobium-95	6.80E-01	1.85E+00	1.13E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Niobium-95	1.54E+00	2.06E+00	1.33E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Niobium-95	-2.57E-01	1.18E+00	7.39E-01	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Niobium-95	5.05E-01	1.52E+00	9.18E-01	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Niobium-95	-5.00E-02	1.34E+00	8.09E-01	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Niobium-95	5.28E-01	2.09E+00	1.26E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Niobium-95	-3.01E-01	1.51E+00	9.53E-01	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Niobium-95	1.07E+00	1.98E+00	1.19E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Niobium-95	4.65E-01	1.29E+00	1.66E+00	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Niobium-95	-8.48E-01	1.55E+00	1.09E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Total Strontium	-1.88E+00	2.41E+00	1.36E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Total Strontium	-4.03E-02	1.77E+00	1.06E+00	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Total Strontium	-5.47E-01	2.70E+00	1.58E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Total Strontium	2.19E+00	4.47E+00	2.78E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Total Strontium	1.12E+00	3.61E+00	2.21E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Total Strontium	-1.89E+00	2.87E+00	1.61E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Total Strontium	-3.33E+00	6.01E+00	2.88E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Total Strontium	-1.12E+00	3.74E+00	2.18E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Total Strontium	-1.20E+00	2.78E+00	1.60E+00	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Total Strontium	-9.29E-01	2.82E+00	1.65E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Total Strontium	1.68E+00	1.88E+00	1.25E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Total Strontium	-2.44E+00	6.98E+00	4.09E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Total Strontium	2.62E-01	2.39E+00	1.44E+00	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Total Strontium	-2.40E+00	3.34E+00	1.72E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Tritium	1.71E+01	2.59E+02	1.55E+02	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Tritium	-2.15E+02	3.06E+02	1.73E+02	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Tritium	6.23E+01	2.93E+02	1.78E+02	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Tritium	1.53E+01	2.38E+02	1.43E+02	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DCM Diablo Cove Marine(510649003) - SW	11-May-20	Tritium	8.35E+01	2.71E+02	1.66E+02	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Tritium	-6.49E+01	3.01E+02	1.76E+02	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Tritium	4.36E+01	2.91E+02	1.75E+02	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Tritium	4.34E+01	2.54E+02	1.54E+02	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Tritium	6.07E+01	2.62E+02	1.59E+02	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Tritium	-1.89E+02	3.25E+02	1.85E+02	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Tritium	-9.72E+01	2.67E+02	1.55E+02	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Tritium	1.19E+02	3.14E+02	1.96E+02	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Tritium	7.25E+01	2.55E+02	1.56E+02	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Tritium	2.52E+02	3.63E+02	2.37E+02	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Zinc-65	9.12E-01	4.11E+00	2.35E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Zinc-65	-3.40E+00	3.44E+00	3.52E+00	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Zinc-65	1.17E-01	2.95E+00	2.02E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Zinc-65	8.89E-01	3.72E+00	2.42E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Zinc-65	-9.02E-01	4.00E+00	2.47E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Zinc-65	-1.62E-01	4.49E+00	2.66E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Zinc-65	-2.39E+00	2.77E+00	2.23E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Zinc-65	5.41E-01	3.02E+00	1.79E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Zinc-65	1.14E+00	2.90E+00	1.83E+00	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Zinc-65	2.10E-01	3.89E+00	2.24E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Zinc-65	5.29E-01	3.33E+00	1.91E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Zinc-65	1.43E-01	3.70E+00	2.48E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Zinc-65	2.55E-01	2.90E+00	1.65E+00	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Zinc-65	3.74E-01	3.69E+00	3.24E+00	pCi/L
DCM Diablo Cove Marine(501627007) - SW	23-Jan-20	Zirconium-95	1.53E+00	3.26E+00	2.59E+00	pCi/L
DCM Diablo Cove Marine(503808003) - SW	18-Feb-20	Zirconium-95	-6.70E-01	2.58E+00	1.65E+00	pCi/L
DCM Diablo Cove Marine(505737003) - SW	3-Mar-20	Zirconium-95	1.66E+00	2.54E+00	1.59E+00	pCi/L
DCM Diablo Cove Marine(508947002) - SW	13-Apr-20	Zirconium-95	-1.67E+00	2.59E+00	1.91E+00	pCi/L
DCM Diablo Cove Marine(510649003) - SW	11-May-20	Zirconium-95	1.47E-01	3.24E+00	1.98E+00	pCi/L
DCM Diablo Cove Marine(513548003) - SW	22-Jun-20	Zirconium-95	1.36E+00	3.11E+00	2.07E+00	pCi/L
DCM Diablo Cove Marine(514719003) - SW	14-Jul-20	Zirconium-95	3.23E-01	2.42E+00	1.44E+00	pCi/L
DCM Diablo Cove Marine(517385003) - SW	10-Aug-20	Zirconium-95	6.73E-01	2.43E+00	1.45E+00	pCi/L
DCM Diablo Cove Marine(517385006) - SW	10-Aug-20	Zirconium-95	2.42E-02	2.27E+00	1.36E+00	pCi/L
DCM Diablo Cove Marine(519822002) - SW	1-Sep-20	Zirconium-95	-3.95E-01	3.61E+00	2.22E+00	pCi/L
DCM Diablo Cove Marine(524334003) - SW	19-Oct-20	Zirconium-95	1.68E-01	2.81E+00	1.70E+00	pCi/L
DCM Diablo Cove Marine(525420003) - SW	26-Oct-20	Zirconium-95	1.30E+00	3.02E+00	2.50E+00	pCi/L
DCM Diablo Cove Marine(526083003) - SW	5-Nov-20	Zirconium-95	1.92E+00	2.47E+00	1.60E+00	pCi/L
DCM Diablo Cove Marine(528799001) - SW	2-Dec-20	Zirconium-95	-3.78E-01	2.63E+00	1.66E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DW1 Drinking Water

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
DW1 Drinking Water(500502001) - DW	14-Jan-20	BETA	4.94E-01	1.23E+00	7.61E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	BETA	4.78E-01	1.14E+00	7.05E-01	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	BETA	2.38E+00	1.48E+00	1.03E+00	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	BETA	8.34E-03	1.73E+00	1.04E+00	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	BETA	1.04E+00	1.35E+00	8.55E-01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	BETA	-2.75E-01	1.68E+00	9.91E-01	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	BETA	4.83E-01	1.29E+00	7.89E-01	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	BETA	3.08E-01	9.89E-01	6.08E-01	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	BETA	-2.38E-01	1.44E+00	8.53E-01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	BETA	3.25E-01	1.08E+00	6.61E-01	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	BETA	-2.09E-01	2.05E+00	1.22E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	BETA	5.03E-01	9.69E-01	6.09E-01	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Barium-140	2.01E+00	6.54E+00	3.92E+00	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Barium-140	3.45E+00	6.64E+00	4.16E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Barium-140	3.24E-02	7.01E+00	4.21E+00	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Barium-140	-5.93E-01	5.86E+00	3.49E+00	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Barium-140	6.64E+00	6.64E+00	8.84E+00	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Barium-140	1.83E+00	9.23E+00	5.62E+00	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Barium-140	1.10E+00	7.41E+00	4.49E+00	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Barium-140	2.05E+00	8.62E+00	5.09E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Barium-140	4.20E+00	7.94E+00	4.87E+00	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Barium-140	-1.93E-01	1.06E+01	6.54E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Barium-140	2.88E+00	8.08E+00	4.80E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Barium-140	1.14E+00	8.94E+00	5.28E+00	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Cesium-134	7.33E-02	1.43E+00	9.27E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Cesium-134	-1.20E+00	1.97E+00	2.27E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Cesium-134	-8.64E-01	1.47E+00	9.95E-01	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Cesium-134	-6.87E-01	1.52E+00	1.56E+00	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Cesium-134	-9.73E-01	1.36E+00	1.65E+00	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Cesium-134	4.70E-01	1.83E+00	1.05E+00	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Cesium-134	8.80E-01	1.60E+00	1.07E+00	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Cesium-134	8.70E-02	1.73E+00	1.06E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Cesium-134	6.65E-01	1.67E+00	1.02E+00	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Cesium-134	-7.67E-03	1.80E+00	1.05E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Cesium-134	-8.29E-02	1.86E+00	1.16E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Cesium-134	8.15E-01	1.96E+00	1.18E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DW1 Drinking Water(500502001) - DW	14-Jan-20	Cesium-137	6.48E-01	1.50E+00	9.19E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Cesium-137	-7.11E-03	1.68E+00	9.80E-01	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Cesium-137	-4.82E-01	1.44E+00	9.42E-01	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Cesium-137	4.66E-01	1.52E+00	8.91E-01	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Cesium-137	5.60E-01	1.43E+00	8.69E-01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Cesium-137	-8.99E-03	1.69E+00	9.77E-01	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Cesium-137	-1.06E-01	1.44E+00	8.41E-01	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Cesium-137	2.96E-01	1.69E+00	1.01E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Cesium-137	9.45E-01	1.58E+00	9.88E-01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Cesium-137	-5.82E-01	1.61E+00	1.00E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Cesium-137	-4.28E-02	1.73E+00	1.05E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Cesium-137	7.20E-01	1.82E+00	1.09E+00	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Cobalt-58	-9.65E-01	1.30E+00	9.28E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Cobalt-58	3.32E-02	1.49E+00	8.80E-01	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Cobalt-58	-2.69E-01	1.31E+00	7.89E-01	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Cobalt-58	2.17E-01	1.42E+00	8.83E-01	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Cobalt-58	-5.03E-01	1.33E+00	8.36E-01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Cobalt-58	1.08E-02	1.73E+00	1.01E+00	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Cobalt-58	7.36E-02	1.46E+00	8.54E-01	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Cobalt-58	-2.01E-01	1.46E+00	9.27E-01	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Cobalt-58	2.80E-01	1.33E+00	8.02E-01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Cobalt-58	-3.74E-01	1.65E+00	1.01E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Cobalt-58	1.41E-01	1.76E+00	1.08E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Cobalt-58	-1.12E+00	1.53E+00	1.15E+00	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Cobalt-60	4.43E-02	1.55E+00	9.25E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Cobalt-60	2.11E-01	1.86E+00	1.06E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Cobalt-60	8.60E-01	1.58E+00	1.65E+00	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Cobalt-60	6.22E-02	1.56E+00	1.02E+00	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Cobalt-60	7.75E-01	1.68E+00	1.01E+00	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Cobalt-60	1.16E-01	1.73E+00	1.02E+00	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Cobalt-60	1.68E+00	1.68E+00	1.65E+00	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Cobalt-60	1.01E-01	2.00E+00	1.19E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Cobalt-60	-3.49E-02	1.59E+00	9.41E-01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Cobalt-60	2.05E-01	1.82E+00	1.07E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Cobalt-60	-2.13E-01	1.80E+00	1.11E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Cobalt-60	-1.21E-01	1.82E+00	1.14E+00	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Iodine-131	2.75E-01	7.70E-01	4.65E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Iodine-131	-1.39E-01	9.86E-01	5.93E-01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DW1 Drinking Water(505351002) - DW	4-Mar-20	Iodine-131	1.77E-01	4.90E-01	2.90E-01	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Iodine-131	-1.18E-01	6.70E-01	3.96E-01	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Iodine-131	3.41E-01	5.98E-01	3.62E-01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Iodine-131	-8.61E-02	6.11E-01	3.61E-01	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Iodine-131	1.06E-01	5.15E-01	3.45E-01	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Iodine-131	2.19E-01	6.65E-01	4.24E-01	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Iodine-131	1.41E-01	8.12E-01	4.66E-01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Iodine-131	-1.47E-01	6.66E-01	3.99E-01	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Iodine-131	-2.66E-02	5.92E-01	7.12E-01	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Iodine-131	-5.64E-02	9.69E-01	5.91E-01	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Iron-55	2.26E+01	6.51E+01	4.94E+01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Iron-55	-1.64E+01	9.51E+01	6.98E+01	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Iron-55	-1.06E+01	1.10E+02	7.87E+01	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Iron-55	8.47E+00	6.52E+01	4.76E+01	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Iron-55	4.86E+00	6.83E+01	4.60E+01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Iron-55	-8.56E+01	1.25E+02	7.67E+01	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Iron-55	7.01E+00	4.95E+01	3.21E+01	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Iron-55	-4.46E+01	1.12E+02	8.03E+01	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Iron-55	3.59E+01	8.08E+01	6.40E+01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Iron-55	-3.03E+01	1.09E+02	7.19E+01	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Iron-55	-5.23E+01	1.40E+02	8.56E+01	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Iron-55	2.85E+01	1.45E+02	9.19E+01	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Iron-59	-3.17E-01	2.76E+00	1.66E+00	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Iron-59	1.44E+00	3.12E+00	2.66E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Iron-59	-5.65E-01	2.79E+00	1.72E+00	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Iron-59	-6.38E-01	2.94E+00	1.91E+00	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Iron-59	2.23E-01	2.79E+00	1.63E+00	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Iron-59	-7.50E-01	3.21E+00	1.99E+00	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Iron-59	-9.70E-01	2.60E+00	1.71E+00	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Iron-59	-3.21E-01	3.34E+00	2.29E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Iron-59	-6.57E-03	2.88E+00	1.68E+00	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Iron-59	-2.04E+00	3.40E+00	2.38E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Iron-59	9.16E-01	3.81E+00	2.48E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Iron-59	7.36E-01	3.67E+00	2.20E+00	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Lanthanum-140	-1.55E+00	2.42E+00	2.16E+00	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Lanthanum-140	-7.02E-02	2.28E+00	1.35E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Lanthanum-140	1.04E+00	2.47E+00	1.46E+00	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Lanthanum-140	-1.27E+00	1.85E+00	1.39E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DW1 Drinking Water(509753002) - DW	6-May-20	Lanthanum-140	-5.40E-01	2.18E+00	1.63E+00	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Lanthanum-140	-5.44E-01	3.09E+00	1.94E+00	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Lanthanum-140	9.42E-01	2.50E+00	1.45E+00	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Lanthanum-140	-7.03E-01	2.94E+00	1.91E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Lanthanum-140	-2.28E+00	2.18E+00	4.68E+00	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Lanthanum-140	-2.29E+00	2.93E+00	2.29E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Lanthanum-140	3.34E-01	3.01E+00	1.80E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Lanthanum-140	2.46E-01	3.07E+00	1.76E+00	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Manganese-54	-4.60E-01	1.33E+00	8.24E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Manganese-54	-4.08E-01	1.55E+00	1.10E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Manganese-54	-2.27E-01	1.37E+00	8.14E-01	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Manganese-54	-2.44E-01	1.31E+00	8.20E-01	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Manganese-54	-1.31E-01	1.30E+00	7.60E-01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Manganese-54	-2.94E-01	1.62E+00	9.73E-01	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Manganese-54	-5.15E-01	1.36E+00	1.27E+00	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Manganese-54	-9.02E-02	1.54E+00	8.94E-01	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Manganese-54	-1.30E+00	1.32E+00	1.22E+00	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Manganese-54	-2.53E-02	1.58E+00	9.26E-01	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Manganese-54	-5.66E-01	1.64E+00	1.02E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Manganese-54	-1.80E-01	1.48E+00	9.15E-01	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Nickel-63	1.71E+01	2.94E+01	1.85E+01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Nickel-63	1.68E+01	3.74E+01	2.29E+01	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Nickel-63	1.79E+00	2.06E+01	1.23E+01	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Nickel-63	-1.79E+01	3.23E+01	1.85E+01	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Nickel-63	-1.03E+01	3.16E+01	1.84E+01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Nickel-63	1.19E+01	2.97E+01	1.83E+01	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Nickel-63	-6.30E+00	3.69E+01	2.17E+01	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Nickel-63	1.54E+01	3.92E+01	2.41E+01	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Nickel-63	1.68E+01	2.94E+01	1.83E+01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Nickel-63	9.89E+00	1.89E+01	1.18E+01	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Nickel-63	1.24E+01	4.20E+01	2.56E+01	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Nickel-63	6.73E+00	3.89E+01	2.35E+01	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Niobium-95	-1.48E-01	1.35E+00	8.49E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Niobium-95	-1.46E+00	1.60E+00	1.95E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Niobium-95	-1.50E+00	1.48E+00	3.73E+00	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Niobium-95	-8.93E-01	1.17E+00	8.89E-01	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Niobium-95	7.11E-02	1.46E+00	8.94E-01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Niobium-95	-1.51E+00	1.84E+00	2.10E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DW1 Drinking Water(514708001) - DW	7-Jul-20	Niobium-95	3.87E-01	1.48E+00	8.62E-01	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Niobium-95	1.54E+00	1.58E+00	1.32E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Niobium-95	2.47E-01	1.64E+00	9.89E-01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Niobium-95	7.90E-01	1.88E+00	1.10E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Niobium-95	3.94E-01	1.84E+00	1.12E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Niobium-95	1.66E+00	1.66E+00	1.71E+00	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Total Strontium	4.12E-01	8.14E-01	5.24E-01	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Total Strontium	4.92E-01	8.09E-01	5.43E-01	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Total Strontium	-2.81E-01	1.40E+00	8.06E-01	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Total Strontium	5.46E-01	1.60E+00	1.01E+00	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Total Strontium	-2.45E-01	8.84E-01	4.78E-01	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Total Strontium	2.23E-01	7.90E-01	4.92E-01	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Total Strontium	-5.59E-02	1.38E+00	8.18E-01	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Total Strontium	-8.68E-02	1.73E+00	1.02E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Total Strontium	3.37E-01	5.79E-01	3.94E-01	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Total Strontium	3.27E-01	1.40E+00	8.86E-01	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Total Strontium	-2.13E-01	1.03E+00	5.95E-01	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Total Strontium	7.53E-02	5.94E-01	3.64E-01	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Tritium	2.49E+01	2.76E+02	1.66E+02	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Tritium	-1.37E+01	3.10E+02	1.84E+02	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Tritium	7.33E+01	2.87E+02	1.76E+02	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Tritium	-3.07E+01	2.74E+02	1.62E+02	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Tritium	-5.74E+01	2.64E+02	1.54E+02	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Tritium	-1.48E-01	2.75E+02	1.64E+02	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Tritium	-5.93E+01	3.26E+02	1.91E+02	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Tritium	-5.11E+01	3.08E+02	1.81E+02	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Tritium	4.28E+01	3.18E+02	1.92E+02	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Tritium	8.29E+01	3.63E+02	2.22E+02	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Tritium	8.33E+01	2.26E+02	1.40E+02	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Tritium	3.35E+02	3.78E+02	2.55E+02	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Zinc-65	2.70E-01	2.78E+00	1.84E+00	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Zinc-65	1.66E-02	3.30E+00	2.00E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Zinc-65	-3.45E+00	2.76E+00	3.03E+00	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Zinc-65	-4.97E-01	2.98E+00	3.30E+00	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Zinc-65	-4.40E-01	2.54E+00	1.77E+00	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Zinc-65	-7.64E-01	3.40E+00	2.11E+00	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Zinc-65	-3.53E-01	2.88E+00	2.04E+00	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Zinc-65	-3.55E-01	3.55E+00	2.44E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

DW1 Drinking Water(520032003) - DW	2-Sep-20	Zinc-65	2.40E+00	3.23E+00	2.62E+00	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Zinc-65	-2.03E+00	3.18E+00	2.26E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Zinc-65	1.01E+00	3.73E+00	2.16E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Zinc-65	1.77E-01	3.12E+00	2.12E+00	pCi/L
DW1 Drinking Water(500502001) - DW	14-Jan-20	Zirconium-95	3.66E-03	2.41E+00	1.49E+00	pCi/L
DW1 Drinking Water(502412001) - DW	4-Feb-20	Zirconium-95	3.57E-01	2.68E+00	1.56E+00	pCi/L
DW1 Drinking Water(505351002) - DW	4-Mar-20	Zirconium-95	-6.30E-02	2.48E+00	1.54E+00	pCi/L
DW1 Drinking Water(508672001) - DW	7-Apr-20	Zirconium-95	2.95E-01	2.43E+00	1.44E+00	pCi/L
DW1 Drinking Water(509753002) - DW	6-May-20	Zirconium-95	3.49E-01	2.28E+00	1.39E+00	pCi/L
DW1 Drinking Water(512119001) - DW	2-Jun-20	Zirconium-95	1.81E+00	3.46E+00	2.07E+00	pCi/L
DW1 Drinking Water(514708001) - DW	7-Jul-20	Zirconium-95	3.57E-01	2.41E+00	1.58E+00	pCi/L
DW1 Drinking Water(516778001) - DW	4-Aug-20	Zirconium-95	1.37E+00	3.01E+00	1.84E+00	pCi/L
DW1 Drinking Water(520032003) - DW	2-Sep-20	Zirconium-95	4.76E-01	2.54E+00	1.70E+00	pCi/L
DW1 Drinking Water(522577001) - DW	6-Oct-20	Zirconium-95	-7.72E-02	3.07E+00	1.79E+00	pCi/L
DW1 Drinking Water(525831001) - DW	3-Nov-20	Zirconium-95	-3.43E-01	2.92E+00	1.83E+00	pCi/L
DW1 Drinking Water(528796001) - DW	2-Dec-20	Zirconium-95	-8.34E-01	2.76E+00	1.78E+00	pCi/L

DY1 Drywell 115 - Groundwater

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
DY1 Drywell 115(512990001) - GW	9-Jun-20	Barium-140	-3.21E+00	8.20E+00	5.16E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Cesium-134	8.02E-02	1.93E+00	1.14E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Cesium-137	1.99E-01	1.78E+00	1.04E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Cobalt-58	7.62E-02	1.72E+00	1.02E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Cobalt-60	4.72E-01	1.86E+00	1.20E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Iodine-131	-1.52E+00	3.24E+00	2.92E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Iron-59	2.98E-01	3.63E+00	2.19E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Lanthanum-140	-1.67E+00	2.69E+00	1.95E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Manganese-54	-4.72E-02	1.67E+00	9.99E-01	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Niobium-95	6.52E-01	1.90E+00	1.12E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Tritium	2.63E+03	2.75E+02	5.67E+02	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Zinc-65	-1.51E+00	3.55E+00	2.78E+00	pCi/L
DY1 Drywell 115(512990001) - GW	9-Jun-20	Zirconium-95	-4.07E-01	3.04E+00	1.84E+00	pCi/L

GW1 Groundwater Monitoring Well 1

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	BETA	2.09E+01	2.11E+01	1.36E+01	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	BETA	-1.24E+01	2.22E+01	1.29E+01	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	BETA	2.46E+01	2.57E+01	1.65E+01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	BETA	2.81E+01	2.30E+01	1.52E+01	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Barium-140	-8.87E-01	1.03E+01	6.21E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Barium-140	1.61E+00	1.14E+01	6.71E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Barium-140	-9.84E+00	1.56E+01	1.21E+01	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Barium-140	2.86E+00	1.11E+01	7.37E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Cesium-134	-1.30E+00	2.09E+00	1.69E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Cesium-134	8.38E-01	2.39E+00	2.68E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Cesium-134	5.56E-01	2.83E+00	1.67E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Cesium-134	1.71E+00	2.77E+00	1.79E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Cesium-137	-6.82E-01	2.25E+00	1.92E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Cesium-137	3.13E-01	2.27E+00	1.50E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Cesium-137	3.71E-01	2.35E+00	1.37E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Cesium-137	7.45E-01	2.38E+00	1.60E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Cobalt-58	-9.26E-01	2.13E+00	1.81E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Cobalt-58	6.48E-02	2.33E+00	1.59E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Cobalt-58	3.59E-01	2.30E+00	1.36E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Cobalt-58	-3.98E-02	2.17E+00	1.51E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Cobalt-60	-1.24E+00	2.13E+00	1.51E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Cobalt-60	-2.34E-01	2.42E+00	1.44E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Cobalt-60	-2.20E-01	2.37E+00	1.42E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Cobalt-60	8.67E-01	2.82E+00	1.67E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Iodine-131	-4.71E-01	3.78E+00	2.22E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Iodine-131	8.81E-02	4.31E+00	2.49E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Iodine-131	-3.52E+00	7.18E+00	5.05E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Iodine-131	1.47E+00	3.76E+00	2.23E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Iron-55	6.09E+01	8.07E+01	6.22E+01	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Iron-55	4.31E+01	6.31E+01	4.74E+01	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Iron-55	8.26E+00	4.71E+01	3.03E+01	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Iron-55	2.27E+00	1.44E+02	9.27E+01	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Iron-59	-1.09E+00	4.03E+00	2.51E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Iron-59	-4.09E-01	4.79E+00	2.81E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Iron-59	-1.98E-01	5.42E+00	3.15E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Iron-59	1.63E+00	5.00E+00	2.94E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Lanthanum-140	-6.15E-01	4.02E+00	2.91E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Lanthanum-140	-1.47E+00	3.86E+00	2.52E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Lanthanum-140	-1.45E+00	5.98E+00	3.83E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Lanthanum-140	-2.73E-01	3.83E+00	2.36E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Manganese-54	-1.17E+00	1.99E+00	1.33E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Manganese-54	5.92E-01	2.28E+00	1.53E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Manganese-54	4.96E-01	2.17E+00	1.28E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Manganese-54	-1.37E+00	2.35E+00	1.86E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Nickel-63	6.95E+00	2.66E+01	1.62E+01	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Nickel-63	-2.13E+01	3.36E+01	1.91E+01	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Nickel-63	1.07E+01	2.83E+01	1.74E+01	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Nickel-63	1.29E+01	3.17E+01	1.96E+01	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Niobium-95	8.27E-01	2.42E+00	1.69E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Niobium-95	6.38E-01	2.57E+00	2.31E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Niobium-95	1.64E+00	2.90E+00	1.92E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Niobium-95	2.69E+00	2.71E+00	1.96E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Total Strontium	-4.03E-01	7.41E-01	4.07E-01	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Total Strontium	7.54E-01	1.09E+00	7.60E-01	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Total Strontium	-4.32E-01	7.15E-01	3.65E-01	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Total Strontium	-4.27E-02	1.33E+00	7.89E-01	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Tritium	9.13E+01	2.53E+02	1.56E+02	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Tritium	1.60E+02	2.75E+02	1.76E+02	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Tritium	1.57E+02	3.11E+02	1.95E+02	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Tritium	3.74E+00	2.81E+02	1.68E+02	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Zinc-65	-5.09E-01	4.31E+00	2.96E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Zinc-65	3.71E+00	3.71E+00	3.83E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Zinc-65	-1.96E+00	3.72E+00	2.93E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Zinc-65	-1.65E+00	4.99E+00	4.96E+00	pCi/L
GW1 Groundwater Monitoring Well 1(501846002) - GW	28-Jan-20	Zirconium-95	3.27E-01	3.61E+00	2.20E+00	pCi/L
GW1 Groundwater Monitoring Well 1(510536001) - GW	5-May-20	Zirconium-95	-2.10E+00	3.78E+00	2.93E+00	pCi/L
GW1 Groundwater Monitoring Well 1(515652002) - GW	22-Jul-20	Zirconium-95	4.44E-01	4.96E+00	2.94E+00	pCi/L
GW1 Groundwater Monitoring Well 1(522579004) - GW	15-Oct-20	Zirconium-95	8.72E-01	3.99E+00	2.71E+00	pCi/L

GW2 Groundwater Monitoring Well 2

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	BETA	9.83E+00	7.30E+00	4.91E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	BETA	2.30E+01	6.63E+00	6.00E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	BETA	1.75E+01	9.44E+00	6.79E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	BETA	1.83E+01	6.65E+00	5.45E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Barium-140	4.71E+00	9.41E+00	5.70E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Barium-140	1.95E+00	7.82E+00	4.61E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Barium-140	3.73E+00	1.03E+01	8.51E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Barium-140	-1.51E+00	6.73E+00	4.12E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Cesium-134	2.30E-01	1.94E+00	1.17E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Cesium-134	2.64E-01	1.67E+00	1.00E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Cesium-134	4.69E-01	1.95E+00	1.12E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Cesium-134	5.98E-01	1.72E+00	1.56E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Cesium-137	-6.42E-01	1.79E+00	1.16E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Cesium-137	2.87E-01	1.52E+00	1.10E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Cesium-137	-4.40E-01	1.76E+00	1.21E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Cesium-137	6.81E-01	1.57E+00	1.04E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Cobalt-58	-1.18E+00	1.64E+00	1.24E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Cobalt-58	1.08E-01	1.55E+00	9.36E-01	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Cobalt-58	5.91E-01	1.81E+00	1.17E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Cobalt-58	-9.39E-01	1.30E+00	1.08E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Cobalt-60	-1.14E-01	2.07E+00	1.23E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Cobalt-60	4.72E-01	1.68E+00	9.66E-01	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Cobalt-60	9.01E-01	2.02E+00	1.20E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Cobalt-60	-7.72E-01	1.49E+00	1.01E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Iodine-131	-1.91E+00	3.47E+00	3.25E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Iodine-131	-4.92E-01	2.79E+00	1.85E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Iodine-131	2.30E-01	3.76E+00	2.28E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Iodine-131	-1.35E+00	2.35E+00	2.01E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Iron-55	2.89E+01	7.29E+01	5.46E+01	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Iron-55	3.51E+01	7.12E+01	5.20E+01	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Iron-55	1.99E+01	3.82E+01	2.61E+01	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Iron-55	-9.21E+00	1.21E+02	7.91E+01	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Iron-59	-1.40E+00	3.56E+00	2.29E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Iron-59	-6.87E-01	3.25E+00	1.96E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Iron-59	1.00E-01	3.52E+00	2.07E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Iron-59	8.82E-02	3.03E+00	1.76E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Lanthanum-140	-7.22E-01	2.91E+00	1.85E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Lanthanum-140	2.20E+00	2.87E+00	2.26E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Lanthanum-140	1.53E+00	3.55E+00	2.34E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Lanthanum-140	-3.21E-01	2.34E+00	1.44E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Manganese-54	4.37E-01	1.78E+00	1.19E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Manganese-54	8.95E-01	1.81E+00	1.11E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Manganese-54	2.95E-01	1.65E+00	9.54E-01	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Manganese-54	5.70E-01	1.44E+00	9.65E-01	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Nickel-63	1.32E+01	2.68E+01	1.67E+01	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Nickel-63	-1.51E+01	3.46E+01	1.99E+01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Nickel-63	9.12E+00	2.77E+01	1.70E+01	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Nickel-63	1.87E+01	3.28E+01	2.06E+01	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Niobium-95	4.32E-01	1.75E+00	1.16E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Niobium-95	1.55E+00	1.79E+00	1.48E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Niobium-95	2.06E-01	2.05E+00	1.71E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Niobium-95	-1.01E+00	1.68E+00	1.66E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Total Strontium	3.42E-01	8.99E-01	5.65E-01	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Total Strontium	-1.22E-01	1.11E+00	6.44E-01	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Total Strontium	-3.04E-01	1.53E+00	8.90E-01	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Total Strontium	-6.78E-01	1.72E+00	9.74E-01	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Tritium	-4.75E+01	2.61E+02	1.53E+02	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Tritium	9.11E+01	3.06E+02	1.88E+02	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Tritium	-4.41E+01	3.07E+02	1.81E+02	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Tritium	-1.95E+02	2.80E+02	1.57E+02	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Zinc-65	-7.19E-01	3.80E+00	3.42E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Zinc-65	6.21E-01	3.39E+00	2.17E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Zinc-65	-1.87E+00	3.56E+00	3.27E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Zinc-65	1.96E-01	3.24E+00	2.12E+00	pCi/L
GW2 Groundwater Monitoring Well 2(501846001) - GW	28-Jan-20	Zirconium-95	1.79E+00	3.39E+00	2.08E+00	pCi/L
GW2 Groundwater Monitoring Well 2(510536002) - GW	5-May-20	Zirconium-95	1.56E+00	2.64E+00	1.76E+00	pCi/L
GW2 Groundwater Monitoring Well 2(515652003) - GW	22-Jul-20	Zirconium-95	-1.52E+00	2.94E+00	1.94E+00	pCi/L
GW2 Groundwater Monitoring Well 2(522579005) - GW	15-Oct-20	Zirconium-95	-8.31E-01	2.35E+00	1.54E+00	pCi/L

MDO Montana de Oro - Beach Sand

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
MDO Montana de Oro(506490003) - SD	18-Mar-20	Barium-140	-1.04E+02	3.20E+02	2.37E+02	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Barium-140	2.04E+02	3.73E+02	2.28E+02	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Cesium-134	9.38E+00	7.70E+01	4.46E+01	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Cesium-134	3.33E+01	9.03E+01	5.20E+01	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Cesium-137	2.61E+01	7.44E+01	4.11E+01	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Cesium-137	1.96E+01	7.90E+01	4.50E+01	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Cobalt-58	-1.03E+01	6.22E+01	4.03E+01	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Cobalt-58	5.18E+00	6.20E+01	4.06E+01	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Cobalt-60	-2.39E+01	4.88E+01	3.92E+01	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Cobalt-60	1.79E+01	8.34E+01	4.84E+01	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Iron-55	5.25E+03	1.51E+04	1.13E+04	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Iron-55	1.56E+04	1.60E+04	1.28E+04	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Iron-59	5.40E+01	1.44E+02	7.55E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

MDO Montana de Oro(517337004) - SD	6-Aug-20	Iron-59	-7.83E+01	1.40E+02	1.03E+02	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Lanthanum-140	1.42E+01	1.26E+02	7.00E+01	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Lanthanum-140	-1.91E+01	1.39E+02	9.85E+01	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Manganese-54	7.15E+00	6.74E+01	4.11E+01	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Manganese-54	-1.06E+01	7.18E+01	4.39E+01	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Nickel-63	4.49E+02	2.29E+03	1.38E+03	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Nickel-63	-1.84E+03	2.67E+03	1.54E+03	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Niobium-95	1.86E+00	6.71E+01	3.99E+01	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Niobium-95	-1.56E+01	7.98E+01	5.36E+01	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Total Strontium	-1.50E+02	2.97E+02	1.43E+02	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Total Strontium	3.08E+02	8.44E+02	5.52E+02	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Zinc-65	-7.85E+01	1.37E+02	1.08E+02	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Zinc-65	2.92E+01	1.88E+02	1.25E+02	pCi/kg
MDO Montana de Oro(506490003) - SD	18-Mar-20	Zirconium-95	-4.73E+01	8.22E+01	7.60E+01	pCi/kg
MDO Montana de Oro(517337004) - SD	6-Aug-20	Zirconium-95	3.68E+01	1.31E+02	7.46E+01	pCi/kg

MT1 Meteorological Tower - Air Cartridge

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
MT1 Meteorological Tower(500231020) - AC	4-Jan-20	Iodine-131	-2.71E-04	7.24E-03	4.28E-03	pCi/m3
MT1 Meteorological Tower(500490001) - AC	11-Jan-20	Iodine-131	7.50E-04	1.00E-02	5.81E-03	pCi/m3
MT1 Meteorological Tower(501031016) - AC	18-Jan-20	Iodine-131	-1.48E-03	8.09E-03	5.07E-03	pCi/m3
MT1 Meteorological Tower(502000011) - AC	25-Jan-20	Iodine-131	2.52E-03	1.05E-02	6.15E-03	pCi/m3
MT1 Meteorological Tower(502411016) - AC	1-Feb-20	Iodine-131	-2.23E-04	7.64E-03	4.53E-03	pCi/m3
MT1 Meteorological Tower(503155020) - AC	8-Feb-20	Iodine-131	-3.31E-03	4.91E-03	3.95E-03	pCi/m3
MT1 Meteorological Tower(503851016) - AC	15-Feb-20	Iodine-131	1.86E-03	8.50E-03	4.68E-03	pCi/m3
MT1 Meteorological Tower(504528016) - AC	22-Feb-20	Iodine-131	2.12E-03	8.28E-03	4.64E-03	pCi/m3
MT1 Meteorological Tower(505332001) - AC	29-Feb-20	Iodine-131	-1.58E-04	8.37E-03	5.08E-03	pCi/m3
MT1 Meteorological Tower(505759018) - AC	7-Mar-20	Iodine-131	2.33E-03	7.97E-03	4.33E-03	pCi/m3
MT1 Meteorological Tower(506435008) - AC	14-Mar-20	Iodine-131	2.36E-03	9.68E-03	5.48E-03	pCi/m3
MT1 Meteorological Tower(507015016) - AC	21-Mar-20	Iodine-131	2.91E-03	1.19E-02	6.72E-03	pCi/m3
MT1 Meteorological Tower(507592001) - AC	27-Mar-20	Iodine-131	7.20E-04	7.60E-03	4.35E-03	pCi/m3
MT1 Meteorological Tower(508867016) - AC	4-Apr-20	Iodine-131	1.73E-03	6.47E-03	3.80E-03	pCi/m3
MT1 Meteorological Tower(508984010) - AC	11-Apr-20	Iodine-131	-2.64E-03	8.90E-03	5.77E-03	pCi/m3
MT1 Meteorological Tower(509370010) - AC	18-Apr-20	Iodine-131	1.12E-03	9.41E-03	5.30E-03	pCi/m3
MT1 Meteorological Tower(509745016) - AC	25-Apr-20	Iodine-131	-1.99E-03	8.80E-03	5.47E-03	pCi/m3
MT1 Meteorological Tower(510179016) - AC	2-May-20	Iodine-131	3.00E-04	7.94E-03	4.53E-03	pCi/m3
MT1 Meteorological Tower(510640016) - AC	9-May-20	Iodine-131	1.41E-03	7.82E-03	4.32E-03	pCi/m3
MT1 Meteorological Tower(510747008) - AC	16-May-20	Iodine-131	3.01E-03	7.88E-03	4.39E-03	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

MT1 Meteorological Tower(511437016) - AC	23-May-20	Iodine-131	5.73E-03	1.31E-02	8.14E-03	pCi/m3
MT1 Meteorological Tower(512099016) - AC	30-May-20	Iodine-131	4.69E-03	1.18E-02	6.67E-03	pCi/m3
MT1 Meteorological Tower(512380016) - AC	6-Jun-20	Iodine-131	4.33E-04	7.25E-03	4.13E-03	pCi/m3
MT1 Meteorological Tower(513083013) - AC	13-Jun-20	Iodine-131	2.79E-03	9.11E-03	5.02E-03	pCi/m3
MT1 Meteorological Tower(513584016) - AC	20-Jun-20	Iodine-131	-3.01E-03	1.44E-02	8.74E-03	pCi/m3
MT1 Meteorological Tower(514894017) - AC	27-Jun-20	Iodine-131	-6.65E-04	9.62E-03	5.69E-03	pCi/m3
MT1 Meteorological Tower(514398008) - AC	4-Jul-20	Iodine-131	-1.12E-03	9.01E-03	5.42E-03	pCi/m3
MT1 Meteorological Tower(514716024) - AC	11-Jul-20	Iodine-131	1.30E-03	8.64E-03	4.78E-03	pCi/m3
MT1 Meteorological Tower(515649010) - AC	18-Jul-20	Iodine-131	-2.00E-03	7.42E-03	4.86E-03	pCi/m3
MT1 Meteorological Tower(517082016) - AC	25-Jul-20	Iodine-131	-1.06E-03	7.25E-03	4.37E-03	pCi/m3
MT1 Meteorological Tower(516773016) - AC	1-Aug-20	Iodine-131	5.96E-03	8.56E-03	8.31E-03	pCi/m3
MT1 Meteorological Tower(517339041) - AC	8-Aug-20	Iodine-131	-1.32E-03	7.43E-03	4.59E-03	pCi/m3
MT1 Meteorological Tower(517997022) - AC	15-Aug-20	Iodine-131	-2.16E-03	9.37E-03	5.96E-03	pCi/m3
MT1 Meteorological Tower(518816030) - AC	22-Aug-20	Iodine-131	9.22E-05	9.13E-03	5.37E-03	pCi/m3
MT1 Meteorological Tower(518822028) - AC	29-Aug-20	Iodine-131	-1.91E-03	8.45E-03	5.40E-03	pCi/m3
MT1 Meteorological Tower(520288018) - AC	5-Sep-20	Iodine-131	2.93E-06	9.50E-03	5.75E-03	pCi/m3
MT1 Meteorological Tower(520368016) - AC	12-Sep-20	Iodine-131	3.06E-03	1.21E-02	6.81E-03	pCi/m3
MT1 Meteorological Tower(521272016) - AC	19-Sep-20	Iodine-131	3.62E-03	1.46E-02	8.15E-03	pCi/m3
MT1 Meteorological Tower(521863016) - AC	26-Sep-20	Iodine-131	5.92E-03	1.38E-02	7.68E-03	pCi/m3
MT1 Meteorological Tower(522576010) - AC	3-Oct-20	Iodine-131	-2.20E-03	1.43E-02	8.71E-03	pCi/m3
MT1 Meteorological Tower(524007018) - AC	10-Oct-20	Iodine-131	1.46E-03	9.69E-03	5.38E-03	pCi/m3
MT1 Meteorological Tower(524009001) - AC	17-Oct-20	Iodine-131	-4.81E-03	7.91E-03	5.79E-03	pCi/m3
MT1 Meteorological Tower(524695016) - AC	24-Oct-20	Iodine-131	1.35E-03	1.58E-02	8.83E-03	pCi/m3
MT1 Meteorological Tower(525830008) - AC	31-Oct-20	Iodine-131	6.93E-03	6.93E-03	6.80E-03	pCi/m3
MT1 Meteorological Tower(526380001) - AC	7-Nov-20	Iodine-131	1.33E-03	9.14E-03	5.42E-03	pCi/m3
MT1 Meteorological Tower(527613008) - AC	14-Nov-20	Iodine-131	1.10E-03	7.94E-03	4.83E-03	pCi/m3
MT1 Meteorological Tower(527712008) - AC	21-Nov-20	Iodine-131	-3.24E-03	6.90E-03	4.90E-03	pCi/m3
MT1 Meteorological Tower(528790001) - AC	28-Nov-20	Iodine-131	-1.44E-03	6.63E-03	4.54E-03	pCi/m3
MT1 Meteorological Tower(528845010) - AC	5-Dec-20	Iodine-131	-4.57E-03	1.08E-02	7.37E-03	pCi/m3
MT1 Meteorological Tower(529341008) - AC	12-Dec-20	Iodine-131	-1.05E-03	7.60E-03	4.62E-03	pCi/m3
MT1 Meteorological Tower(530196010) - AC	19-Dec-20	Iodine-131	9.11E-04	9.30E-03	5.36E-03	pCi/m3
MT1 Meteorological Tower(530951008) - AC	25-Dec-20	Iodine-131	1.82E-03	8.79E-03	4.79E-03	pCi/m3

MT1 Meteorological Tower - Air Particulate

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
MT1 Meteorological Tower(500231021) - AP	4-Jan-20	BETA	1.77E-02	1.94E-03	9.89E-03	pCi/m3
MT1 Meteorological Tower(500490002) - AP	11-Jan-20	BETA	8.11E-03	2.59E-03	1.16E-02	pCi/m3
MT1 Meteorological Tower(501031017) - AP	18-Jan-20	BETA	1.36E-02	2.07E-03	1.04E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

MT1 Meteorological Tower(502000012) - AP	25-Jan-20	BETA	1.11E-02	2.43E-03	1.46E-02	pCi/m3
MT1 Meteorological Tower(502411017) - AP	1-Feb-20	BETA	2.21E-02	2.59E-03	1.22E-02	pCi/m3
MT1 Meteorological Tower(503155021) - AP	8-Feb-20	BETA	2.29E-02	2.62E-03	1.04E-02	pCi/m3
MT1 Meteorological Tower(503851017) - AP	15-Feb-20	BETA	3.56E-02	2.62E-03	1.14E-02	pCi/m3
MT1 Meteorological Tower(504528017) - AP	22-Feb-20	BETA	2.90E-02	2.22E-03	1.13E-02	pCi/m3
MT1 Meteorological Tower(505332002) - AP	29-Feb-20	BETA	1.76E-02	2.62E-03	1.46E-02	pCi/m3
MT1 Meteorological Tower(505759019) - AP	7-Mar-20	BETA	1.45E-02	2.60E-03	1.21E-02	pCi/m3
MT1 Meteorological Tower(506435009) - AP	14-Mar-20	BETA	1.90E-02	2.65E-03	9.90E-03	pCi/m3
MT1 Meteorological Tower(507015017) - AP	21-Mar-20	BETA	1.30E-02	2.36E-03	1.11E-02	pCi/m3
MT1 Meteorological Tower(507592002) - AP	27-Mar-20	BETA	2.21E-02	2.50E-03	1.07E-02	pCi/m3
MT1 Meteorological Tower(508867017) - AP	4-Apr-20	BETA	7.40E-03	2.11E-03	8.88E-03	pCi/m3
MT1 Meteorological Tower(508984011) - AP	11-Apr-20	BETA	1.20E-02	2.94E-03	1.55E-02	pCi/m3
MT1 Meteorological Tower(509370011) - AP	18-Apr-20	BETA	1.79E-02	2.04E-03	1.03E-02	pCi/m3
MT1 Meteorological Tower(509745017) - AP	25-Apr-20	BETA	4.56E-03	2.30E-03	1.34E-02	pCi/m3
MT1 Meteorological Tower(510179017) - AP	2-May-20	BETA	1.18E-02	2.20E-03	1.22E-02	pCi/m3
MT1 Meteorological Tower(510640017) - AP	9-May-20	BETA	1.41E-02	2.20E-03	1.17E-02	pCi/m3
MT1 Meteorological Tower(510747009) - AP	16-May-20	BETA	7.33E-03	2.45E-03	1.09E-02	pCi/m3
MT1 Meteorological Tower(511437017) - AP	23-May-20	BETA	1.07E-02	2.59E-03	1.14E-02	pCi/m3
MT1 Meteorological Tower(512099017) - AP	30-May-20	BETA	6.22E-03	1.93E-03	1.04E-02	pCi/m3
MT1 Meteorological Tower(512380017) - AP	6-Jun-20	BETA	8.78E-03	2.23E-03	1.08E-02	pCi/m3
MT1 Meteorological Tower(513083014) - AP	13-Jun-20	BETA	7.71E-03	2.23E-03	1.09E-02	pCi/m3
MT1 Meteorological Tower(513584017) - AP	20-Jun-20	BETA	2.49E-03	2.13E-03	1.10E-02	pCi/m3
MT1 Meteorological Tower(514894007) - AP	27-Jun-20	BETA	3.87E-03	2.93E-03	1.25E-02	pCi/m3
MT1 Meteorological Tower(514398009) - AP	4-Jul-20	BETA	7.47E-03	1.89E-03	8.70E-03	pCi/m3
MT1 Meteorological Tower(514716025) - AP	11-Jul-20	BETA	9.95E-03	2.26E-03	1.00E-02	pCi/m3
MT1 Meteorological Tower(515649011) - AP	18-Jul-20	BETA	8.61E-03	2.34E-03	1.28E-02	pCi/m3
MT1 Meteorological Tower(517082017) - AP	25-Jul-20	BETA	8.73E-03	1.88E-03	9.26E-03	pCi/m3
MT1 Meteorological Tower(516773017) - AP	1-Aug-20	BETA	6.17E-03	2.22E-03	1.02E-02	pCi/m3
MT1 Meteorological Tower(517339042) - AP	8-Aug-20	BETA	9.53E-03	2.23E-03	1.15E-02	pCi/m3
MT1 Meteorological Tower(517997023) - AP	15-Aug-20	BETA	9.20E-03	2.65E-03	1.21E-02	pCi/m3
MT1 Meteorological Tower(518816031) - AP	22-Aug-20	BETA	5.33E-03	2.75E-03	1.32E-02	pCi/m3
MT1 Meteorological Tower(518822029) - AP	29-Aug-20	BETA	1.35E-02	2.07E-03	9.92E-03	pCi/m3
MT1 Meteorological Tower(520288019) - AP	5-Sep-20	BETA	2.31E-02	2.24E-03	1.05E-02	pCi/m3
MT1 Meteorological Tower(520368017) - AP	12-Sep-20	BETA	2.65E-02	3.34E-03	1.54E-02	pCi/m3
MT1 Meteorological Tower(521272017) - AP	19-Sep-20	BETA	5.90E-03	2.74E-03	1.56E-02	pCi/m3
MT1 Meteorological Tower(521863017) - AP	26-Sep-20	BETA	7.84E-03	3.56E-03	1.73E-02	pCi/m3
MT1 Meteorological Tower(522576011) - AP	3-Oct-20	BETA	1.82E-02	3.61E-03	1.78E-02	pCi/m3
MT1 Meteorological Tower(524007019) - AP	10-Oct-20	BETA	2.01E-02	2.30E-03	1.11E-02	pCi/m3

2020 DCPD REMP Analysis Results Appendix A

MT1 Meteorological Tower(524009002) - AP	17-Oct-20	BETA	2.35E-02	2.26E-03	1.02E-02	pCi/m3
MT1 Meteorological Tower(524695017) - AP	24-Oct-20	BETA	3.52E-02	2.14E-03	1.22E-02	pCi/m3
MT1 Meteorological Tower(525830009) - AP	31-Oct-20	BETA	6.11E-02	2.08E-03	1.23E-02	pCi/m3
MT1 Meteorological Tower(526380002) - AP	7-Nov-20	BETA	2.32E-02	2.53E-03	1.18E-02	pCi/m3
MT1 Meteorological Tower(527613009) - AP	14-Nov-20	BETA	2.11E-02	2.12E-03	1.04E-02	pCi/m3
MT1 Meteorological Tower(527712009) - AP	21-Nov-20	BETA	2.16E-02	2.50E-03	1.29E-02	pCi/m3
MT1 Meteorological Tower(528790002) - AP	28-Nov-20	BETA	3.17E-02	2.06E-03	9.82E-03	pCi/m3
MT1 Meteorological Tower(528845011) - AP	5-Dec-20	BETA	6.17E-02	2.11E-03	1.16E-02	pCi/m3
MT1 Meteorological Tower(529341009) - AP	12-Dec-20	BETA	2.13E-02	2.10E-03	1.10E-02	pCi/m3
MT1 Meteorological Tower(530196011) - AP	19-Dec-20	BETA	2.39E-02	2.42E-03	1.38E-02	pCi/m3
MT1 Meteorological Tower(530951009) - AP	25-Dec-20	BETA	2.64E-02	2.28E-03	1.04E-02	pCi/m3
MT1 Meteorological Tower(509974001) - AP	14-Feb-20	Cesium-134	-1.04E-04	4.27E-04	2.87E-04	pCi/m3
MT1 Meteorological Tower(516372007) - AP	15-May-20	Cesium-134	9.88E-05	5.70E-04	3.67E-04	pCi/m3
MT1 Meteorological Tower(525316007) - AP	15-Aug-20	Cesium-134	-7.97E-06	3.94E-04	2.40E-04	pCi/m3
MT1 Meteorological Tower(532027007) - AP	14-Nov-20	Cesium-134	1.75E-04	6.75E-04	3.83E-04	pCi/m3
MT1 Meteorological Tower(509974001) - AP	14-Feb-20	Cesium-137	-6.06E-05	5.25E-04	3.18E-04	pCi/m3
MT1 Meteorological Tower(516372007) - AP	15-May-20	Cesium-137	6.69E-05	4.47E-04	2.54E-04	pCi/m3
MT1 Meteorological Tower(525316007) - AP	15-Aug-20	Cesium-137	1.84E-04	4.09E-04	2.39E-04	pCi/m3
MT1 Meteorological Tower(532027007) - AP	14-Nov-20	Cesium-137	-1.85E-05	5.71E-04	3.51E-04	pCi/m3

OEL Offsite Emergency Lab - Drinking Water

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	BETA	9.01E-01	1.49E+00	9.33E-01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	BETA	8.99E-01	1.08E+00	6.99E-01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	BETA	2.56E+00	1.99E+00	1.34E+00	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	BETA	7.13E-01	1.50E+00	9.29E-01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	BETA	2.51E-01	2.09E+00	1.26E+00	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	BETA	8.57E-01	1.70E+00	1.05E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	BETA	5.77E-01	1.77E+00	1.08E+00	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	BETA	1.23E+00	1.37E+00	8.79E-01	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	BETA	2.05E+00	1.47E+00	9.96E-01	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	BETA	1.98E+00	1.06E+00	7.90E-01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	BETA	8.72E-01	8.60E-01	5.79E-01	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	BETA	4.96E-01	1.65E+00	1.00E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Barium-140	3.22E+00	8.28E+00	4.98E+00	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Barium-140	2.65E-01	4.82E+00	2.82E+00	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Barium-140	-2.60E+00	6.40E+00	4.19E+00	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Barium-140	1.44E+00	5.95E+00	3.56E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Barium-140	-2.13E+00	6.77E+00	4.38E+00	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Barium-140	-2.14E+00	1.29E+01	7.78E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Barium-140	-3.76E-01	6.26E+00	3.74E+00	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Barium-140	-7.78E-01	1.01E+01	5.99E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Barium-140	-2.91E+00	8.62E+00	5.39E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Barium-140	2.02E+00	8.20E+00	4.81E+00	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Barium-140	-1.58E+00	7.91E+00	4.78E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Barium-140	3.09E+00	8.63E+00	5.12E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Cesium-134	1.25E-01	1.55E+00	8.84E-01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Cesium-134	-5.12E-01	1.25E+00	8.35E-01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Cesium-134	4.66E-01	1.53E+00	8.80E-01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Cesium-134	-6.84E-01	1.50E+00	1.36E+00	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Cesium-134	6.62E-01	1.60E+00	9.48E-01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Cesium-134	1.93E+00	2.29E+00	3.43E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Cesium-134	2.71E-01	1.40E+00	8.39E-01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Cesium-134	4.48E-01	2.32E+00	1.36E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Cesium-134	-5.51E-02	1.95E+00	1.18E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Cesium-134	-3.17E-01	1.33E+00	8.49E-01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Cesium-134	4.59E-01	1.83E+00	1.08E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Cesium-134	1.54E-01	1.66E+00	1.01E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Cesium-137	1.16E+00	1.57E+00	1.02E+00	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Cesium-137	-3.87E-02	1.26E+00	7.54E-01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Cesium-137	-1.08E+00	1.38E+00	1.38E+00	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Cesium-137	7.33E-01	1.51E+00	9.31E-01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Cesium-137	2.83E-01	1.46E+00	8.36E-01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Cesium-137	-3.71E-01	2.16E+00	1.33E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Cesium-137	-3.85E-02	1.28E+00	7.73E-01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Cesium-137	-7.17E-01	2.29E+00	1.46E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Cesium-137	1.54E+00	1.68E+00	1.13E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Cesium-137	4.93E-01	1.43E+00	8.51E-01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Cesium-137	-5.14E-01	1.80E+00	1.13E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Cesium-137	1.50E+00	1.50E+00	1.86E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Cobalt-58	-8.74E-02	1.44E+00	8.36E-01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Cobalt-58	1.06E+00	1.06E+00	1.22E+00	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Cobalt-58	-1.18E-01	1.27E+00	7.42E-01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Cobalt-58	-2.96E-01	1.24E+00	7.50E-01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Cobalt-58	-7.86E-02	1.39E+00	8.19E-01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Cobalt-58	-1.07E+00	2.25E+00	1.55E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Cobalt-58	-2.45E-01	1.29E+00	8.13E-01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Cobalt-58	-2.22E+00	1.85E+00	1.71E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Cobalt-58	-2.77E-01	1.67E+00	1.04E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Cobalt-58	1.98E-01	1.42E+00	8.54E-01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Cobalt-58	-1.15E-01	1.76E+00	1.07E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Cobalt-58	-2.11E-01	1.67E+00	1.06E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Cobalt-60	-3.30E-02	1.65E+00	9.92E-01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Cobalt-60	9.27E-01	1.48E+00	9.54E-01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Cobalt-60	5.07E-01	1.42E+00	8.35E-01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Cobalt-60	5.31E-01	1.55E+00	9.13E-01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Cobalt-60	-1.21E-02	1.24E+00	7.22E-01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Cobalt-60	-1.04E-01	1.83E+00	1.09E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Cobalt-60	-7.39E-02	1.37E+00	8.14E-01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Cobalt-60	2.39E+00	2.85E+00	2.35E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Cobalt-60	4.93E-01	2.16E+00	1.26E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Cobalt-60	-1.68E-02	1.40E+00	8.29E-01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Cobalt-60	-1.26E+00	1.58E+00	1.24E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Cobalt-60	-1.24E-01	1.62E+00	9.86E-01	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Iodine-131	6.02E-02	8.14E-01	4.77E-01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Iodine-131	-7.59E-02	8.71E-01	5.24E-01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Iodine-131	2.03E-01	4.92E-01	2.89E-01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Iodine-131	2.65E-01	9.76E-01	5.69E-01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Iodine-131	2.74E-01	5.28E-01	3.21E-01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Iodine-131	1.92E-01	5.32E-01	3.17E-01	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Iodine-131	-1.45E-01	7.38E-01	4.36E-01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Iodine-131	2.94E-01	5.39E-01	3.25E-01	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Iodine-131	-2.02E-01	9.05E-01	5.64E-01	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Iodine-131	-1.02E-01	5.64E-01	3.34E-01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Iodine-131	-3.51E-02	6.59E-01	4.48E-01	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Iodine-131	1.35E-01	9.21E-01	5.52E-01	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Iron-55	1.66E+01	6.00E+01	4.49E+01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Iron-55	-5.67E+00	9.22E+01	6.80E+01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Iron-55	1.50E+01	1.14E+02	8.32E+01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Iron-55	1.71E+01	7.71E+01	5.59E+01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Iron-55	1.33E+01	7.25E+01	4.92E+01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Iron-55	-4.38E+01	1.17E+02	7.40E+01	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Iron-55	-6.89E-01	4.17E+01	2.68E+01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Iron-55	3.79E+01	7.68E+01	6.03E+01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Iron-55	1.03E+01	8.16E+01	6.34E+01	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Iron-55	2.51E+01	1.06E+02	7.25E+01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Iron-55	-2.88E+01	1.49E+02	9.26E+01	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Iron-55	3.35E+01	1.46E+02	9.29E+01	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Iron-59	7.18E-02	3.04E+00	1.85E+00	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Iron-59	-6.67E-01	2.26E+00	1.50E+00	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Iron-59	9.05E-04	2.34E+00	1.38E+00	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Iron-59	-3.24E-01	2.47E+00	1.49E+00	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Iron-59	-3.29E-01	2.91E+00	1.79E+00	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Iron-59	4.62E-01	4.84E+00	2.75E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Iron-59	-9.39E-01	2.69E+00	1.93E+00	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Iron-59	-2.33E+00	4.23E+00	3.30E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Iron-59	-3.84E-01	3.75E+00	2.24E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Iron-59	-8.27E-01	2.61E+00	2.21E+00	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Iron-59	-5.14E-01	3.69E+00	2.23E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Iron-59	-9.29E-01	3.31E+00	2.09E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Lanthanum-140	-1.16E+00	2.40E+00	1.70E+00	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Lanthanum-140	-2.46E-01	1.46E+00	1.03E+00	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Lanthanum-140	-4.93E-01	2.10E+00	1.35E+00	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Lanthanum-140	4.62E-01	1.95E+00	1.15E+00	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Lanthanum-140	-5.34E-01	2.14E+00	1.34E+00	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Lanthanum-140	-2.48E+00	4.26E+00	3.12E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Lanthanum-140	3.33E-01	2.21E+00	1.29E+00	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Lanthanum-140	-2.17E+00	3.85E+00	3.18E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Lanthanum-140	8.19E-01	3.59E+00	2.12E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Lanthanum-140	2.76E-02	2.54E+00	1.52E+00	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Lanthanum-140	3.10E-01	3.22E+00	1.93E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Lanthanum-140	3.08E-01	3.11E+00	1.86E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Manganese-54	6.40E-01	1.56E+00	9.10E-01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Manganese-54	-2.47E-01	1.15E+00	7.25E-01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Manganese-54	5.13E-01	1.41E+00	8.16E-01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Manganese-54	3.93E-02	1.38E+00	1.28E+00	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Manganese-54	-2.31E-01	1.28E+00	7.78E-01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Manganese-54	-6.59E-02	2.18E+00	1.32E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Manganese-54	4.32E-01	1.32E+00	7.97E-01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Manganese-54	-1.33E-01	1.90E+00	1.17E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Manganese-54	-1.52E-02	1.79E+00	1.09E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Manganese-54	1.47E-02	1.30E+00	7.95E-01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Manganese-54	-9.48E-02	1.72E+00	1.21E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Manganese-54	-1.39E-01	1.55E+00	9.76E-01	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Nickel-63	1.90E+01	3.15E+01	1.99E+01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Nickel-63	6.91E+00	3.79E+01	2.29E+01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Nickel-63	1.11E+01	1.96E+01	1.21E+01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Nickel-63	-2.12E+01	4.04E+01	2.31E+01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Nickel-63	2.11E+00	3.18E+01	1.90E+01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Nickel-63	1.12E+01	3.01E+01	1.85E+01	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Nickel-63	-1.76E+01	4.01E+01	2.32E+01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Nickel-63	1.64E+01	4.09E+01	2.52E+01	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Nickel-63	2.21E+01	2.95E+01	1.87E+01	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Nickel-63	2.02E+00	1.93E+01	1.16E+01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Nickel-63	1.22E+01	4.03E+01	2.46E+01	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Nickel-63	1.76E+00	3.66E+01	2.19E+01	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Niobium-95	6.13E-01	1.54E+00	9.44E-01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Niobium-95	7.69E-01	1.31E+00	8.07E-01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Niobium-95	1.37E-01	1.40E+00	8.55E-01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Niobium-95	5.14E-01	1.48E+00	9.11E-01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Niobium-95	-5.61E-02	1.45E+00	8.49E-01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Niobium-95	4.94E-01	2.48E+00	1.46E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Niobium-95	4.00E-01	1.30E+00	7.81E-01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Niobium-95	-8.14E-01	2.24E+00	3.08E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Niobium-95	-1.89E-01	1.80E+00	1.10E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Niobium-95	-1.55E+00	1.40E+00	1.74E+00	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Niobium-95	-8.39E-03	1.75E+00	1.05E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Niobium-95	-8.96E-01	1.62E+00	1.15E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Total Strontium	-7.09E-02	5.17E-01	3.00E-01	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Total Strontium	2.32E-01	4.84E-01	3.20E-01	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Total Strontium	4.73E-01	1.09E+00	6.99E-01	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Total Strontium	7.10E-01	8.96E-01	6.20E-01	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Total Strontium	-2.89E-02	9.33E-01	5.51E-01	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Total Strontium	5.63E-01	1.38E+00	8.66E-01	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Total Strontium	4.92E-01	1.07E+00	6.88E-01	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Total Strontium	1.52E-01	8.53E-01	5.28E-01	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Total Strontium	1.32E-01	1.87E+00	1.12E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Total Strontium	2.21E-01	1.56E+00	9.69E-01	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Total Strontium	-2.72E-01	1.35E+00	7.81E-01	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Total Strontium	-3.37E-02	6.65E-01	3.92E-01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Tritium	3.95E+01	2.79E+02	1.68E+02	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Tritium	-1.91E+01	3.10E+02	1.84E+02	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Tritium	5.31E+01	2.92E+02	1.77E+02	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Tritium	7.19E+01	2.79E+02	1.70E+02	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Tritium	1.20E+02	2.59E+02	1.63E+02	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Tritium	1.27E+02	2.72E+02	1.69E+02	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Tritium	5.77E+01	3.30E+02	2.00E+02	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Tritium	6.30E+01	2.59E+02	1.58E+02	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Tritium	1.93E+00	3.23E+02	1.93E+02	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Tritium	-5.13E+01	3.60E+02	2.12E+02	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Tritium	-4.32E+01	2.64E+02	1.55E+02	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Tritium	3.15E+02	3.73E+02	2.50E+02	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Zinc-65	-2.19E+00	2.29E+00	2.02E+00	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Zinc-65	-1.12E+00	2.50E+00	3.36E+00	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Zinc-65	-4.09E-01	2.58E+00	1.79E+00	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Zinc-65	-7.93E-02	2.98E+00	2.57E+00	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Zinc-65	-4.22E+00	2.75E+00	3.74E+00	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Zinc-65	-2.70E+00	3.57E+00	2.72E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Zinc-65	-1.66E+00	2.63E+00	2.08E+00	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Zinc-65	-2.88E+00	3.98E+00	2.95E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Zinc-65	-1.13E+00	3.31E+00	2.12E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Zinc-65	-2.32E-01	2.65E+00	1.56E+00	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Zinc-65	-1.24E+00	3.62E+00	2.32E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Zinc-65	-3.81E-01	3.23E+00	2.23E+00	pCi/L
OEL Offsite Emergency Lab(500502007) - DW	14-Jan-20	Zirconium-95	9.94E-01	2.77E+00	1.69E+00	pCi/L
OEL Offsite Emergency Lab(502412004) - DW	4-Feb-20	Zirconium-95	1.66E-01	2.05E+00	1.22E+00	pCi/L
OEL Offsite Emergency Lab(505351003) - DW	4-Mar-20	Zirconium-95	3.00E-01	2.28E+00	1.39E+00	pCi/L
OEL Offsite Emergency Lab(508672003) - DW	7-Apr-20	Zirconium-95	-2.33E-01	2.20E+00	1.38E+00	pCi/L
OEL Offsite Emergency Lab(509753003) - DW	6-May-20	Zirconium-95	4.04E-01	2.57E+00	1.49E+00	pCi/L
OEL Offsite Emergency Lab(512119003) - DW	2-Jun-20	Zirconium-95	2.99E-01	4.35E+00	2.59E+00	pCi/L
OEL Offsite Emergency Lab(515497001) - DW	7-Jul-20	Zirconium-95	-1.23E+00	2.17E+00	1.53E+00	pCi/L
OEL Offsite Emergency Lab(517959001) - DW	12-Aug-20	Zirconium-95	-8.39E-01	3.62E+00	2.30E+00	pCi/L
OEL Offsite Emergency Lab(520032001) - DW	2-Sep-20	Zirconium-95	-5.74E-01	3.14E+00	1.95E+00	pCi/L
OEL Offsite Emergency Lab(523745001) - DW	6-Oct-20	Zirconium-95	3.16E-01	2.31E+00	1.38E+00	pCi/L
OEL Offsite Emergency Lab(525831003) - DW	3-Nov-20	Zirconium-95	6.69E-01	3.10E+00	1.83E+00	pCi/L
OEL Offsite Emergency Lab(528796003) - DW	2-Dec-20	Zirconium-95	-7.59E-01	2.79E+00	1.82E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OUT Plant Outfall - Seawater

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
OUT Plant Outfall(501627005) - SW	23-Jan-20	BETA	3.04E+02	1.45E+02	1.08E+02	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	BETA	3.48E+02	1.48E+02	1.13E+02	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	BETA	3.95E+02	1.07E+02	1.01E+02	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	BETA	2.42E+02	1.46E+02	1.02E+02	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	BETA	2.30E+02	1.79E+02	1.20E+02	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	BETA	2.73E+02	1.28E+02	9.62E+01	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	BETA	3.87E+02	1.43E+02	1.15E+02	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	BETA	3.89E+02	1.60E+02	1.23E+02	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	BETA	3.35E+02	1.54E+02	1.14E+02	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	BETA	3.00E+02	1.31E+02	9.96E+01	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	BETA	3.84E+02	1.10E+02	1.01E+02	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	BETA	2.68E+02	9.91E+01	8.26E+01	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	BETA	3.07E+02	1.02E+02	8.81E+01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Barium-140	5.47E-02	9.95E+00	5.96E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Barium-140	-1.36E+00	9.69E+00	5.93E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Barium-140	1.65E-01	7.34E+00	4.44E+00	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Barium-140	2.08E+00	7.35E+00	4.68E+00	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Barium-140	-1.76E+00	8.75E+00	5.59E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Barium-140	7.62E+00	1.10E+01	6.88E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Barium-140	4.42E+00	7.38E+00	4.56E+00	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Barium-140	7.99E-02	7.26E+00	5.04E+00	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Barium-140	-8.15E-01	9.68E+00	6.01E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Barium-140	3.89E+00	9.64E+00	5.78E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Barium-140	-9.59E-01	9.47E+00	5.86E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Barium-140	-1.61E+00	8.66E+00	5.28E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Barium-140	-6.43E-02	7.39E+00	4.35E+00	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Cesium-134	6.54E-01	2.03E+00	1.22E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Cesium-134	-1.88E-01	2.34E+00	1.40E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Cesium-134	-1.70E-01	1.64E+00	1.00E+00	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Cesium-134	1.49E-02	1.64E+00	9.99E-01	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Cesium-134	1.85E-03	1.86E+00	1.10E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Cesium-134	7.91E-01	2.30E+00	1.34E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Cesium-134	-1.10E-01	1.44E+00	8.89E-01	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Cesium-134	5.82E-01	1.62E+00	9.55E-01	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Cesium-134	-5.08E-01	2.10E+00	1.29E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Cesium-134	6.98E-01	1.94E+00	1.16E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OUT Plant Outfall(525420001) - SW	26-Oct-20	Cesium-134	-2.98E-01	2.11E+00	1.26E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Cesium-134	-1.34E-01	1.81E+00	1.12E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Cesium-134	2.55E-01	1.46E+00	9.12E-01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Cesium-137	1.15E+00	1.98E+00	1.23E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Cesium-137	-1.60E-01	2.05E+00	1.21E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Cesium-137	7.39E-01	1.49E+00	9.34E-01	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Cesium-137	-1.35E-01	1.53E+00	9.33E-01	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Cesium-137	-6.47E-01	1.68E+00	1.06E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Cesium-137	-4.04E-01	2.42E+00	1.48E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Cesium-137	6.08E-01	1.47E+00	8.83E-01	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Cesium-137	-5.46E-01	1.47E+00	1.05E+00	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Cesium-137	6.60E-01	2.15E+00	1.24E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Cesium-137	-4.31E-01	1.65E+00	1.05E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Cesium-137	-9.53E-01	1.90E+00	1.24E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Cesium-137	5.30E-01	1.98E+00	1.17E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Cesium-137	-3.85E-01	1.42E+00	8.89E-01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Cobalt-58	-8.91E-01	1.69E+00	1.33E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Cobalt-58	-4.52E-01	2.10E+00	1.29E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Cobalt-58	1.29E-01	1.52E+00	8.81E-01	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Cobalt-58	1.68E-01	1.45E+00	9.77E-01	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Cobalt-58	-1.63E-01	1.71E+00	1.02E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Cobalt-58	-7.25E-01	2.12E+00	1.40E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Cobalt-58	-5.70E-01	1.29E+00	8.74E-01	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Cobalt-58	6.28E-01	1.63E+00	9.64E-01	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Cobalt-58	8.34E-02	2.02E+00	1.18E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Cobalt-58	-1.78E-01	1.78E+00	1.10E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Cobalt-58	5.82E-01	2.06E+00	1.34E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Cobalt-58	-1.04E-01	1.81E+00	1.11E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Cobalt-58	-2.72E-01	1.25E+00	8.91E-01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Cobalt-60	-2.19E+00	1.87E+00	2.23E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Cobalt-60	4.56E-01	2.49E+00	1.45E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Cobalt-60	-3.85E-01	1.40E+00	9.12E-01	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Cobalt-60	5.79E-01	1.74E+00	1.00E+00	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Cobalt-60	7.61E-01	1.98E+00	1.14E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Cobalt-60	6.56E-01	2.54E+00	1.44E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Cobalt-60	5.01E-01	1.61E+00	9.34E-01	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Cobalt-60	2.98E-01	1.65E+00	9.90E-01	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Cobalt-60	1.45E+00	2.28E+00	1.40E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OUT Plant Outfall(524334001) - SW	19-Oct-20	Cobalt-60	6.20E-02	2.08E+00	1.28E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Cobalt-60	1.71E-01	2.15E+00	1.29E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Cobalt-60	1.41E+00	2.14E+00	1.30E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Cobalt-60	2.17E-01	1.39E+00	7.93E-01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Iodine-131	-1.92E+00	3.45E+00	3.60E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Iodine-131	-6.20E-01	3.46E+00	2.08E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Iodine-131	-1.21E-01	2.55E+00	1.50E+00	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Iodine-131	-1.51E+00	2.34E+00	1.60E+00	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Iodine-131	-5.16E-01	3.32E+00	2.04E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Iodine-131	1.28E+00	3.32E+00	2.24E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Iodine-131	1.22E+00	2.83E+00	1.67E+00	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Iodine-131	1.70E+00	3.16E+00	1.99E+00	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Iodine-131	-8.33E-01	3.53E+00	2.19E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Iodine-131	-4.47E-01	3.44E+00	2.31E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Iodine-131	5.00E-01	3.25E+00	1.92E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Iodine-131	6.70E-01	2.92E+00	1.68E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Iodine-131	-1.46E+00	2.39E+00	1.60E+00	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Iron-55	3.69E+01	8.59E+01	6.38E+01	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Iron-55	-2.43E+01	9.51E+01	6.74E+01	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Iron-55	3.56E+01	1.48E+02	1.06E+02	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Iron-55	6.46E+00	8.02E+01	5.96E+01	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Iron-55	1.55E+01	1.57E+02	1.10E+02	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Iron-55	7.05E+00	3.91E+01	2.60E+01	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Iron-55	1.71E+00	5.33E+01	3.40E+01	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Iron-55	3.63E+00	8.11E+01	6.13E+01	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Iron-55	7.18E+01	7.87E+01	6.47E+01	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Iron-55	-2.24E+01	1.08E+02	6.80E+01	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Iron-55	-6.75E+00	1.30E+02	8.25E+01	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Iron-55	-1.08E+01	1.84E+02	1.13E+02	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Iron-55	3.78E+01	1.19E+02	7.67E+01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Iron-59	4.86E-02	3.84E+00	2.36E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Iron-59	3.27E+00	4.80E+00	2.65E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Iron-59	1.15E+00	3.31E+00	1.98E+00	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Iron-59	-7.51E-01	3.25E+00	1.98E+00	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Iron-59	4.36E+00	4.36E+00	4.52E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Iron-59	-2.45E+00	4.67E+00	3.57E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Iron-59	-7.59E-01	3.01E+00	1.84E+00	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Iron-59	8.10E-01	3.21E+00	1.91E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OUT Plant Outfall(519822003) - SW	1-Sep-20	Iron-59	-8.03E-03	4.37E+00	2.62E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Iron-59	-7.78E-01	3.74E+00	2.40E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Iron-59	3.95E-01	4.44E+00	2.63E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Iron-59	-1.36E+00	3.85E+00	2.42E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Iron-59	-8.15E-01	2.87E+00	1.89E+00	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Lanthanum-140	7.07E-01	3.07E+00	1.74E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Lanthanum-140	1.88E+00	3.62E+00	2.18E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Lanthanum-140	-4.53E-01	2.26E+00	1.39E+00	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Lanthanum-140	-4.50E-01	2.33E+00	1.46E+00	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Lanthanum-140	-1.53E-01	3.51E+00	2.08E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Lanthanum-140	2.11E-02	3.09E+00	1.84E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Lanthanum-140	-2.29E-01	2.16E+00	1.33E+00	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Lanthanum-140	-6.15E-01	2.25E+00	1.41E+00	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Lanthanum-140	-7.43E-01	2.82E+00	1.78E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Lanthanum-140	-7.08E-01	3.01E+00	1.85E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Lanthanum-140	-9.08E-01	2.92E+00	1.86E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Lanthanum-140	-5.31E-01	2.72E+00	1.70E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Lanthanum-140	-3.70E-01	2.33E+00	1.43E+00	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Manganese-54	1.17E+00	1.79E+00	1.21E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Manganese-54	-6.08E-01	2.07E+00	1.29E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Manganese-54	5.44E-01	1.40E+00	8.23E-01	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Manganese-54	1.08E-01	1.45E+00	8.76E-01	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Manganese-54	7.32E-01	1.83E+00	1.09E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Manganese-54	4.23E-01	2.27E+00	1.34E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Manganese-54	1.82E-01	1.37E+00	8.25E-01	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Manganese-54	7.98E-01	1.50E+00	9.31E-01	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Manganese-54	-6.41E-01	2.09E+00	2.46E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Manganese-54	-2.26E-01	1.60E+00	1.12E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Manganese-54	-4.74E-01	1.80E+00	1.12E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Manganese-54	-2.70E-01	1.66E+00	1.05E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Manganese-54	6.43E-02	1.23E+00	7.43E-01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Nickel-63	5.15E+00	1.64E+01	1.00E+01	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Nickel-63	9.88E-01	4.32E+01	2.58E+01	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Nickel-63	-1.27E+01	3.17E+01	1.85E+01	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Nickel-63	1.34E+00	2.31E+01	1.38E+01	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Nickel-63	1.73E+01	4.34E+01	2.64E+01	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Nickel-63	1.19E+01	3.13E+01	1.93E+01	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Nickel-63	-8.53E+00	3.44E+01	2.03E+01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OUT Plant Outfall(517385001) - SW	10-Aug-20	Nickel-63	-3.08E-01	3.63E+01	2.16E+01	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Nickel-63	3.85E+00	3.55E+01	2.13E+01	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Nickel-63	2.61E+00	3.34E+01	2.00E+01	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Nickel-63	-1.46E+01	4.42E+01	2.56E+01	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Nickel-63	-2.20E-01	2.61E+01	1.55E+01	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Nickel-63	-1.40E+01	2.75E+01	1.58E+01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Niobium-95	-1.10E+00	1.99E+00	1.89E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Niobium-95	6.87E-01	2.18E+00	1.29E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Niobium-95	5.67E-01	1.52E+00	8.91E-01	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Niobium-95	-1.77E-01	1.45E+00	8.99E-01	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Niobium-95	-2.00E+00	2.04E+00	1.99E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Niobium-95	4.07E-01	2.25E+00	1.32E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Niobium-95	4.49E-01	1.45E+00	8.73E-01	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Niobium-95	1.31E+00	1.66E+00	1.16E+00	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Niobium-95	9.63E-01	2.11E+00	1.25E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Niobium-95	9.50E-01	1.84E+00	1.12E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Niobium-95	2.07E+00	2.07E+00	2.44E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Niobium-95	4.94E-01	2.12E+00	2.45E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Niobium-95	1.50E-01	1.41E+00	8.39E-01	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Total Strontium	-2.18E+00	2.37E+00	1.32E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Total Strontium	1.01E+00	1.93E+00	1.22E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Total Strontium	-7.37E-02	2.03E+00	1.21E+00	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Total Strontium	-1.17E+00	3.62E+00	2.13E+00	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Total Strontium	8.30E-01	2.61E+00	1.61E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Total Strontium	-3.73E+00	3.01E+00	1.61E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Total Strontium	-2.46E+00	7.13E+00	3.92E+00	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Total Strontium	-1.44E+00	3.70E+00	2.15E+00	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Total Strontium	-8.08E-01	3.12E+00	1.83E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Total Strontium	4.29E-01	2.41E+00	1.46E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Total Strontium	1.49E+00	1.64E+00	1.10E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Total Strontium	7.38E-01	2.69E+00	1.64E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Total Strontium	6.44E-01	2.26E+00	1.38E+00	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Tritium	5.40E+01	2.64E+02	1.60E+02	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Tritium	-2.34E+02	3.09E+02	1.74E+02	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Tritium	3.23E+01	2.90E+02	1.75E+02	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Tritium	-7.32E+01	2.42E+02	1.41E+02	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Tritium	-4.98E+01	2.69E+02	1.58E+02	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Tritium	2.94E+01	3.02E+02	1.81E+02	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OUT Plant Outfall(514719001) - SW	14-Jul-20	Tritium	4.12E+01	2.78E+02	1.67E+02	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Tritium	-2.74E+01	2.58E+02	1.52E+02	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Tritium	-2.08E+02	3.25E+02	1.84E+02	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Tritium	-1.78E+02	2.86E+02	1.62E+02	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Tritium	1.10E+02	3.18E+02	1.97E+02	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Tritium	1.50E+02	2.37E+02	1.51E+02	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Tritium	2.55E+02	3.57E+02	2.34E+02	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Zinc-65	-2.51E-01	3.95E+00	2.47E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Zinc-65	-1.49E+00	4.76E+00	3.06E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Zinc-65	1.33E+00	3.30E+00	2.22E+00	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Zinc-65	6.02E-01	3.56E+00	2.04E+00	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Zinc-65	-8.87E-01	3.72E+00	2.37E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Zinc-65	1.51E+00	5.76E+00	3.27E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Zinc-65	-3.52E-01	2.90E+00	1.72E+00	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Zinc-65	1.82E-01	3.39E+00	2.03E+00	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Zinc-65	-1.93E+00	4.03E+00	2.75E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Zinc-65	-4.96E-01	3.52E+00	2.51E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Zinc-65	-1.64E+00	3.96E+00	2.64E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Zinc-65	1.41E+00	3.94E+00	2.50E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Zinc-65	1.35E+00	3.00E+00	1.74E+00	pCi/L
OUT Plant Outfall(501627005) - SW	23-Jan-20	Zirconium-95	-5.48E-02	3.07E+00	2.10E+00	pCi/L
OUT Plant Outfall(503808001) - SW	18-Feb-20	Zirconium-95	5.08E-01	3.74E+00	2.18E+00	pCi/L
OUT Plant Outfall(505737001) - SW	3-Mar-20	Zirconium-95	-4.78E-01	2.49E+00	1.49E+00	pCi/L
OUT Plant Outfall(508947003) - SW	13-Apr-20	Zirconium-95	9.81E-01	2.77E+00	1.66E+00	pCi/L
OUT Plant Outfall(510649001) - SW	11-May-20	Zirconium-95	9.86E-01	3.29E+00	1.93E+00	pCi/L
OUT Plant Outfall(513548001) - SW	22-Jun-20	Zirconium-95	-2.60E+00	4.34E+00	4.42E+00	pCi/L
OUT Plant Outfall(514719001) - SW	14-Jul-20	Zirconium-95	6.75E-01	2.56E+00	1.53E+00	pCi/L
OUT Plant Outfall(517385001) - SW	10-Aug-20	Zirconium-95	6.11E-01	2.48E+00	1.44E+00	pCi/L
OUT Plant Outfall(519822003) - SW	1-Sep-20	Zirconium-95	1.32E+00	3.86E+00	2.25E+00	pCi/L
OUT Plant Outfall(524334001) - SW	19-Oct-20	Zirconium-95	2.41E-01	3.04E+00	1.82E+00	pCi/L
OUT Plant Outfall(525420001) - SW	26-Oct-20	Zirconium-95	2.34E-01	3.69E+00	2.13E+00	pCi/L
OUT Plant Outfall(526083001) - SW	5-Nov-20	Zirconium-95	-3.45E-01	3.44E+00	2.11E+00	pCi/L
OUT Plant Outfall(528799003) - SW	2-Dec-20	Zirconium-95	-1.46E-01	2.26E+00	1.38E+00	pCi/L

OW1 Observation Well 01 - Groundwater

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
OW1 Observation Well 01(501846003) - GW	28-Jan-20	BETA	1.40E+01	6.46E+00	4.83E+00	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	BETA	9.99E+00	5.16E+00	3.79E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OW1 Observation Well 01(515652004) - GW	22-Jul-20	BETA	3.19E+00	8.41E+00	5.15E+00	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	BETA	5.84E+00	5.82E+00	3.78E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Barium-140	-3.86E-01	7.35E+00	4.34E+00	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Barium-140	-2.16E+00	8.46E+00	5.12E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Barium-140	1.68E+00	8.33E+00	4.96E+00	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Barium-140	3.98E+00	8.22E+00	5.53E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Cesium-134	-1.02E-01	1.52E+00	9.26E-01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Cesium-134	3.83E-01	2.02E+00	1.19E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Cesium-134	-2.14E-01	1.53E+00	9.01E-01	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Cesium-134	3.75E-01	1.89E+00	1.09E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Cesium-137	4.24E-01	1.66E+00	9.78E-01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Cesium-137	-6.25E-01	1.90E+00	1.19E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Cesium-137	6.09E-01	1.60E+00	9.74E-01	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Cesium-137	2.17E-01	1.77E+00	1.02E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Cobalt-58	3.98E-01	1.49E+00	8.83E-01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Cobalt-58	-6.00E-01	1.86E+00	1.18E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Cobalt-58	-2.56E-01	1.35E+00	8.10E-01	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Cobalt-58	-5.69E-02	1.68E+00	1.12E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Cobalt-60	1.83E-01	1.61E+00	9.23E-01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Cobalt-60	6.58E-01	2.18E+00	1.26E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Cobalt-60	4.96E-01	1.58E+00	9.27E-01	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Cobalt-60	-4.68E-01	1.74E+00	1.10E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Iodine-131	-6.70E-01	2.56E+00	1.53E+00	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Iodine-131	-7.31E-01	3.22E+00	2.02E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Iodine-131	1.39E+00	3.15E+00	3.44E+00	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Iodine-131	1.55E+00	2.96E+00	1.90E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Iron-55	1.26E+01	6.60E+01	4.90E+01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Iron-55	1.39E+01	6.35E+01	4.55E+01	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Iron-55	1.67E+01	4.01E+01	2.69E+01	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Iron-55	-9.16E+00	1.24E+02	7.99E+01	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Iron-59	-1.03E+00	2.85E+00	1.94E+00	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Iron-59	3.44E-01	4.17E+00	2.52E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Iron-59	-9.29E-01	2.96E+00	1.88E+00	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Iron-59	2.00E-01	3.49E+00	2.05E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Lanthanum-140	-8.91E-01	2.16E+00	1.46E+00	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Lanthanum-140	-6.01E-01	3.27E+00	2.02E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Lanthanum-140	2.59E-01	2.87E+00	1.73E+00	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Lanthanum-140	4.88E-01	2.93E+00	1.73E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

OW1 Observation Well 01(501846003) - GW	28-Jan-20	Manganese-54	6.25E-01	1.57E+00	9.43E-01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Manganese-54	8.45E-01	1.95E+00	1.73E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Manganese-54	6.22E-03	1.41E+00	8.16E-01	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Manganese-54	-2.23E-01	1.63E+00	9.73E-01	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Nickel-63	2.64E+01	2.86E+01	1.86E+01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Nickel-63	-7.40E+00	3.37E+01	1.98E+01	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Nickel-63	7.33E+00	2.89E+01	1.76E+01	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Nickel-63	8.80E-01	3.31E+01	1.97E+01	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Niobium-95	1.20E+00	1.47E+00	9.92E-01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Niobium-95	4.90E-01	1.97E+00	1.16E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Niobium-95	7.59E-01	1.63E+00	1.11E+00	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Niobium-95	9.16E-01	1.79E+00	1.97E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Total Strontium	-4.78E-03	9.79E-01	5.83E-01	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Total Strontium	2.00E-01	1.35E+00	8.30E-01	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Total Strontium	-7.57E-01	1.64E+00	9.25E-01	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Total Strontium	-9.28E-01	1.78E+00	9.93E-01	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Tritium	4.99E+02	2.62E+02	2.02E+02	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Tritium	4.12E+02	3.10E+02	2.22E+02	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Tritium	4.94E+02	3.15E+02	2.29E+02	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Tritium	5.86E+02	2.84E+02	2.25E+02	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Zinc-65	8.70E-01	2.81E+00	1.85E+00	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Zinc-65	2.34E-01	4.00E+00	2.78E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Zinc-65	6.87E-01	3.23E+00	2.12E+00	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Zinc-65	8.69E-01	3.76E+00	2.47E+00	pCi/L
OW1 Observation Well 01(501846003) - GW	28-Jan-20	Zirconium-95	-2.05E-01	2.77E+00	1.68E+00	pCi/L
OW1 Observation Well 01(510536003) - GW	5-May-20	Zirconium-95	1.56E+00	3.45E+00	2.06E+00	pCi/L
OW1 Observation Well 01(515652004) - GW	22-Jul-20	Zirconium-95	1.84E+00	2.94E+00	1.87E+00	pCi/L
OW1 Observation Well 01(522579003) - GW	14-Oct-20	Zirconium-95	-3.12E-01	2.94E+00	1.74E+00	pCi/L

PMO Pismo Beach Sand

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
PMO Pismo Beach(506490001) - SD	18-Mar-20	Barium-140	-5.28E+01	2.10E+02	1.38E+02	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Barium-140	-9.51E+01	2.24E+02	1.47E+02	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Cesium-134	4.22E+00	5.00E+01	2.76E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Cesium-134	1.34E+01	6.30E+01	3.55E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Cesium-137	1.37E+01	6.29E+01	3.61E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Cesium-137	1.64E+01	5.60E+01	3.22E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Cobalt-58	5.28E+00	5.55E+01	3.08E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

PMO Pismo Beach(517337001) - SD	6-Aug-20	Cobalt-58	2.63E+01	5.51E+01	3.11E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Cobalt-60	-1.07E+01	6.74E+01	4.23E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Cobalt-60	-1.50E+01	5.74E+01	3.60E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Iron-55	7.26E+03	1.46E+04	1.10E+04	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Iron-55	3.03E+02	1.43E+04	1.10E+04	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Iron-59	-1.46E+01	1.09E+02	6.69E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Iron-59	2.32E+01	1.19E+02	6.84E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Lanthanum-140	-3.24E+01	1.00E+02	7.02E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Lanthanum-140	-7.05E+00	8.11E+01	4.76E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Manganese-54	4.07E+01	6.58E+01	3.65E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Manganese-54	-1.22E+00	4.49E+01	2.59E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Nickel-63	9.06E+02	2.70E+03	1.64E+03	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Nickel-63	-7.21E+02	2.07E+03	1.21E+03	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Niobium-95	2.19E+00	5.86E+01	3.53E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Niobium-95	1.57E+00	5.48E+01	3.10E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Total Strontium	-2.27E+02	4.21E+02	2.12E+02	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Total Strontium	4.88E+02	9.39E+02	6.34E+02	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Zinc-65	2.36E+01	1.66E+02	9.38E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Zinc-65	2.18E+01	1.34E+02	8.88E+01	pCi/kg
PMO Pismo Beach(506490001) - SD	18-Mar-20	Zirconium-95	4.42E+01	1.14E+02	6.11E+01	pCi/kg
PMO Pismo Beach(517337001) - SD	6-Aug-20	Zirconium-95	-9.78E+00	8.35E+01	4.88E+01	pCi/kg

PON Pacific Ocean North of Diablo Cove - Aquatic Vegetation Kelp

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
PON Pacific Ocean North of Diablo Cove(501627003) - AV Kelp	23-Jan-20	Cesium-134	7.01E+00	8.89E+00	9.56E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(509770001) - AV Kelp	13-Apr-20	Cesium-134	1.19E+01	1.19E+01	1.33E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(514717003) - AV Kelp	14-Jul-20	Cesium-134	4.04E+00	1.96E+01	1.17E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(522578002) - AV Kelp	19-Oct-20	Cesium-134	6.54E-01	1.40E+01	8.46E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(525420006) - AV Kelp	26-Oct-20	Cesium-134	5.99E-02	1.26E+01	7.76E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(501627003) - AV Kelp	23-Jan-20	Cesium-137	3.09E+00	8.61E+00	5.08E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(509770001) - AV Kelp	13-Apr-20	Cesium-137	-3.38E+00	9.05E+00	6.00E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(514717003) - AV Kelp	14-Jul-20	Cesium-137	1.64E+00	1.59E+01	9.51E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(522578002) - AV Kelp	19-Oct-20	Cesium-137	-2.05E+00	1.38E+01	9.42E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(525420006) - AV Kelp	26-Oct-20	Cesium-137	-2.13E+00	9.99E+00	6.38E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(501627003) - AV Kelp	23-Jan-20	Cobalt-58	4.89E-01	7.56E+00	4.54E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(509770001) - AV Kelp	13-Apr-20	Cobalt-58	6.97E+00	6.97E+00	6.33E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(514717003) - AV Kelp	14-Jul-20	Cobalt-58	-5.96E+00	1.91E+01	1.28E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(522578002) - AV Kelp	19-Oct-20	Cobalt-58	2.86E+00	1.26E+01	7.43E+00	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

PON Pacific Ocean North of Diablo Cove(525420006) - AV Kelp	26-Oct-20	Cobalt-58	1.44E+00	1.17E+01	7.11E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(501627003) - AV Kelp	23-Jan-20	Cobalt-60	-3.44E+00	9.40E+00	6.11E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(509770001) - AV Kelp	13-Apr-20	Cobalt-60	-2.04E+00	1.20E+01	7.49E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(514717003) - AV Kelp	14-Jul-20	Cobalt-60	5.45E+00	2.36E+01	1.37E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(522578002) - AV Kelp	19-Oct-20	Cobalt-60	-4.80E+00	1.50E+01	9.64E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(525420006) - AV Kelp	26-Oct-20	Cobalt-60	1.64E+00	1.36E+01	7.96E+00	pCi/kg

PON Pacific Ocean North of Diablo Cove - Fish Perch

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
PON Pacific Ocean North of Diablo Cove(504740005) - FH Perch	12-Feb-20	Cesium-134	1.49E+00	2.34E+01	1.37E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081003) - FH Perch	10-Jun-20	Cesium-134	-2.88E+00	1.99E+01	1.37E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473007) - FH Perch	29-Jul-20	Cesium-134	8.87E+00	2.92E+01	1.79E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(523223002) - FH Perch	19-Oct-20	Cesium-134	3.34E+00	1.56E+01	9.26E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740005) - FH Perch	12-Feb-20	Cesium-137	7.63E+00	2.33E+01	1.42E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081003) - FH Perch	10-Jun-20	Cesium-137	3.64E+00	1.94E+01	1.60E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473007) - FH Perch	29-Jul-20	Cesium-137	1.49E+01	2.47E+01	2.89E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(523223002) - FH Perch	19-Oct-20	Cesium-137	3.42E+00	1.65E+01	9.76E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740005) - FH Perch	12-Feb-20	Cobalt-58	3.62E+00	2.62E+01	1.52E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081003) - FH Perch	10-Jun-20	Cobalt-58	6.88E+00	1.95E+01	1.16E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473007) - FH Perch	29-Jul-20	Cobalt-58	2.57E+00	2.63E+01	1.63E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(523223002) - FH Perch	19-Oct-20	Cobalt-58	1.13E+00	1.69E+01	1.14E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740005) - FH Perch	12-Feb-20	Cobalt-60	-3.97E+00	2.41E+01	1.54E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081003) - FH Perch	10-Jun-20	Cobalt-60	9.08E-01	1.94E+01	1.14E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473007) - FH Perch	29-Jul-20	Cobalt-60	2.42E+00	2.77E+01	1.64E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(523223002) - FH Perch	19-Oct-20	Cobalt-60	1.06E+01	1.72E+01	1.07E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740005) - FH Perch	12-Feb-20	Iron-59	-1.31E+01	5.54E+01	3.55E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081003) - FH Perch	10-Jun-20	Iron-59	1.75E+01	3.69E+01	4.22E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473007) - FH Perch	29-Jul-20	Iron-59	1.91E+01	6.50E+01	3.79E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(523223002) - FH Perch	19-Oct-20	Iron-59	1.78E+00	4.00E+01	2.32E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740005) - FH Perch	12-Feb-20	Manganese-54	6.37E+00	2.33E+01	1.51E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081003) - FH Perch	10-Jun-20	Manganese-54	-6.94E+00	1.78E+01	1.13E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473007) - FH Perch	29-Jul-20	Manganese-54	-5.68E+00	2.64E+01	1.74E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(523223002) - FH Perch	19-Oct-20	Manganese-54	-6.84E+00	1.40E+01	9.83E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740005) - FH Perch	12-Feb-20	Zinc-65	-1.26E+01	4.94E+01	3.18E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081003) - FH Perch	10-Jun-20	Zinc-65	2.25E+01	3.97E+01	2.76E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473007) - FH Perch	29-Jul-20	Zinc-65	2.94E+01	6.02E+01	3.56E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(523223002) - FH Perch	19-Oct-20	Zinc-65	-1.18E+00	3.78E+01	2.22E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

PON Pacific Ocean North of Diablo Cove - Rockfish

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
PON Pacific Ocean North of Diablo Cove(504740001) - FH Rockfsh	12-Feb-20	Cesium-134	-4.37E+00	2.11E+01	1.32E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081005) - FH Rockfsh	10-Jun-20	Cesium-134	5.27E+00	2.09E+01	1.26E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473008) - FH Rockfsh	29-Jul-20	Cesium-134	-8.28E+00	3.22E+01	2.16E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(525676003) - FH Rockfsh	19-Oct-20	Cesium-134	-4.03E+00	2.44E+01	1.49E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740001) - FH Rockfsh	12-Feb-20	Cesium-137	1.26E+01	2.23E+01	1.35E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081005) - FH Rockfsh	10-Jun-20	Cesium-137	6.82E+00	2.05E+01	1.23E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473008) - FH Rockfsh	29-Jul-20	Cesium-137	6.37E+00	3.69E+01	3.27E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(525676003) - FH Rockfsh	19-Oct-20	Cesium-137	1.47E+01	2.27E+01	2.10E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740001) - FH Rockfsh	12-Feb-20	Cobalt-58	8.28E+00	2.27E+01	1.33E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081005) - FH Rockfsh	10-Jun-20	Cobalt-58	1.39E+01	2.13E+01	1.34E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473008) - FH Rockfsh	29-Jul-20	Cobalt-58	-4.55E+00	2.90E+01	1.90E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(525676003) - FH Rockfsh	19-Oct-20	Cobalt-58	-9.90E-01	2.67E+01	1.58E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740001) - FH Rockfsh	12-Feb-20	Cobalt-60	-1.82E+01	2.25E+01	2.15E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081005) - FH Rockfsh	10-Jun-20	Cobalt-60	9.50E+00	2.77E+01	2.58E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473008) - FH Rockfsh	29-Jul-20	Cobalt-60	7.30E+00	3.96E+01	2.32E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(525676003) - FH Rockfsh	19-Oct-20	Cobalt-60	-4.11E+00	2.45E+01	1.57E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740001) - FH Rockfsh	12-Feb-20	Iron-59	2.63E+01	5.59E+01	3.36E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081005) - FH Rockfsh	10-Jun-20	Iron-59	8.19E+00	4.00E+01	2.45E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473008) - FH Rockfsh	29-Jul-20	Iron-59	-1.84E+01	5.88E+01	4.06E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(525676003) - FH Rockfsh	19-Oct-20	Iron-59	1.01E+01	6.12E+01	3.62E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740001) - FH Rockfsh	12-Feb-20	Manganese-54	4.41E+00	2.08E+01	1.22E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081005) - FH Rockfsh	10-Jun-20	Manganese-54	1.67E-01	1.86E+01	1.15E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473008) - FH Rockfsh	29-Jul-20	Manganese-54	-8.07E+00	3.12E+01	2.10E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(525676003) - FH Rockfsh	19-Oct-20	Manganese-54	-7.93E+00	1.99E+01	1.31E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(504740001) - FH Rockfsh	12-Feb-20	Zinc-65	1.41E+01	4.90E+01	2.93E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(513081005) - FH Rockfsh	10-Jun-20	Zinc-65	1.74E+01	4.15E+01	2.52E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(517473008) - FH Rockfsh	29-Jul-20	Zinc-65	1.59E+01	7.56E+01	4.39E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(525676003) - FH Rockfsh	19-Oct-20	Zinc-65	-2.26E+00	5.14E+01	3.14E+01	pCi/kg

PON Pacific Ocean North of Diablo Cove - Intertidal Mussels

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
PON Pacific Ocean North of Diablo Cove(500916006) - IM	21-Jan-20	Cesium-134	3.19E+00	1.57E+01	9.30E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(500916006) - IM	21-Jan-20	Cesium-137	3.91E+00	1.44E+01	8.42E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(500916006) - IM	21-Jan-20	Cobalt-58	7.92E+00	1.64E+01	1.07E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(500916006) - IM	21-Jan-20	Cobalt-60	5.29E+00	1.76E+01	1.01E+01	pCi/kg
PON Pacific Ocean North of Diablo Cove(500916006) - IM	21-Jan-20	Iron-59	-7.53E+00	4.13E+01	2.50E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

PON Pacific Ocean North of Diablo Cove(500916006) - IM	21-Jan-20	Manganese-54	2.72E+00	1.47E+01	8.77E+00	pCi/kg
PON Pacific Ocean North of Diablo Cove(500916006) - IM	21-Jan-20	Zinc-65	7.00E+00	3.55E+01	2.03E+01	pCi/kg

POS Pacific Ocean South of Diablo Cove - Aquatic Vegetation Kelp

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
POS Pacific Ocean South of Diablo Cove(501627002) - AV Kelp	23-Jan-20	Cesium-134	3.44E-02	1.31E+01	8.10E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(509770004) - AV Kelp	13-Apr-20	Cesium-134	1.54E+00	8.66E+00	4.93E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(514717004) - AV Kelp	14-Jul-20	Cesium-134	1.40E+01	1.81E+01	2.12E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(522578003) - AV Kelp	19-Oct-20	Cesium-134	4.29E+00	1.37E+01	8.27E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(525420005) - AV Kelp	26-Oct-20	Cesium-134	-1.13E-01	8.94E+00	5.35E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(501627002) - AV Kelp	23-Jan-20	Cesium-137	2.55E+00	1.21E+01	7.21E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(509770004) - AV Kelp	13-Apr-20	Cesium-137	1.97E+00	7.70E+00	4.63E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(514717004) - AV Kelp	14-Jul-20	Cesium-137	4.36E+00	1.49E+01	8.49E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(522578003) - AV Kelp	19-Oct-20	Cesium-137	7.09E+00	1.24E+01	8.78E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(525420005) - AV Kelp	26-Oct-20	Cesium-137	-1.36E+00	8.09E+00	5.11E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(501627002) - AV Kelp	23-Jan-20	Cobalt-58	-3.02E+00	1.27E+01	8.31E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(509770004) - AV Kelp	13-Apr-20	Cobalt-58	-1.68E+00	7.24E+00	5.00E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(514717004) - AV Kelp	14-Jul-20	Cobalt-58	-5.39E+00	1.50E+01	1.03E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(522578003) - AV Kelp	19-Oct-20	Cobalt-58	3.72E+00	1.26E+01	7.57E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(525420005) - AV Kelp	26-Oct-20	Cobalt-58	-7.67E-01	7.83E+00	4.77E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(501627002) - AV Kelp	23-Jan-20	Cobalt-60	1.22E+00	1.54E+01	8.97E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(509770004) - AV Kelp	13-Apr-20	Cobalt-60	6.35E+00	9.54E+00	5.80E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(514717004) - AV Kelp	14-Jul-20	Cobalt-60	2.57E+00	1.72E+01	9.98E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(522578003) - AV Kelp	19-Oct-20	Cobalt-60	-8.07E+00	1.41E+01	1.01E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(525420005) - AV Kelp	26-Oct-20	Cobalt-60	-2.89E+00	8.73E+00	5.84E+00	pCi/kg

POS Pacific Ocean South of Diablo Cove - Fish Perch

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
POS Pacific Ocean South of Diablo Cove(504740006) - FH Perch	12-Feb-20	Cesium-134	1.03E+01	2.64E+01	1.60E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081004) - FH Perch	3-Jun-20	Cesium-134	-3.83E+00	1.92E+01	1.24E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473009) - FH Perch	27-Jul-20	Cesium-134	-1.08E+01	2.38E+01	2.05E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223003) - FH Perch	9-Oct-20	Cesium-134	-8.75E+00	1.85E+01	1.31E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740006) - FH Perch	12-Feb-20	Cesium-137	1.79E+01	2.74E+01	1.75E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081004) - FH Perch	3-Jun-20	Cesium-137	-1.70E+01	1.95E+01	1.81E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473009) - FH Perch	27-Jul-20	Cesium-137	4.85E+00	2.18E+01	1.32E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223003) - FH Perch	9-Oct-20	Cesium-137	1.18E+01	2.10E+01	1.29E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740006) - FH Perch	12-Feb-20	Cobalt-58	8.11E+00	2.79E+01	1.68E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081004) - FH Perch	3-Jun-20	Cobalt-58	8.69E-02	1.84E+01	1.14E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

POS Pacific Ocean South of Diablo Cove(517473009) - FH Perch	27-Jul-20	Cobalt-58	-7.31E+00	1.98E+01	1.36E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223003) - FH Perch	9-Oct-20	Cobalt-58	-1.21E+00	2.37E+01	1.49E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740006) - FH Perch	12-Feb-20	Cobalt-60	-5.94E+00	2.20E+01	1.88E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081004) - FH Perch	3-Jun-20	Cobalt-60	-1.26E+00	1.65E+01	1.00E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473009) - FH Perch	27-Jul-20	Cobalt-60	-5.35E+00	2.31E+01	1.47E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223003) - FH Perch	9-Oct-20	Cobalt-60	-2.32E+00	2.13E+01	1.33E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740006) - FH Perch	12-Feb-20	Iron-59	8.59E+00	5.71E+01	3.48E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081004) - FH Perch	3-Jun-20	Iron-59	-7.31E+00	3.97E+01	2.44E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473009) - FH Perch	27-Jul-20	Iron-59	1.38E+01	4.73E+01	2.71E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223003) - FH Perch	9-Oct-20	Iron-59	4.77E+01	6.58E+01	4.08E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740006) - FH Perch	12-Feb-20	Manganese-54	-4.13E+00	2.00E+01	1.30E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081004) - FH Perch	3-Jun-20	Manganese-54	1.75E+00	1.89E+01	1.15E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473009) - FH Perch	27-Jul-20	Manganese-54	7.91E+00	2.33E+01	1.43E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223003) - FH Perch	9-Oct-20	Manganese-54	4.37E-01	1.91E+01	1.19E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740006) - FH Perch	12-Feb-20	Zinc-65	1.91E+01	5.67E+01	3.44E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081004) - FH Perch	3-Jun-20	Zinc-65	-3.51E+01	4.07E+01	3.98E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473009) - FH Perch	27-Jul-20	Zinc-65	9.88E+00	4.88E+01	2.82E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223003) - FH Perch	9-Oct-20	Zinc-65	1.84E+01	5.31E+01	3.10E+01	pCi/kg

POS Pacific Ocean South of Diablo Cove - Rockfish

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
POS Pacific Ocean South of Diablo Cove(504740002) - FH Rockfsh	12-Feb-20	Cesium-134	9.88E+00	2.47E+01	1.47E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081006) - FH Rockfsh	3-Jun-20	Cesium-134	8.01E+00	2.89E+01	1.71E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473010) - FH Rockfsh	27-Jul-20	Cesium-134	-2.20E+01	2.48E+01	2.61E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(525676004) - FH Rockfsh	9-Oct-20	Cesium-134	5.73E+00	2.13E+01	1.22E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740002) - FH Rockfsh	12-Feb-20	Cesium-137	-7.41E+00	2.62E+01	2.16E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081006) - FH Rockfsh	3-Jun-20	Cesium-137	2.51E+01	2.51E+01	2.20E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473010) - FH Rockfsh	27-Jul-20	Cesium-137	1.09E+01	2.32E+01	2.02E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(525676004) - FH Rockfsh	9-Oct-20	Cesium-137	2.29E+00	1.83E+01	1.25E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740002) - FH Rockfsh	12-Feb-20	Cobalt-58	-1.23E+00	2.45E+01	1.53E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081006) - FH Rockfsh	3-Jun-20	Cobalt-58	1.60E-01	2.27E+01	1.39E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473010) - FH Rockfsh	27-Jul-20	Cobalt-58	-1.00E+01	2.25E+01	1.48E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(525676004) - FH Rockfsh	9-Oct-20	Cobalt-58	2.82E+00	2.33E+01	1.34E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740002) - FH Rockfsh	12-Feb-20	Cobalt-60	-4.82E-01	2.52E+01	1.53E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081006) - FH Rockfsh	3-Jun-20	Cobalt-60	5.14E+00	2.65E+01	1.67E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473010) - FH Rockfsh	27-Jul-20	Cobalt-60	7.73E+00	2.50E+01	1.67E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(525676004) - FH Rockfsh	9-Oct-20	Cobalt-60	2.31E+00	1.90E+01	1.12E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740002) - FH Rockfsh	12-Feb-20	Iron-59	-9.97E+00	6.00E+01	4.24E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

POS Pacific Ocean South of Diablo Cove(513081006) - FH Rockfsh	3-Jun-20	Iron-59	6.06E+00	6.86E+01	3.96E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473010) - FH Rockfsh	27-Jul-20	Iron-59	4.94E+01	4.94E+01	4.64E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(525676004) - FH Rockfsh	9-Oct-20	Iron-59	-1.58E+00	5.22E+01	3.12E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740002) - FH Rockfsh	12-Feb-20	Manganese-54	6.76E+00	2.59E+01	1.56E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081006) - FH Rockfsh	3-Jun-20	Manganese-54	1.36E+00	2.67E+01	1.63E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473010) - FH Rockfsh	27-Jul-20	Manganese-54	-2.10E+00	2.32E+01	1.40E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(525676004) - FH Rockfsh	9-Oct-20	Manganese-54	-4.07E+00	1.92E+01	1.17E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(504740002) - FH Rockfsh	12-Feb-20	Zinc-65	-7.05E+00	5.26E+01	3.68E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(513081006) - FH Rockfsh	3-Jun-20	Zinc-65	-8.95E+01	5.26E+01	6.00E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(517473010) - FH Rockfsh	27-Jul-20	Zinc-65	2.14E+00	5.14E+01	3.62E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(525676004) - FH Rockfsh	9-Oct-20	Zinc-65	1.86E+01	4.36E+01	2.39E+01	pCi/kg

POS Pacific Ocean South of Diablo Cove - Intertidal Mussels

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
POS Pacific Ocean South of Diablo Cove(500916001) - IM	21-Jan-20	Cesium-134	6.27E+00	1.68E+01	1.42E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(509741002) - IM	14-Apr-20	Cesium-134	-2.56E+00	1.99E+01	1.22E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(515653003) - IM	23-Jul-20	Cesium-134	6.76E+00	2.06E+01	1.31E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223010) - IM	27-Oct-20	Cesium-134	7.33E+00	1.89E+01	1.67E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(500916001) - IM	21-Jan-20	Cesium-137	1.07E+00	1.50E+01	8.80E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(509741002) - IM	14-Apr-20	Cesium-137	-4.74E-01	2.05E+01	1.21E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(515653003) - IM	23-Jul-20	Cesium-137	1.18E+00	1.86E+01	1.13E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223010) - IM	27-Oct-20	Cesium-137	2.86E+00	1.81E+01	1.10E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(500916001) - IM	21-Jan-20	Cobalt-58	2.11E-01	1.57E+01	1.02E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(509741002) - IM	14-Apr-20	Cobalt-58	-1.53E+01	1.72E+01	1.84E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(515653003) - IM	23-Jul-20	Cobalt-58	8.61E-01	1.88E+01	1.09E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223010) - IM	27-Oct-20	Cobalt-58	-7.63E+00	1.65E+01	1.95E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(500916001) - IM	21-Jan-20	Cobalt-60	-1.72E+00	1.54E+01	9.40E+00	pCi/kg
POS Pacific Ocean South of Diablo Cove(509741002) - IM	14-Apr-20	Cobalt-60	-3.98E+00	1.67E+01	1.07E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(515653003) - IM	23-Jul-20	Cobalt-60	4.57E+00	2.21E+01	1.31E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223010) - IM	27-Oct-20	Cobalt-60	-3.70E-01	1.70E+01	1.01E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(500916001) - IM	21-Jan-20	Iron-59	-2.87E+00	3.58E+01	2.45E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(509741002) - IM	14-Apr-20	Iron-59	7.05E+00	4.07E+01	2.43E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(515653003) - IM	23-Jul-20	Iron-59	-4.50E+00	4.60E+01	2.82E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223010) - IM	27-Oct-20	Iron-59	3.20E+00	3.66E+01	2.21E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(500916001) - IM	21-Jan-20	Manganese-54	-3.48E+00	1.47E+01	1.06E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(509741002) - IM	14-Apr-20	Manganese-54	4.50E+00	2.38E+01	1.83E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(515653003) - IM	23-Jul-20	Manganese-54	-8.99E-01	1.79E+01	1.06E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223010) - IM	27-Oct-20	Manganese-54	-1.47E+00	1.67E+01	1.00E+01	pCi/kg

2020 DCPD REMP Analysis Results Appendix A

POS Pacific Ocean South of Diablo Cove(500916001) - IM	21-Jan-20	Zinc-65	2.05E+00	3.73E+01	2.50E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(509741002) - IM	14-Apr-20	Zinc-65	5.48E-02	4.20E+01	2.58E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(515653003) - IM	23-Jul-20	Zinc-65	-1.12E+01	4.07E+01	2.63E+01	pCi/kg
POS Pacific Ocean South of Diablo Cove(523223010) - IM	27-Oct-20	Zinc-65	-3.40E+00	3.61E+01	2.59E+01	pCi/kg

WN2 Diablo Creek Outlet - Drinking Water

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	BETA	1.40E+00	2.33E+00	1.46E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	BETA	2.32E+00	2.71E+00	1.72E+00	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	BETA	2.35E+00	2.04E+00	1.36E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	BETA	3.01E+00	1.92E+00	1.35E+00	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Barium-140	4.21E+00	8.56E+00	5.29E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Barium-140	-2.74E+00	5.44E+00	3.62E+00	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Barium-140	1.16E+00	1.14E+01	6.58E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Barium-140	-3.05E-01	8.10E+00	4.78E+00	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Cesium-134	5.24E-02	1.64E+00	9.58E-01	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Cesium-134	7.14E-01	1.69E+00	1.02E+00	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Cesium-134	-1.88E+00	2.16E+00	2.23E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Cesium-134	-4.85E-02	1.53E+00	9.19E-01	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Cesium-137	-3.04E-01	1.64E+00	9.76E-01	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Cesium-137	-3.35E-01	1.47E+00	9.10E-01	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Cesium-137	1.10E+00	2.42E+00	1.43E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Cesium-137	2.75E-01	1.40E+00	8.23E-01	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Cobalt-58	4.13E-01	1.65E+00	9.54E-01	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Cobalt-58	-5.06E-01	1.20E+00	8.09E-01	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Cobalt-58	-5.80E-01	2.13E+00	1.37E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Cobalt-58	-4.30E-01	1.38E+00	8.84E-01	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Cobalt-60	-3.42E-01	1.69E+00	1.09E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Cobalt-60	-8.49E-01	1.13E+00	9.85E-01	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Cobalt-60	1.05E+00	2.24E+00	1.25E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Cobalt-60	5.33E-02	1.55E+00	1.24E+00	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Iodine-131	8.22E-01	8.22E-01	6.91E-01	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Iodine-131	-1.19E-01	5.47E-01	3.27E-01	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Iodine-131	2.44E-02	6.61E-01	3.81E-01	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Iodine-131	8.42E-02	6.12E-01	3.51E-01	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Iron-55	2.75E+01	6.56E+01	4.98E+01	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Iron-55	1.07E+01	7.94E+01	5.93E+01	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Iron-55	-2.14E+00	4.56E+01	2.90E+01	pCi/L

2020 DCPD REMP Analysis Results Appendix A

WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Iron-55	4.72E+01	1.22E+02	8.41E+01	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Iron-59	-5.57E-01	3.48E+00	2.16E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Iron-59	-1.33E+00	2.53E+00	1.83E+00	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Iron-59	-3.46E-01	4.29E+00	2.52E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Iron-59	-7.54E-01	2.51E+00	1.66E+00	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Lanthanum-140	8.84E-01	2.89E+00	1.65E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Lanthanum-140	-1.02E+00	2.62E+00	2.78E+00	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Lanthanum-140	-1.82E+00	4.06E+00	2.80E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Lanthanum-140	-9.64E-01	2.46E+00	1.61E+00	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Manganese-54	-5.77E-01	1.62E+00	1.03E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Manganese-54	-7.72E-02	1.34E+00	8.62E-01	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Manganese-54	2.85E-01	1.98E+00	1.31E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Manganese-54	8.00E-01	1.25E+00	1.18E+00	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Nickel-63	1.52E+01	2.85E+01	1.79E+01	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Nickel-63	1.20E+01	3.43E+01	2.11E+01	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Nickel-63	-1.13E+01	3.89E+01	2.27E+01	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Nickel-63	3.19E-01	2.17E+01	1.29E+01	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Niobium-95	-1.43E+00	1.68E+00	2.11E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Niobium-95	-1.08E+00	1.50E+00	1.46E+00	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Niobium-95	-1.08E-01	2.35E+00	1.42E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Niobium-95	-5.91E-01	1.33E+00	8.83E-01	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Total Strontium	-3.18E-01	4.43E-01	2.21E-01	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Total Strontium	4.79E-01	1.43E+00	9.01E-01	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Total Strontium	-2.64E-01	1.34E+00	7.77E-01	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Total Strontium	3.52E-01	1.54E+00	9.68E-01	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Tritium	-3.31E+01	2.82E+02	1.66E+02	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Tritium	-6.84E+01	2.38E+02	1.39E+02	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Tritium	6.07E+01	3.20E+02	1.94E+02	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Tritium	7.65E+01	3.48E+02	2.12E+02	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Zinc-65	-5.86E-01	3.79E+00	2.35E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Zinc-65	-1.39E+00	2.68E+00	2.18E+00	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Zinc-65	6.52E-01	4.70E+00	2.98E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Zinc-65	5.54E-01	2.76E+00	1.66E+00	pCi/L
WN2 Diablo Creek Outlet(500502008) - DW	14-Jan-20	Zirconium-95	6.67E-01	2.97E+00	1.71E+00	pCi/L
WN2 Diablo Creek Outlet(508985002) - DW	14-Apr-20	Zirconium-95	-2.40E-02	2.37E+00	1.43E+00	pCi/L
WN2 Diablo Creek Outlet(515497002) - DW	7-Jul-20	Zirconium-95	-8.91E-01	3.91E+00	2.47E+00	pCi/L
WN2 Diablo Creek Outlet(523745002) - DW	6-Oct-20	Zirconium-95	-6.33E-01	2.41E+00	1.52E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

WW2 Water Well 02 - Drinking Water

Sample Name	Date Collected	Nuclide	Result	MDC	2 Sigma TPU	Units
WW2 Water Well 02(500502005) - DW	14-Jan-20	BETA	2.43E+00	2.15E+00	1.46E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	BETA	4.91E+00	2.85E+00	2.02E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	BETA	4.04E+00	1.95E+00	1.51E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	BETA	1.55E+00	3.05E+00	1.89E+00	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Barium-140	-6.73E+00	8.29E+00	9.65E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Barium-140	4.30E+00	1.16E+01	6.79E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Barium-140	1.27E+00	8.65E+00	5.16E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Barium-140	-1.14E+01	8.27E+00	8.80E+00	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Cesium-134	1.78E-01	1.99E+00	1.14E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Cesium-134	-9.77E-01	2.79E+00	1.82E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Cesium-134	4.69E-02	1.67E+00	9.60E-01	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Cesium-134	2.21E-01	1.59E+00	9.27E-01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Cesium-137	1.31E+00	1.83E+00	9.47E-01	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Cesium-137	8.32E-02	2.72E+00	1.61E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Cesium-137	3.14E-02	1.76E+00	1.20E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Cesium-137	6.51E-01	1.58E+00	9.57E-01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Cobalt-58	3.11E-01	1.80E+00	1.16E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Cobalt-58	-7.60E-01	2.32E+00	1.52E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Cobalt-58	9.46E-01	1.70E+00	1.02E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Cobalt-58	-4.95E-01	1.37E+00	9.88E-01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Cobalt-60	-4.49E-01	2.06E+00	1.31E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Cobalt-60	-5.45E-01	2.85E+00	2.00E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Cobalt-60	-4.49E-01	1.74E+00	1.42E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Cobalt-60	-3.07E-01	1.52E+00	9.40E-01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Iodine-131	4.15E-02	8.98E-01	5.17E-01	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Iodine-131	-9.08E-02	5.74E-01	3.40E-01	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Iodine-131	-5.78E-03	5.42E-01	3.12E-01	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Iodine-131	-6.64E-02	6.14E-01	3.68E-01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Iron-55	2.36E+01	6.60E+01	4.98E+01	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Iron-55	-2.17E+01	8.06E+01	5.84E+01	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Iron-55	3.78E+01	4.70E+01	3.36E+01	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Iron-55	3.09E+01	1.31E+02	8.86E+01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Iron-59	7.91E-01	4.26E+00	2.50E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Iron-59	1.35E+00	5.64E+00	3.20E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Iron-59	-2.38E-01	3.12E+00	2.13E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Iron-59	-2.46E+00	2.79E+00	2.20E+00	pCi/L

2020 DCPD REMP Analysis Results Appendix A

WW2 Water Well 02(500502005) - DW	14-Jan-20	Lanthanum-140	3.09E-01	3.08E+00	1.76E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Lanthanum-140	1.26E-01	4.47E+00	2.65E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Lanthanum-140	-1.52E+00	2.65E+00	1.91E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Lanthanum-140	9.91E-01	3.19E+00	1.85E+00	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Manganese-54	-9.90E-02	1.79E+00	1.05E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Manganese-54	1.16E+00	2.57E+00	2.13E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Manganese-54	-1.34E-01	1.61E+00	9.39E-01	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Manganese-54	-4.15E-02	1.48E+00	8.71E-01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Nickel-63	7.00E+00	3.01E+01	1.83E+01	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Nickel-63	3.88E+00	3.15E+01	1.90E+01	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Nickel-63	-1.15E+01	3.76E+01	2.19E+01	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Nickel-63	-3.88E+00	1.87E+01	1.10E+01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Niobium-95	1.72E+00	2.12E+00	1.37E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Niobium-95	-3.55E-01	2.43E+00	1.69E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Niobium-95	1.10E+00	1.95E+00	1.55E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Niobium-95	1.39E+00	1.52E+00	8.50E-01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Total Strontium	-3.51E-01	5.13E-01	2.64E-01	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Total Strontium	2.21E-01	1.30E+00	7.93E-01	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Total Strontium	7.90E-02	9.37E-01	5.67E-01	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Total Strontium	-1.65E-01	1.41E+00	8.16E-01	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Tritium	-9.71E-01	2.77E+02	1.65E+02	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Tritium	-8.43E+01	2.39E+02	1.39E+02	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Tritium	-2.50E+01	3.33E+02	1.97E+02	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Tritium	1.27E+02	3.39E+02	2.11E+02	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Zinc-65	2.27E+00	3.15E+00	2.41E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Zinc-65	1.11E-01	5.54E+00	3.61E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Zinc-65	2.14E+00	3.31E+00	2.78E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Zinc-65	1.44E+00	3.14E+00	2.11E+00	pCi/L
WW2 Water Well 02(500502005) - DW	14-Jan-20	Zirconium-95	2.12E-01	3.43E+00	1.97E+00	pCi/L
WW2 Water Well 02(508985003) - DW	14-Apr-20	Zirconium-95	-1.10E+00	4.57E+00	3.57E+00	pCi/L
WW2 Water Well 02(514713001) - DW	7-Jul-20	Zirconium-95	1.06E+00	2.93E+00	1.79E+00	pCi/L
WW2 Water Well 02(523234002) - DW	6-Oct-20	Zirconium-95	4.69E-01	2.72E+00	1.58E+00	pCi/L